

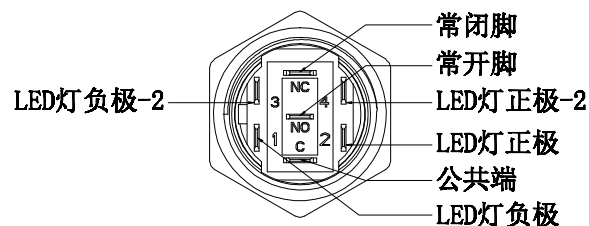

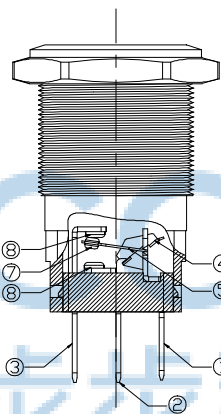
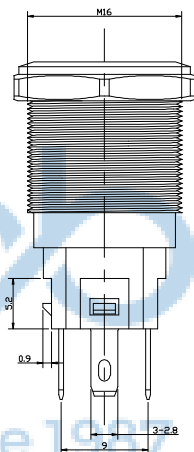


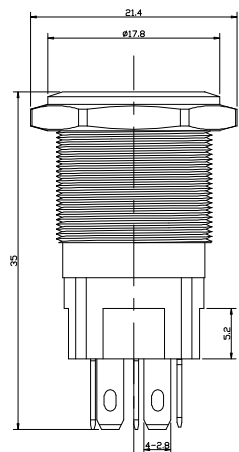


REV.	ECN NO	CONTENT	DATE	ENGINEER
A0		Initial release	/	

技术参数




1. 表面清洁, 光泽均匀;
2. 额定电压, AC250V/2. 5A
3. LED额定负载:
DC5V, 6V, 12V, 24V, 36V, 48V, AC110W, AC220V
4. 工作环境温度: -20° C-55° C;
5. 动作形式: 自锁式, 自复式;
6. 动作行程: 3mm
7. 动作力: 约25N;
8. 接线形式: 配套连接器插入; 焊接导线, 注意焊接时间与温度;
9. 拧紧力矩: 5-14N;
10. 开关组合: 1NO, 1NC;
11. 外观材料: 按键: PC/不锈钢; 外壳304/黄铜镀镍/铝合金氧化;
底座: PC; 触点: 银合金; 插脚: H62镀银;
12. 安装尺寸: 开孔直径 $\phi 16.2\text{mm}$; 面板厚度 $\leq 1\text{mm}$;
13. 防水等级: IP65;
14. 防爆等级: IK08;
15. LED灯珠使用寿命: 40000H
16. 触点接触电阻: $\leq 50\text{m}\Omega$
17. 绝缘电阻: $\geq 1000\text{M}\Omega$
18. 使用寿命:
电器部分: 5万次;
机械部分: 50万次.



序号	零件名称	数量	材料	表面处理/颜色
⑧	复合银点	2	$\phi 2.0 \times 0.6$	白色
⑦	银镍12	1	$\phi 1.4 \times 1.1$	白色
⑥	底座	1	尼龙	米白色
⑤	接触桥	1	磷铜 t=0.2	镀银
④	活动支板	1	磷铜 t=0.2	镀银
③	NC脚	1	H62 t=0.5	镀银
②	NO脚	1	H62 t=0.5	镀银
①	C脚	1	H62 t=0.5	镀银

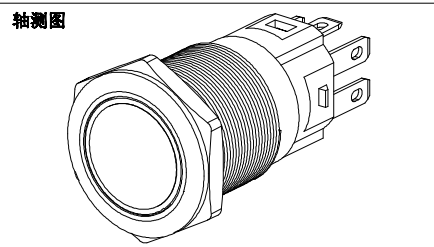

THIS DOC SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司	
.X: ± 0.38 .XX: ± 0.25 .XXX: ± 0.13		NAME: 金属开关 16E2-P10Z-E+DYB12V-N 复位自锁 带灯金属电源符号按钮开关 带环形螺丝脚	
APPD.	JM_Zheng	PJ. NO.: 904-070-230002-M4G	
CHKD.	LYX	SIZE: A4 DRW NO.:	
DR.	LHC	FINISH: SEE NOTES MAT'L.: SEE NOTES	
PDWG.NO: 0771-1		SCALE: N/A REV.: A0 UNIT: mm PAGE: 1/1	

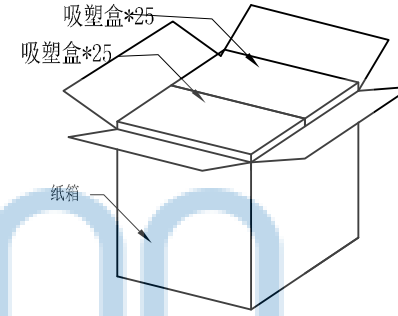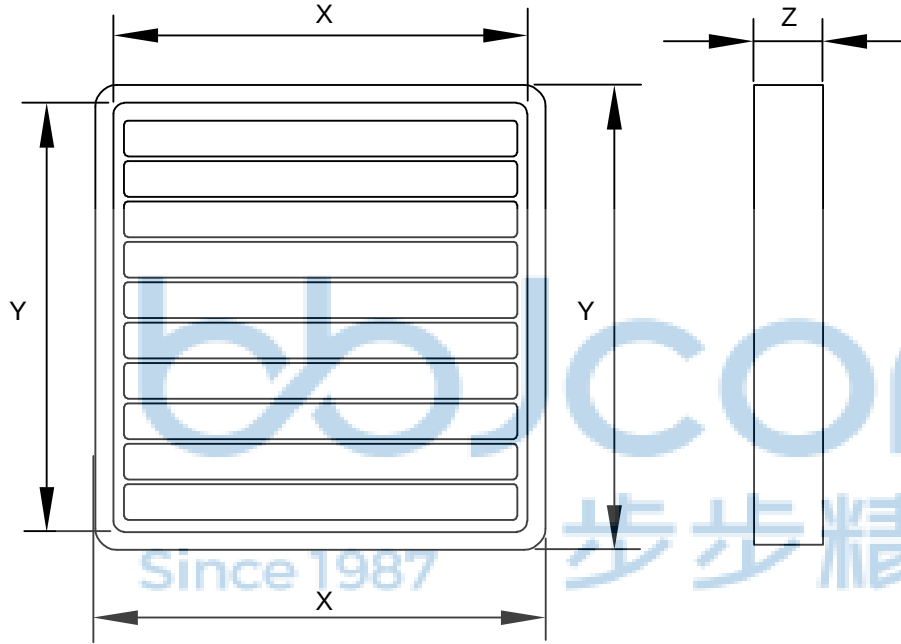

纸箱规格: 350*210*290



1. 包装要求:

- 1.1 每盒吸塑盒包装 50 pcs;
- 1.2 每50盘放一箱, 共计2500PCS;
- 1.3 纸箱外贴上标签



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.				深圳市步步精科技有限公司			
.X: ± 0.38 .XX: ± 0.25 .XXX: ± 0.13		X*: $\pm 3'$.X*: $\pm 2'$.XX*: $\pm 1'$		NAME: 金属开关 16E2-P10Z-E+DYB12V-N 复位自锁 带灯金属电源符号按钮开关 带环形螺丝脚			
APPD.		JM_Zheng		PJ. NO.: 904-070-230002-M4G			
CHKD.		LYX		SIZE: A4 DRW NO.:			
PDWG.NO: 0771-1		DR.		LHC		FINISH: SEE NOTES SCALE: N/A	
						REV.: A0 UNIT: mm	
						PAGE: 2/2	