

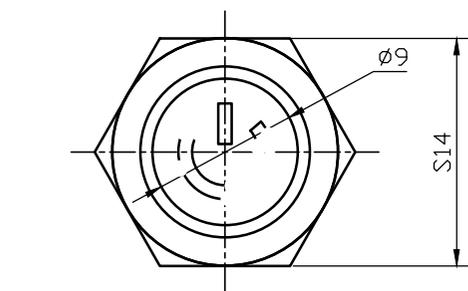

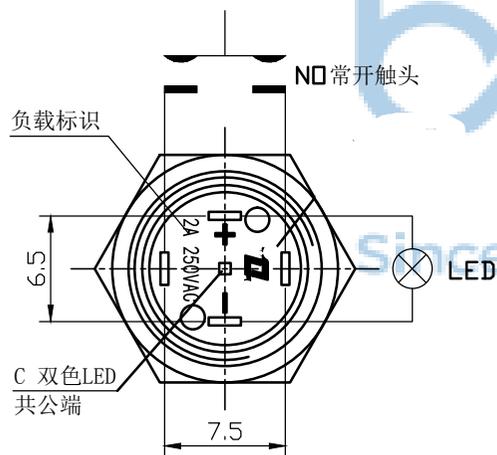


REV.	ECN NO	CONTENT	DATE	ENGINEER
A0		Initial release	/	




技术参数

- 表面清洁，光泽均匀；
- 额定电压：AC250V/2A；
- LED额定负载：
DC5V、6V、12V、24V、36V、48V，AC110V、AC220V；
- 工作环境温度：-20℃~+55℃；
- 动作形式：自复式；
- 动作行程：1.8mm；
- 动作力：约2N；
- 接线形式：
配套连接器插入；
焊接导线，注意焊接时间与温度；
- 拧紧力矩：5-14N.m；
- 开关组合：1NO；
- 外观材料：
按键：PC/不锈钢；
外壳：304/黄铜镀镍/铝合金氧化；
基座：PC；
触点：银合金；
插脚：H62镀银。
- 安装尺寸：
开孔直径 $\phi 12.2\text{mm}$ ；
面板厚度 $\leq 7\text{mm}$ 。
- 防水等级：IP65；
- 防爆等级：IK08；
- LED灯珠使用寿命：40000h；
- 触点接触电阻： $\leq 50\text{m}\Omega$ ；
- 绝缘电阻： $\geq 1000\text{M}\Omega$ ；
- 使用寿命：5万次。

紫		P
橙		O
白		W
黄		Y
蓝		B
绿		G
红		R
颜色	色标	符号

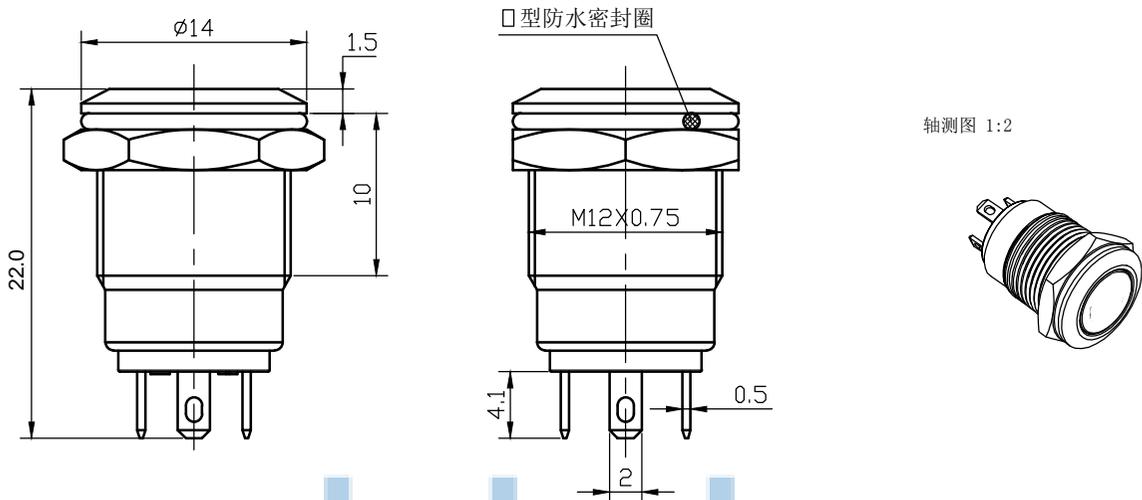

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co., Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司 NAME: 金属开关 12A-P10F-EB12V-N 复位带灯平头环形金属电源符号按钮开关 APPD. JM_Zheng PJ. NO.: 904-074-230002-M4G CHKD. LYX SIZE: A4 DRW NO.: FINISH: SEE NOTES MAT'L.: SEE NOTES PDWG.NO: 0771-1 DR. TSP SCALE: N/A REV.: A0 UNIT: mm PAGE: 1/1	
---	--	---	--

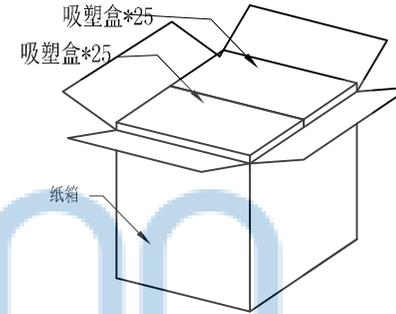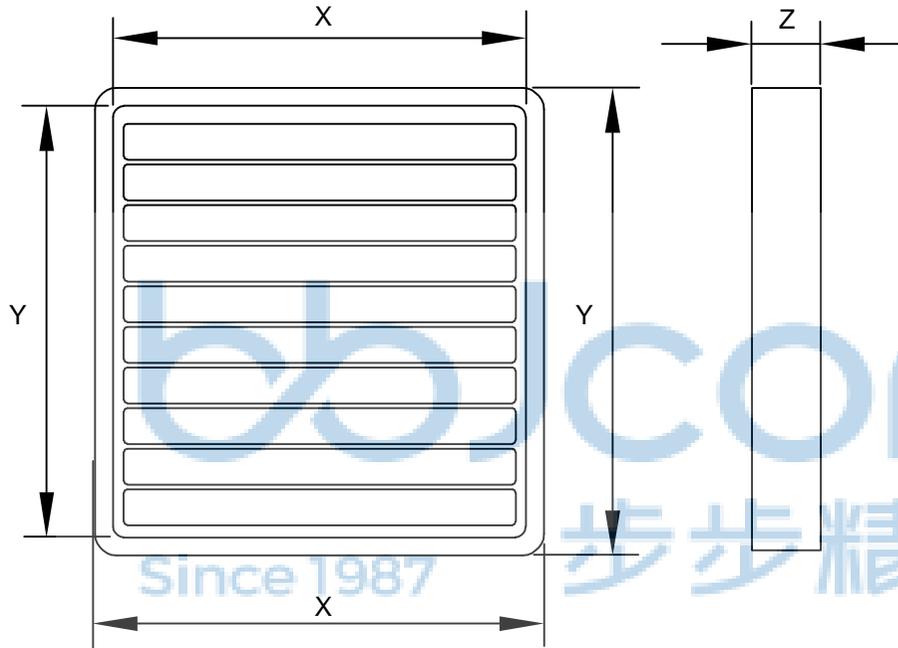

纸箱规格: 350*210*290



1. 包装要求:

- 1.1 每盒吸塑盒包装100pcs;
- 1.2 每50盘放一箱, 共计5000PCS;
- 1.3 纸箱外贴上标签



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司 .X: ±0.38 .XX: ±0.25 .XXX: ±0.13 X': ±3" X'': ±2" XX': ±1"		NAME: 金属开关 12A-P10F-EB12V-N 复位带灯平头环形金属电源符号按钮开关 PJ. NO.:904-074-230002-M4G SIZE: A4 DRW NO.: FINISH: SEE NOTES MAT'L.: SEE NOTES SCALE: N/A REV.: A0 UNIT: mm PAGE: 2/2	
APPD.	JM_Zheng	CHKD.	LYX	DR.	TSP
PDWG.NO: 0771-1					