

REV.	ECN NO	CONTENT	DATE	ENGINEER
A0		Initial release	/	

性能参数

- L1-导线长度: 默认150mm长;
- L2-线头长度: 默认10mm ;
- L3-剥头长度: 默认3mm;
- S-导线导体横截面积: 默认0.5平方mm、可选0.3平方mm;
- 线型拉力N: (0.15-0.25mm) 30N、(0.3mm²) 40N、(0.5mm²) 50N;
- 需要其它线长、线型、可以定制;



绂束代码使用说明

- Z1: 用于单色的指示灯、无开关功能;
- Z2: 用于双色的指示灯、无开关功能;
- W1: 用于1NO/1NO1NC 开关、无指示灯功能;
- D1: 用于1NO/1NO1NC 、单色指示灯带开关功能;
- S1: 用于1NO/1NO1NC 、双色指示灯带开关功能;

材质参数




- 插壳: 浅蓝色尼龙胶壳;
- 端子: 磷铜-y镀锡色;
- 导电线材: 紫铜;

1	2	3	4	5	6
16		A	—	■	/ ▲ / ▼
1	企业名称	深圳市步步精科技有限公司			
2	安装开孔	16mm			
3	系列编号	A (A型号金属按钮开关配套接插件)			
4	导线数量	Z1(2线)、Z2(3线)、W1(3线)、D1(5线)、S1(6线)			
5	导线长度	默认150mm、可以定制指定长度			
6	导线截面	3 (0.3mm ² 22AWG) 、 5 (0.5mm ² 20AWG)			

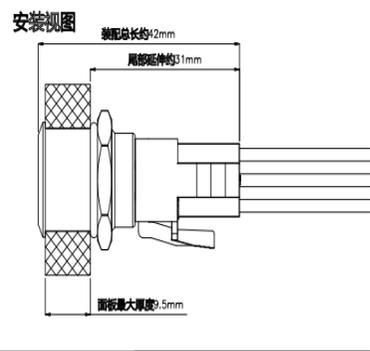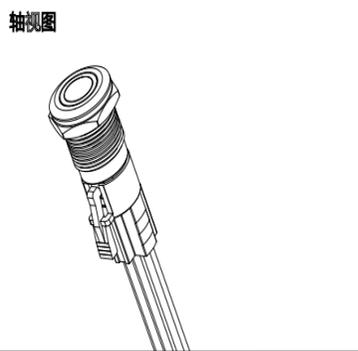

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司	
.X: ±0.38 .X': ±3' .XX: ±0.25 .X'': ±2' .XXX: ±0.13 .X''': ±1'		NAME: 金属开关 16E2-P10Z-E+DYB12V-N 金属电源符号按钮开关配套接插件	
APPD.	JM_Zheng	PJ. NO.: 904-074-230005-M4G	
CHKD.	LYX	SIZE: A4 DRW NO.:	
PDWG,NO:	0771-1	FINISH:	SEE NOTES
DR.	LHC	MAT'L.:	SEE NOTES
		SCALE:	N/A
		REV.:	A0
		UNIT:	mm
		PAGE:	1/1

REV.	ECN NO	CONTENT	DATE	ENGINEER
A0		Initial release	/	

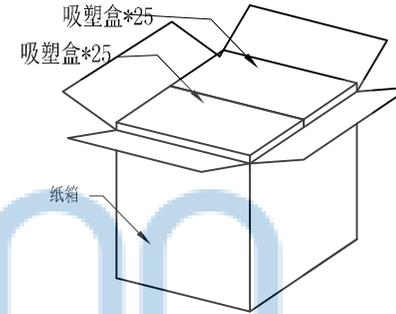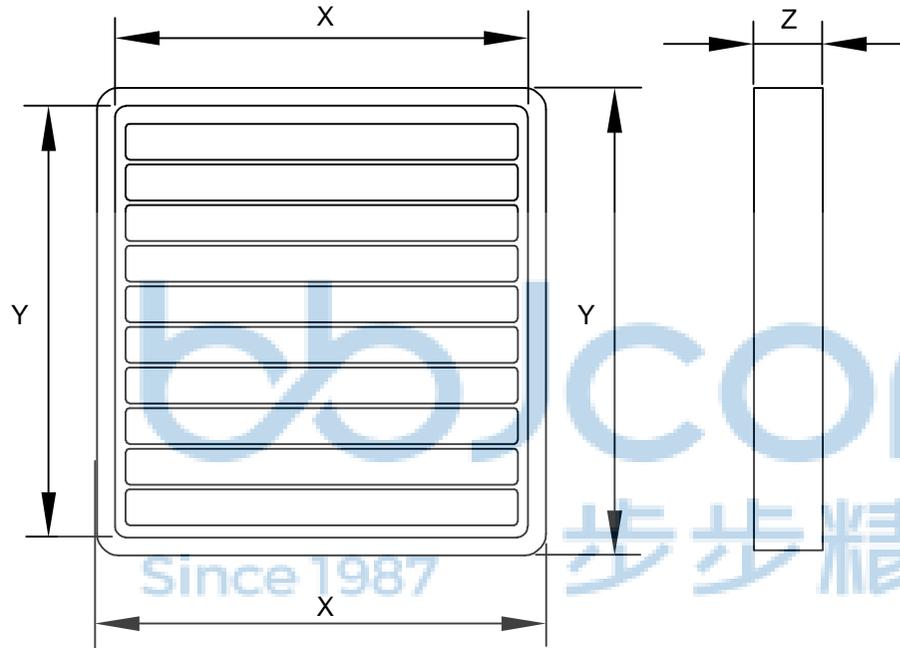

纸箱规格: 350*210*290



1. 包装要求:

- 1.1 每盒吸塑盒包装 25 pcs;
- 1.2 每50盘放一箱, 共计1250PCS;
- 1.3 纸箱外贴上标签



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司 .X: ±0.38 .XX: ±0.25 .XXX: ±0.13 X': ±3" X'': ±2" XX': ±1"		NAME: 金属开关 16E2-P10Z-E+DYB12V-N 金属电源符号按钮开关配套插件 PJ. NO.: 904-074-230005-M4G SIZE: A4 DRW NO.: FINISH: SEE NOTES MAT'L.: SEE NOTES SCALE: N/A REV.: A0 UNIT: mm PAGE: 2/2	
APPD.	JM_Zheng	CHKD.	LYX	DR.	LHC
PDWG.NO: 0771-1					