



REV.	ECN NO.	CONTENT	DATE	ENGINEER
A0		Initial release	/	TSP






性能参数

额定电流: 0.1A/DC36V;
 工作环境温度: -20°C~+55°C;
 按压行程: 0.5mm±0.1;
 接触行程: 0.5mm±0.1;
 按压扭力: ≤3N;
 NO脚反推扭力: ≤30N;
 焊接温度及时长: 320°C±20°C, 时长3秒以下;
 螺帽装配力矩: 5-14N.m;
 防护等级: IP67;
 防震等级: IK08;
 LED灯寿命: 40000h;
 LED灯功耗: 约20mA以下;
 接触电阻: ≤50mΩ;
 绝缘电阻: ≥50MΩ;
 电气寿命: 200000次以上;
 机械寿命: 1000000次以上;

材质参数

发光区域: PC;
 按键: 不锈钢;
 外壳: 不锈钢;
 O型圈: 硅胶;
 固定螺帽: 黄铜镀镍;
 底座: PBT;
 LED引脚: H62电镀锡;
 NO引脚: H62电镀金;

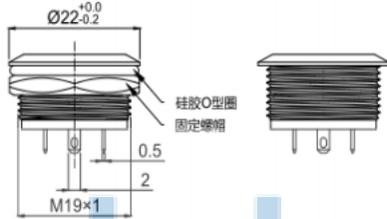


注: 未标注公差按照GB/T1804-m级为准。

轴视图



安装视图



1	2	3	4	5	6	7	8	9	10	11		
	19	G	-	P	10	F	/	E	▲	▼	/	○
1	企业名称											
2	安装开孔	19mm										
3	系列编号	G (G型号金属微行程开关)										
4	头部类型	P (平头) 、 G (高头)										
5	开关组合	10 (1NO, 1常开)										
6	操作类型	F (自复式)										
7	发光类型	E (环形)										
8	发光颜色	R (红光) 、 G (绿光) 、 B (蓝光) 、 Y (黄光) 、 W (白光) 、 O (橙光)										
9	额定电压	DC.3V~48V (可定制)										
10	外壳材质	S (不锈钢304本色) 、 ST (不锈钢镀钛色)										
11	脚位类型	Y (引脚式) 此款型号可不表达										

型号编码规则说明

12	D	★	◆	■	/	○	▲	▼	/	○
(ouze li)	安装孔直径 (The installation hole diameter)	系列号 (Q.)	头部形状 (Head shape) P 平圆形 (Flat round) G 高平圆形 (Gaoping circular)	开关组合 (Switch combination) 10—1NO (NO 为常开 Normally open,)	操作类型 (Operation type) F 自复式 (Since the double entry))	发光类型 (Light type) D 单点 (A single point) E 环形 (ring) DY 电源符号 (Power symbol)	发光颜色 (Emitting light colors) R—红 G—绿 B—蓝 Y—黄 W—白 O—橙 P—紫	带灯电压 (The lamp voltage) (AV/DC, V) 6 12 24 36 48 220	外壳材质 (Shell material) S 不锈钢 (Stainless steel) N 黄铜镀镍 (Brass nickel plated)	

注: 不带灯的无需填写○发光类型、▲发光颜色、▼带灯电压参数 (Note: do not need to fill in it without light luminous type, bring about luminous color, ▼ parameters with lamp voltage)

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co., Ltd. CORPORATION AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.

PDWG.NO: 0771-1

DR. TSP

APPD. JM_Zheng

CHKD. LYX




NAME: 金属开关 19A-G11-N 复位自锁同款高头无灯 金属电源符号按钮开关

PJ. NO.: 904-100-230009-M4G

SIZE: A4 DRW NO.:

FINISH: SEE NOTES MAT'L.: SEE NOTES

SCALE: N/A REV.: AO UNIT: mm PAGE: 1/1

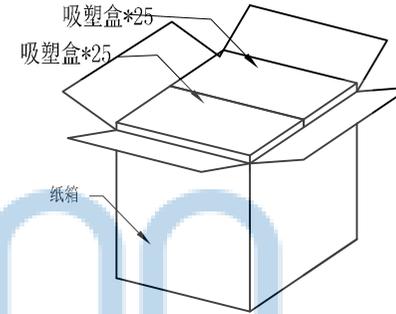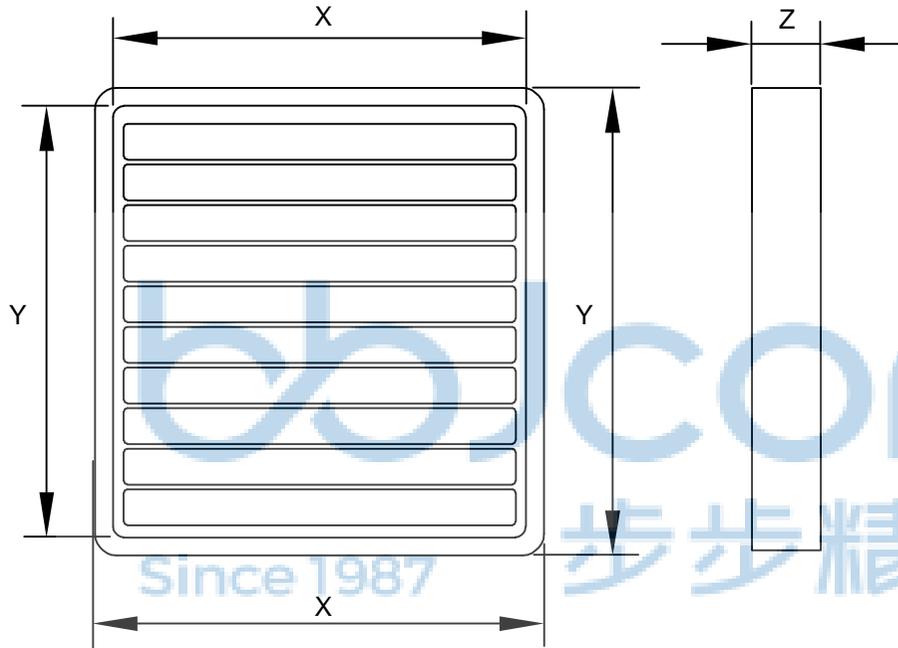

纸箱规格: 350*210*290



1. 包装要求:

- 1.1 每盒吸塑盒包装 50 pcs;
- 1.2 每50盘放一箱, 共计2500PCS;
- 1.3 纸箱外贴上标签



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司 .X: ±0.38 .XX: ±0.25 .XXX: ±0.13 X': ±3" .X': ±2" .XX': ±1"		NAME: 金属开关 19A-G11-N 复位自锁同款高头无灯 金属电源符号按钮开关 P.J. NO.: 904-100-230009-M4G SIZE: A4 DRW NO.: FINISH: SEE NOTES MAT'L.: SEE NOTES SCALE: N/A REV.: A0 UNIT: mm PAGE: 2/2	
PDWG.NO: 0771-1	DR.	TSP	APPD.	JM_Zheng	
			CHKD.	LYX	