

NOTES:

1. ELECTRONIC:

CONTACT CURRENT RATING: 1.5A
CONTACT RESISTANCE: 30mohm Max
INSULATION RESISTANCE: 100 Megohms Min
WITHSTAND VOLTAGE: AC100V, 1Min.

2. MECHANICAL:

MATING FORCE: 3.57KG Max
UNMATED FORCE: 0.8KG Min
DURABILITY: 1500 CYCLES

3. ENVIRONMENT CHARACTERISTICS:

OPERTING TEMPERATURE: -40° C TO +85° C



Pin NUMBER	SIGNAL NAME
1	VBUS
2	D-
3	D+
4	GND
5	StdA_SSRX-
6	StdA_SSRX+
7	GND_DRAIN
8	StdA_SSTX-
9	StdA_SSTX+
Shell	Shield

4. MATERIAL LIST:

3	SHELL	1	SUS	NI PLATED
2	CONTACT	9	COPPER ALLOY	AU /TIN PLATED
1	HOUSING	1	THERMOPLASTIC(LCP)	(UL 94V-0) BLUE
No.	PART NAME	QTY	MATERIAL	REMARK

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co., Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
OR IN PART WITHOUT
PRIOR WRITTEN PERMISSION.

PDWG. NO: 0301-1

深圳市步步精科技有限公司

.X: ±0.38 X': ±3'
.XX: ±0.25 X'': ±2'
.XXX: ±0.13 .XX': ±1'

APPD. JM_Zheng

CHKD. LYX

DR. SGF

NAME: USB3.2 Gen2 母座 沉板3.62 两脚插两脚贴 端子SMT
卷边 不锈钢外壳 L=14.25 CH=0.76 端子镀金gf 编带

PJ. NO.: 127-271-090003-H2G


SIZE: A4 DRW NO.:

FINISH: SEE NOTES MAT'L.: SEE NOTES

SCALE: N/A REV.: A0 UNIT: mm PAGE: 1/2



REV.	ECN NO	CONTENT	DATE	ENGINEER
A0		Initial release	/	SGF

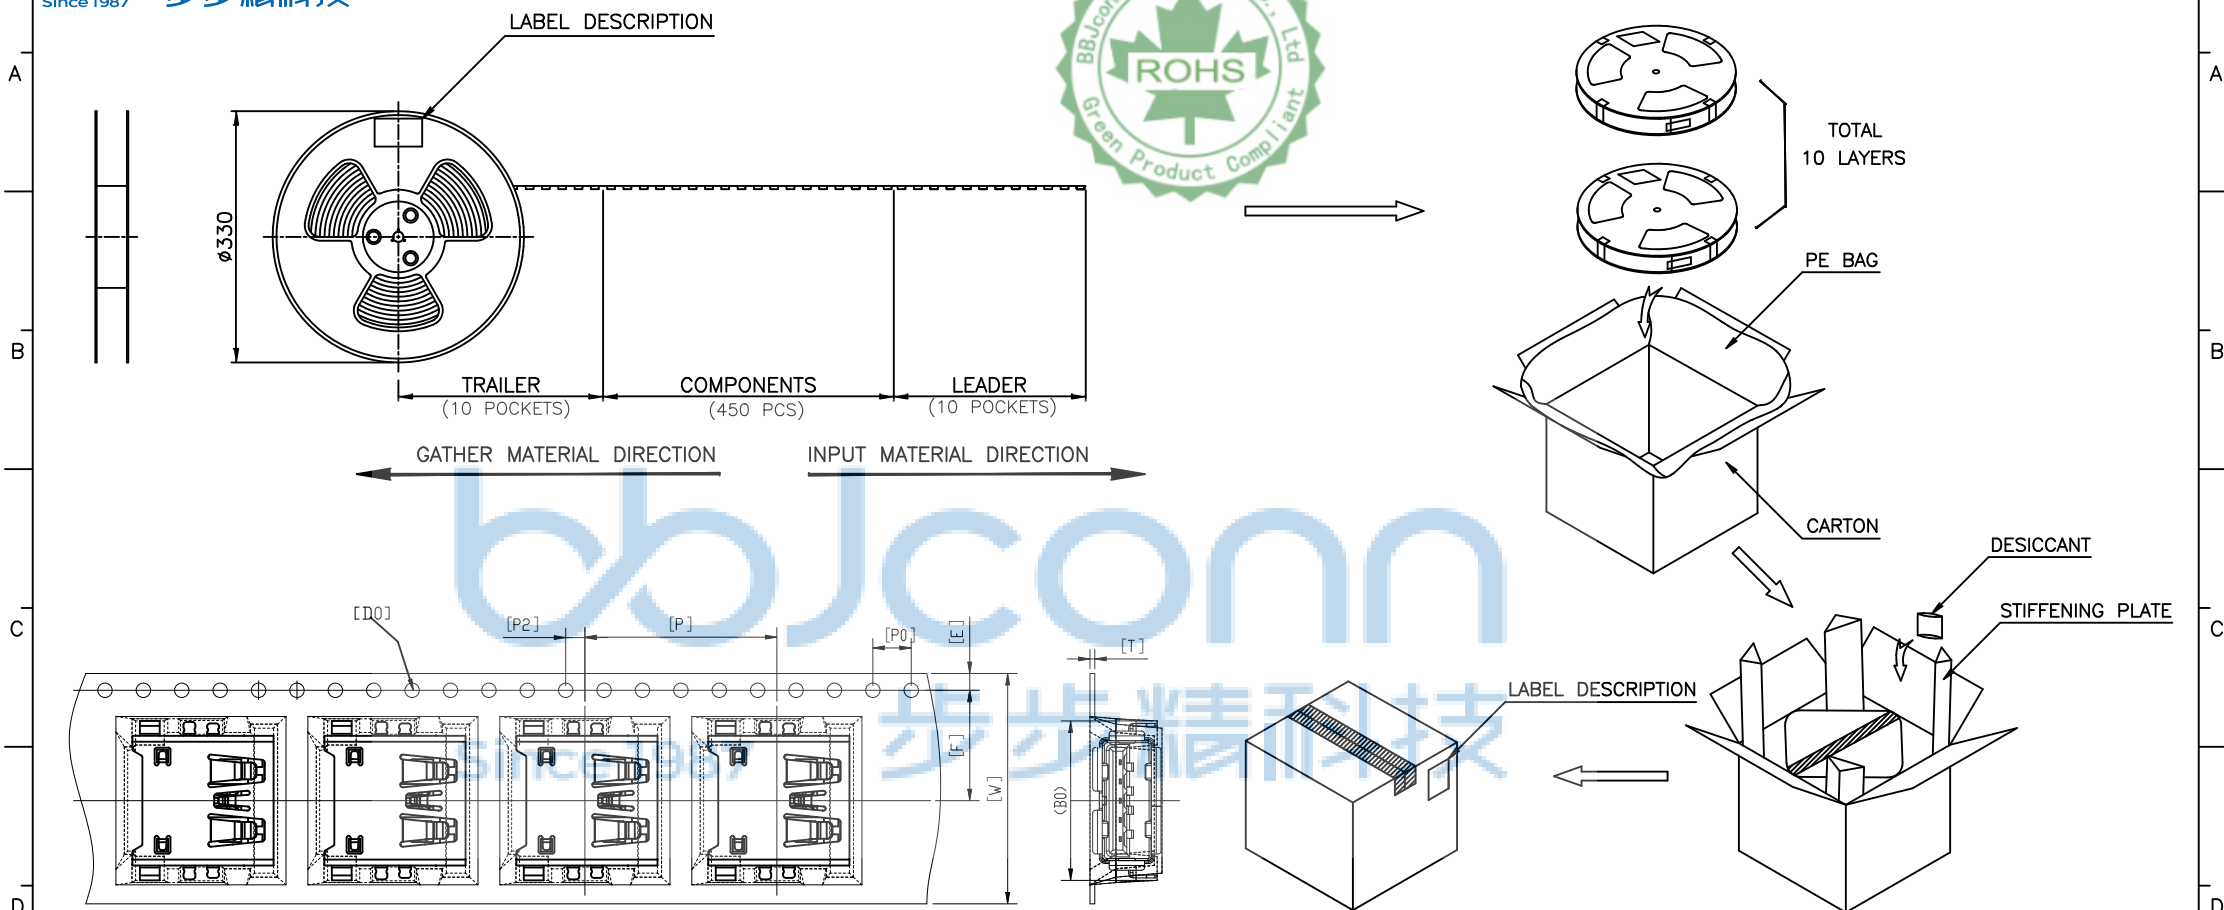

	REEL/TRAY	CARTON
CONNECTOR (PCS)	450	4500

W	24.00 ^{+0.30} _{-0.30}	T	0.40±0.05	Po	4.00±0.10	Ao	15.20±0.10
S		F	11.50±0.10	P2	2.00±0.10	Bo	16.6±0.10
E	1.75±0.10	P	20.00±0.10	Do	ø1.50 ± 0.10	Ko	7.50±0.10

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co., Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION. PDWG. NO: 0301-1		深圳市步步精科技有限公司 APPD. JM_Zheng CHKD. LYX DR. SGF		NAME: USB3.2 Gen2 母座 沉板3.62 两脚插两脚贴 端子SMT 卷边 不锈钢外壳 L=14.25 CH=0.76 端子镀金gf 编带 PJ. NO.: 127-271-090003-H2G SIZE: A4 DRW NO.: FINISH: SEE NOTES MAT'L: SEE NOTES SCALE: N/A REV.: A0 UNIT: mm PAGE: 2/2
---	--	---	--	--