



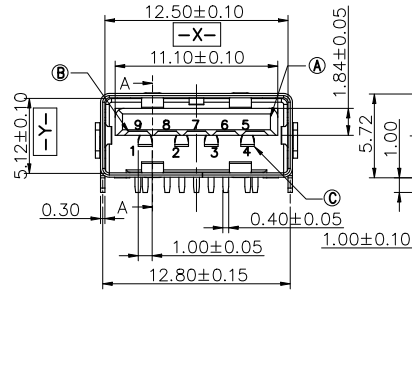


RoHS +HF Compliant

bbJconn
Since 1987 步步精科技

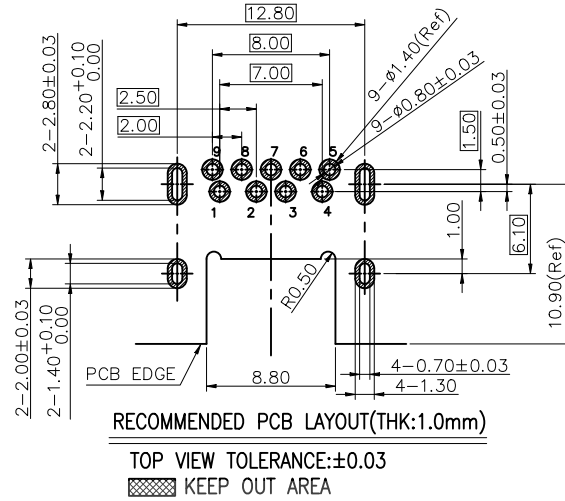

3D VIEW

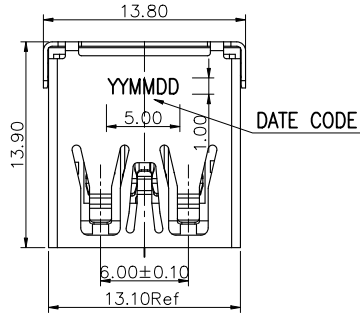

Pin #	SIGNAL NAME
1	VBUS
2	D-
3	D+
4	GND
5	StdA_SSRX-
6	StdA_SSRX+
7	GND_DRAIN
8	StdA_SSTX-
9	StdA_SSTX+
Shell	Shield

①	SHELL	1	SUS304 T=0.30mm	ALL OVER 50u" Ni. Min
②	4P TERMINAL	4	PHOSPHOR BRONZE t=0.25mm	Au 30u" ON CONTACT AREA;
③	5P TERMINAL	5	PHOSPHOR BRONZE t=0.25mm	MATTE Tin 80u"Min ON SOLDER
④	HOUSING	1	PA9T UL94V-0	AREA:ALL OVER 50u" Ni. Min
NO.	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
CORPORATION AND SHOULD
NOT BE USED IN WHOLE
OR IN PART WITHOUT
PRIOR WRITTEN PERMISSION.
PDWG.NO: 9999-9

NAME: USB 3.1 AF 90° DIP 前直脚1.0 后鱼叉脚1.8 H=5.7 CH=2.86 L=13.7 锡脚长1.5 平口 PA9T 黑胶 不锈钢壳带后盖 端子镀金30u	PJ. NO.: 127-272-040005-00G
SIZE: A4 DRW NO.: AC23-0019	FINISH: SEE NOTES MAT'L: SEE NOTES
SCALE: N/A REV.: A0 UNIT: mm	PAGE: 1/2

SPECIFICATIONS:




- MATERIAL
 - SHELL: STAINLESS STEEL
 - CONTACT: COPPER ALLOY
 - THE HIGH TEMPERATURE PLASTIC
- ELECTRICAL CHARACTERISTICS:
 - CURRENT RATING: 1.8A (PIN1~4); OTHER CONTACTS 0.25A
 - CONTACT RESISTANCE: 30mΩ MAX.
 - DIELECTRIC WITHSTANDING VOLTAGE: 100V AC FOR 1 MINUTE
 - INSULATION RESISTANCE: 100MΩ MIN
 - THIS PRODUCT SUPPORTS GEN2(10G)
- MECHANICAL CHARACTERISTICS:
 - INSERTION FORCE: 35N MAX. RATE 12.5MM/1 MINUTE
 - WITHDRAWAL FORCE: 10N MIN. INITIAL, 8N AFTER DUALITY, RATE: 125MM/1 MINUTE
- DURABILITY: 5,000 CYCLES
- FOR IR-REFLOW LEAD-FREE PROCESS
- OPERATING TEMPERATURE: -25° C ~ +75° C



RoHS +HF Compliant


bbJconn
Since 1987 步步精科技

REV.	ECN NO.	CONTENT	DATE	ENGINEER
A0		增加外壳后盖, 变更外壳底部凸部长度, 增加外壳与端子间距标注, 修改燕尾扣与实物一致		LYX

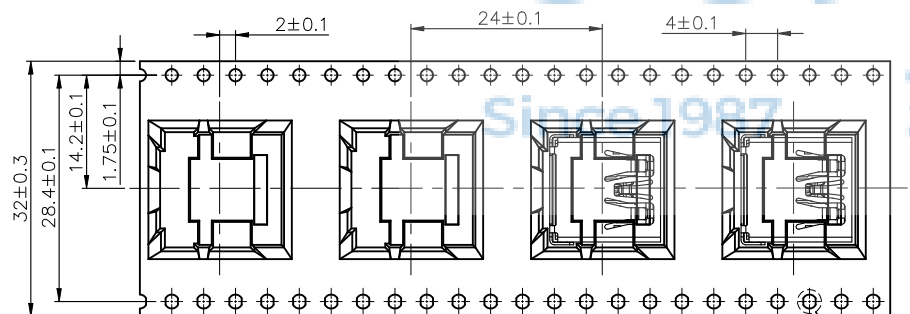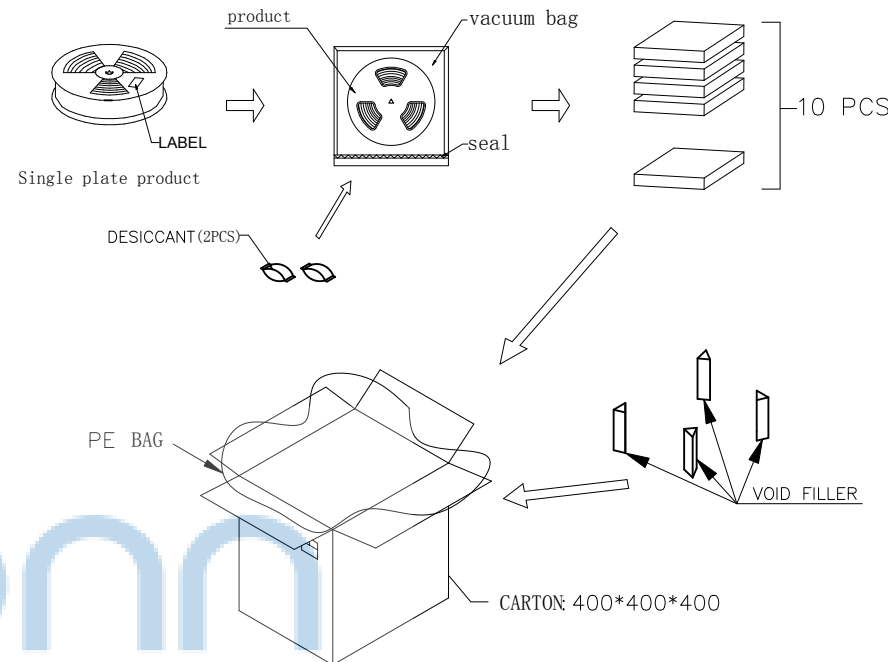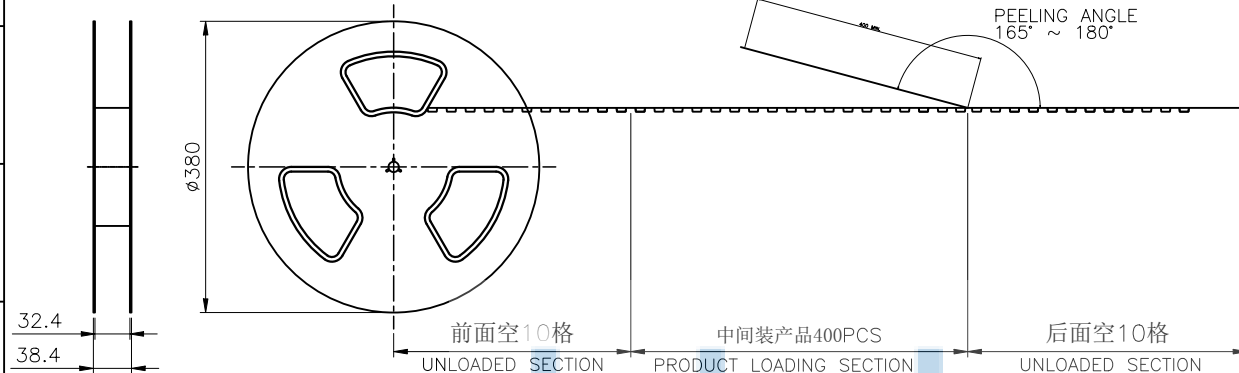

NOTE:

- MATERIAL:
 - BOX: FIBREBOARD, CORRUGATED, DOUBLE WALL.
 - TAPE: POLYSTYRENES, HEAT-RESISTANT TEMPERATURE: 120°C , TRANSPARENT COLOR.
 - REEL: POLYSTYRENES, HEAT-RESISTANT TEMPERATURE: 70°C , BLUE COLOR.
 - BAG: POLYETHYLENE, HEAT-RESISTANT TEMPERATURE: 100°C .
- PEELING STRENGTH: $0.1 \sim 1.3 \text{ N}$ ($10 \sim 130 \text{ GRAMS}$)
- PEELING SPEED: 300 mm/min .



400	10	4000 PCS	--KG	--KG	1.75g
PCS/ REEL	REELS/ CARTON	QUANTITY	GROSS WEIGHT	NET WEIGHT	SINGLE WEIGHT

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co., Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		.X: ± 0.38 .XX: ± 0.25 .XXX: ± 0.13		X': $\pm 3^{\circ}$.X': $\pm 2^{\circ}$.XX': $\pm 1^{\circ}$		NAME: USB 3.1 AF 90° DIP 前直脚1.0 后鱼叉脚1.8 H=5.7 CH=2.86 L=13.7 锡脚长1.5 平口 PA9T 黑胶 不锈钢壳带后盖 端子镀金30u	
APPD.		P.J. NO.: 127-272-040005-00G		SIZE: A4 DRW NO.: AC23-0019		FINISH: SEE NOTES MAT'L: SEE NOTES	
CHKD.		SCALE: N/A		REV.: A0		UNIT: mm	
PDWG. NO: 9999-9	DR.					PAGE: 2/2	