

REV.	ECN NO	CONTENT	DATE	ENGINEER
A0		Initial release	/	GZY

NOTE:

1. MATERIAL:

1.1 INSULATOR:HIGH TEMPERATURE PLASTIC

1.2 CONTACT:BRONZE

1.3 SHELL:SUS 304

2. ELECTRICAL CHARACTERISTICS;

2.1 CONTACT RESISTANCE:30mΩ MAX

2.2 CONTACT CURRENT RATING:1.8A

2.3 DIELECTRIC WITHSTANDING VOLTAGE:100 V R. M. S.

2.4 INSULATION RESISTANCE 100 MΩ MIN

2.5 OPERATING TEMPERATURE:-40° C ~ 85° C

3 MECHANICAL CHARACTERISTICS:

3.1 MATING FORCE:3.5 kgf MAX.

3.2 UNMATING FORCE:10N 25N.

3.3 DURABILITY:MANDATORY:5,000 CYCLES

4. PLATING




4.1 TERMINAL:

50u" MIN NICKEL ALL OVER




100u"MIN Tin ON SOLDER AREA

(1~30)u"Au ON CONTACT AREA

4.2 SHELL:80u"MIN. NICEL ALL OVER


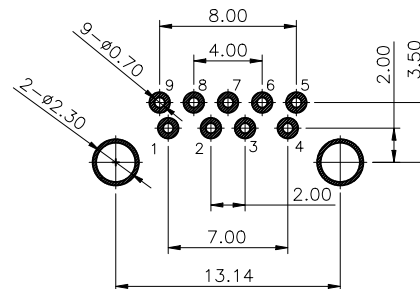
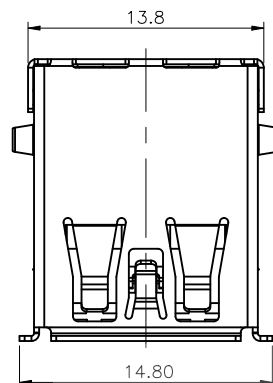



RECOMMENDED P.C.B LAYOUT, T=1.60mm
P.C.B TOLERANCES ±0.05mm
(TOP VIEW)

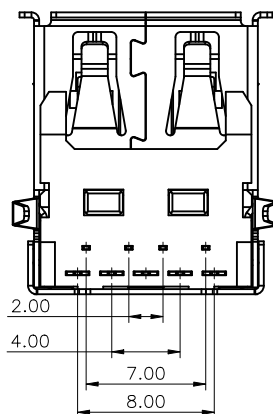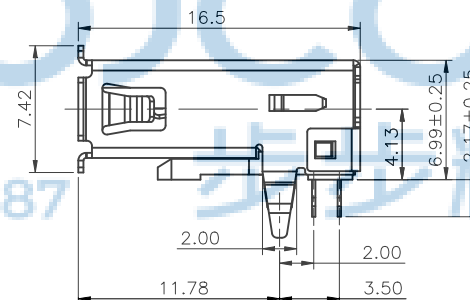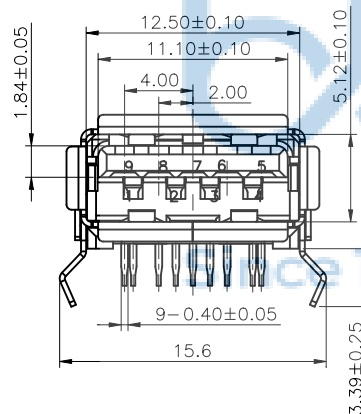

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION. PDWG,NO: 0536-1		 深圳市步步精科技有限公司		NAME: USB 3.1 AF 90度 外壳两脚DIP 端子DIP L=16.5 CH=4.13 脚距15.6 卷边 不锈钢外壳 端子脚长2.17 镀金足1u 编带	
APPD. JM_Zheng		PJ. NO.: 127-272-090006-P2G		SIZE: A4 DRW NO.:	
CHKD. LYX		FINISH: SEE NOTES		MAT'L.: SEE NOTES	
DR. GZY		SCALE: N/A		REV.: A0	UNIT: mm PAGE: 1/2

REV.	ECN NO	CONTENT	DATE	ENGINEER
A0		Initial release	/	GZY

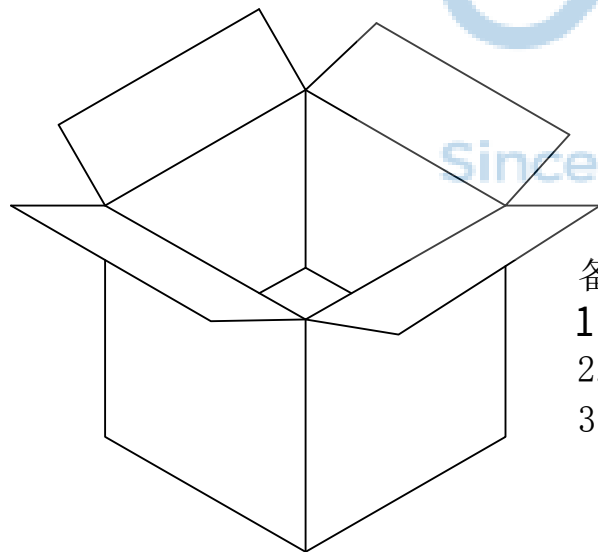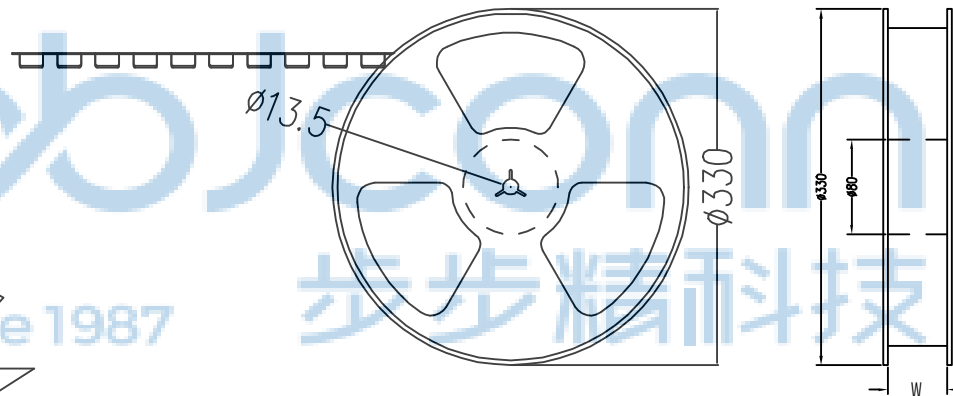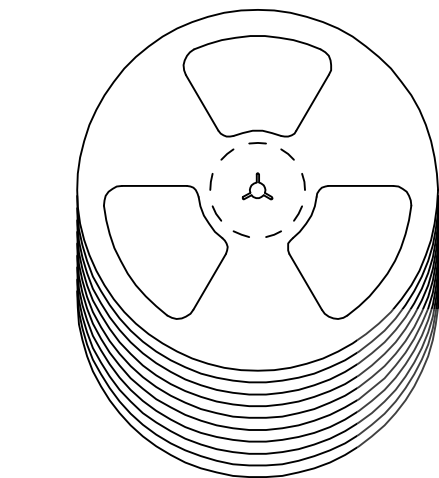

备注:

1. 包装数量：300/PCS/卷，10卷/箱
2. 包装袋长度：每卷前后各空10-20个空格，中间包装。
3. 材质：
载体：聚丙烯（PS），
上带：聚乙烯（PET），
卷盘：聚苯乙烯。

纸箱规格：345*345*230MM

纸箱规格：345*345*350MM

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION. PDWG.NO: 0536-1			深圳市步步精科技有限公司			
	.X: ±0.38 .XX: ±0.25 .XXX: ±0.13		X*: ±3* .X*: ±2* .XX*: ±1*		NAME: USB 3.1 AF 90度 外壳两脚DIP 端子DIP L=16.5 CH=4.13 脚距15.6 卷边 不锈钢外壳 端子脚长2.17 镀金足1u 编带	
	APPD. JM_Zheng				PJ. NO.: 127-272-090006-P2G	
	CHKD. LYX				SIZE: A4 DRW NO.:	
			FINISH: SEE NOTES		MAT'L.: SEE NOTES	
	DR. GZY		SCALE: N/A REV.: A0		UNIT: mm PAGE: 2/2	