

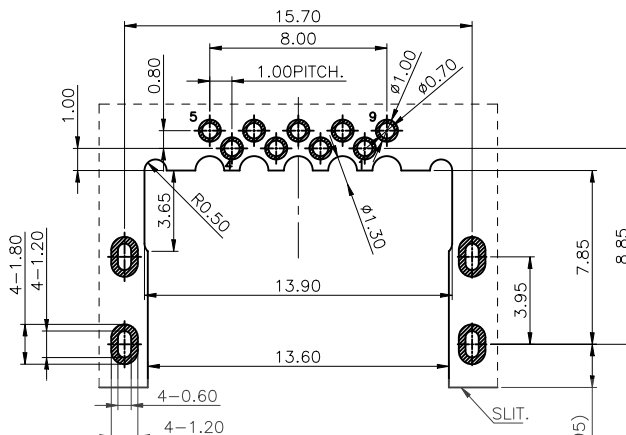
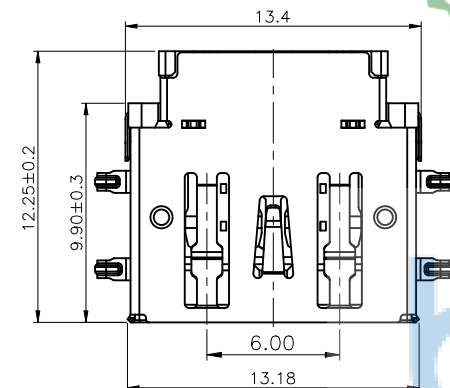

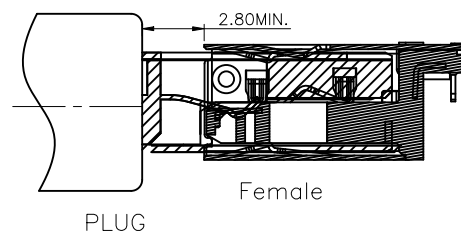

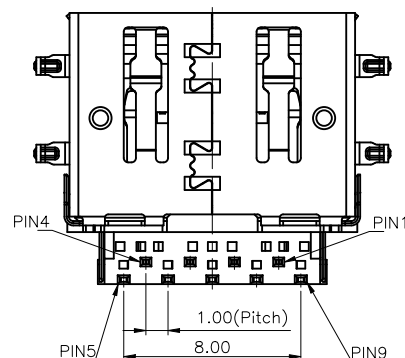
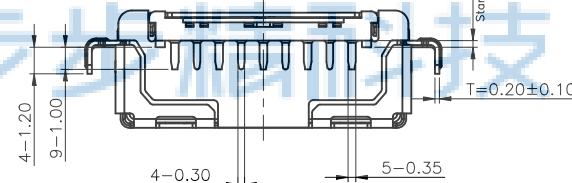


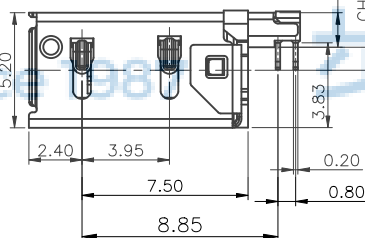

Recommended PCB Layout THK=1.0mm
TOLERANCE=±0.05

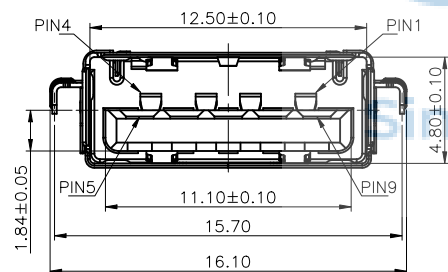

NOTE:

1. MATERIAL:

1.1 INSULATOR:HIGH TEMPERATURE PLASTIC UL 94 V-0;BLACK (PA9T)

1.2 CONTACT: 4P:C5191 5P:C2680

1.3 SHELL:SUS 304

2. ELECTRICAL CHARACTERISTICS;

2-1. CURRENT RATING:1.8A (PIN 1,4) ; OTHER CONTACTS 0.25A

2-2. CONTACT RESISANCE 30mΩ Max.

2-3. DIELECTRIC WITHSTANDING VOLTAGE:100V AC FOR 1 MINUTE

2-4. INSULAINON RESISANCE:100MΩ MIN.

3 MECHANICAL CHARACTERISTICS:

MATING FORCE: 3.5kgf Max

Extraction FORCE:1.0kgf Min INITIAL; 8kgfMin AFTER TESTOperating

4.1 TERMINAL:

60u" MIN NICKEL ALL OVER





100u"MIN Tin ON SOLDER AREA

(1~30)u"Au ON CONTACT AREA

4.2 SHELL:60u"MIN. NICEL ALL OVER

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION. PDWG.NO: 0536-1		深圳市步步精科技有限公司 .X: ±0.38 .XX: ±0.25 .XXX: ±0.13 X': ±3" X': ±2" XX': ±1"		NAME: USB 3.1 AF 90度 外壳四脚DIP 端子DIP L=12.25 反向沉板3.83 CH=1.04 外壳脚距15.70 平口 不锈钢外壳 镀金足1u 编带 PJ. NO.: 127-272-090007-P2G SIZE: A4 DRW NO.: FINISH: SEE NOTES MAT'L.: SEE NOTES SCALE: N/A REV.: A0 UNIT: mm PAGE: 1/2	
APPD.	JM_Zheng				
CHKD.	LYX				
DR.	GZY				



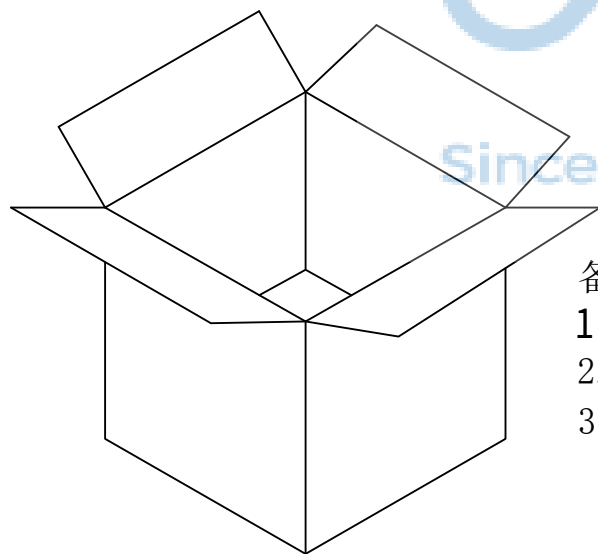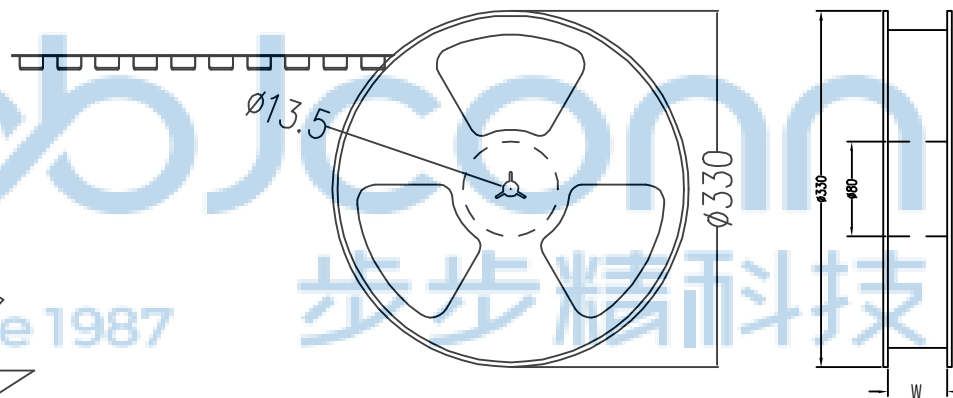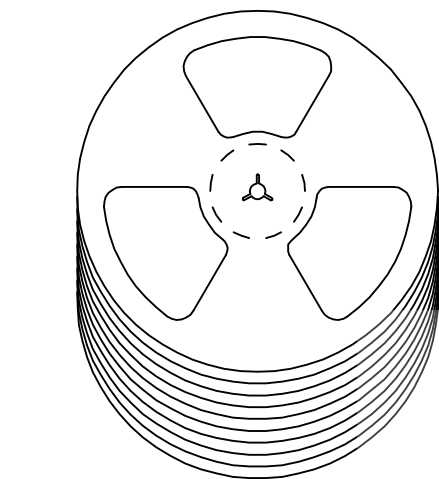

备注:

1. 包装数量: 500/PCS/卷, 10卷/箱
2. 包装袋长度: 每卷前后各空10-20个空格, 中间包装。
3. 材质:
载体: 聚丙烯 (PS),
上带: 聚乙烯 (PET),
卷盘: 聚苯乙烯。

纸箱规格: 345*345*230MM

纸箱规格: 345*345*350MM

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION. PDWG.NO: 0536-1		深圳市步步精科技有限公司		NAME: USB 3.1 AF 90度 外壳四脚DIP 端子DIP L=12.25 反向沉板3.83 CH=1.04 外壳脚距15.70 平口 不锈钢外壳 镀金足1u 编带	
.X: ±0.38 .XX: ±0.25 .XXX: ±0.13	X*: ±3" .X*: ±2" .XX*: ±1"	APPD.	JM_Zheng	PJ. NO.: 127-272-090007-P2G	
		CHKD.	LYX	SIZE: A4	DRW NO.:
		DR.	GZY	FINISH: SEE NOTES	MAT'L.: SEE NOTES
				SCALE: N/A	REV.: A0
				UNIT: mm	PAGE: 2/2