

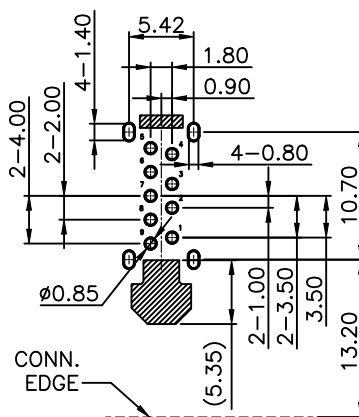
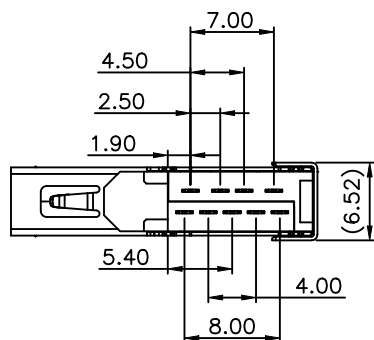

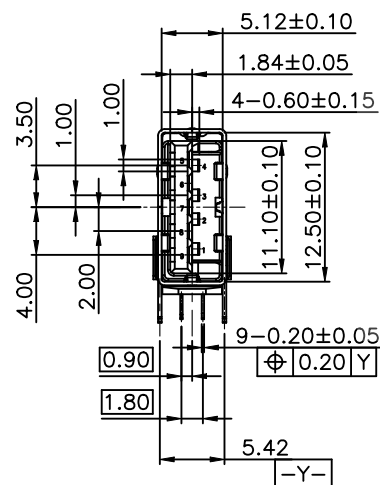
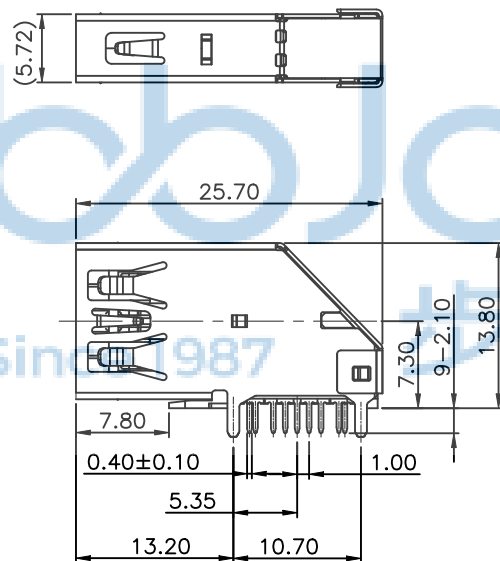
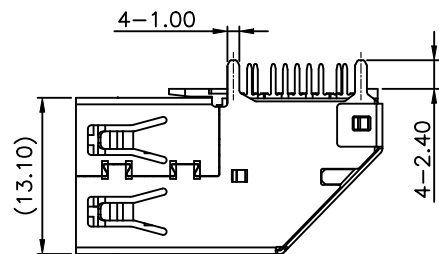


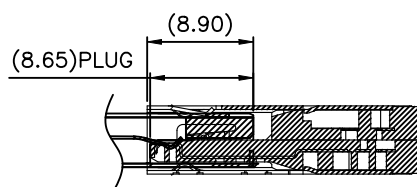

RECOMMENDED PCB LAYOUT
PCB T=1.60MM TOL: ±0.05

STAND OFF AREA(PLASTIC)



MATING DRAWING

REV.	ECN NO	CONTENT	DATE	ENGINEER
A0		Initial release	/	SGF

NOTE:

1. MATERIAL:

1.1 INSULATOR: LCP BLUE

1.2 CONTACT: 4P C5191 T=0.20mm

1.3 CONTACT: 5P C2680 T=0.20mm

1.4 SHELL:SUS 201 T=0.30mm

2. ELECTRICAL CHARACTERISTICS;

2.1 CONTACT RESISTANCE: 30mΩ MAX

2.2 CONTACT CURRENT RATING: 1.5A

2.3 DIELECTRIC WITHSTANDING VOLTAGE: 100 V R. M. S.

2.4 INSULATION RESISTANCE 100 MΩ MIN

2.5 OPERATING TEMPERATURE: -40° C ~ 85° C

3. MECHANICAL CHARACTERISTICS:

3.1 MATING FORCE: 3.57 kgf MAX.

3.2 REMOVAL FORCE: 1.0 kgf Min

3.3 DURABILITY: MANDATORY: 5,000 CYCLES

3.4. SALT SPRAY 48HR PASS.

4.1 TERMINAL:

50u" MIN NICKEL (CONTACT AREA) 100u" MIN Tin ON

SOLDER AREA (1~30) u" Au ON CONTACT AREA

4.2 SHELL: 50u" MIN. NICKEL



Pin Number	Signal Name	Pin Number	Signal Name
1	VBUS	5	SSRX-
2	D-	6	SSRX+
3	D+	7	GND
4	GND	8	SSTX-
Shell	Shield	9	SSRT+

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co., Ltd.

Corporation AND SHOULD
NOT BE USED IN WHOLE

OR IN PART WITHOUT
PRIOR WRITTEN PERMISSION.

PDWG.NO: 0536-1

深圳市步步精科技有限公司

.X: ±0.38 .X': ±3'
.XX: ±0.25 .X': ±2'
.XXX: ±0.13 .X': ±1'

APPD. JM_Zheng

CHKD. LYX

DR. SGF


NAME: USB 3.1 AF 90度 外壳四脚DIP 端子DIP 侧插 L=25.70
H=13.8 脚距10.70 平口 不锈钢外壳 镀金足1u 编带

PJ. NO.: 127-272-090011-P2G

SIZE: A4 DRW NO.:

FINISH: SEE NOTES MAT'L: SEE NOTES

SCALE: N/A REV.: A0 UNIT: mm PAGE: 1/2

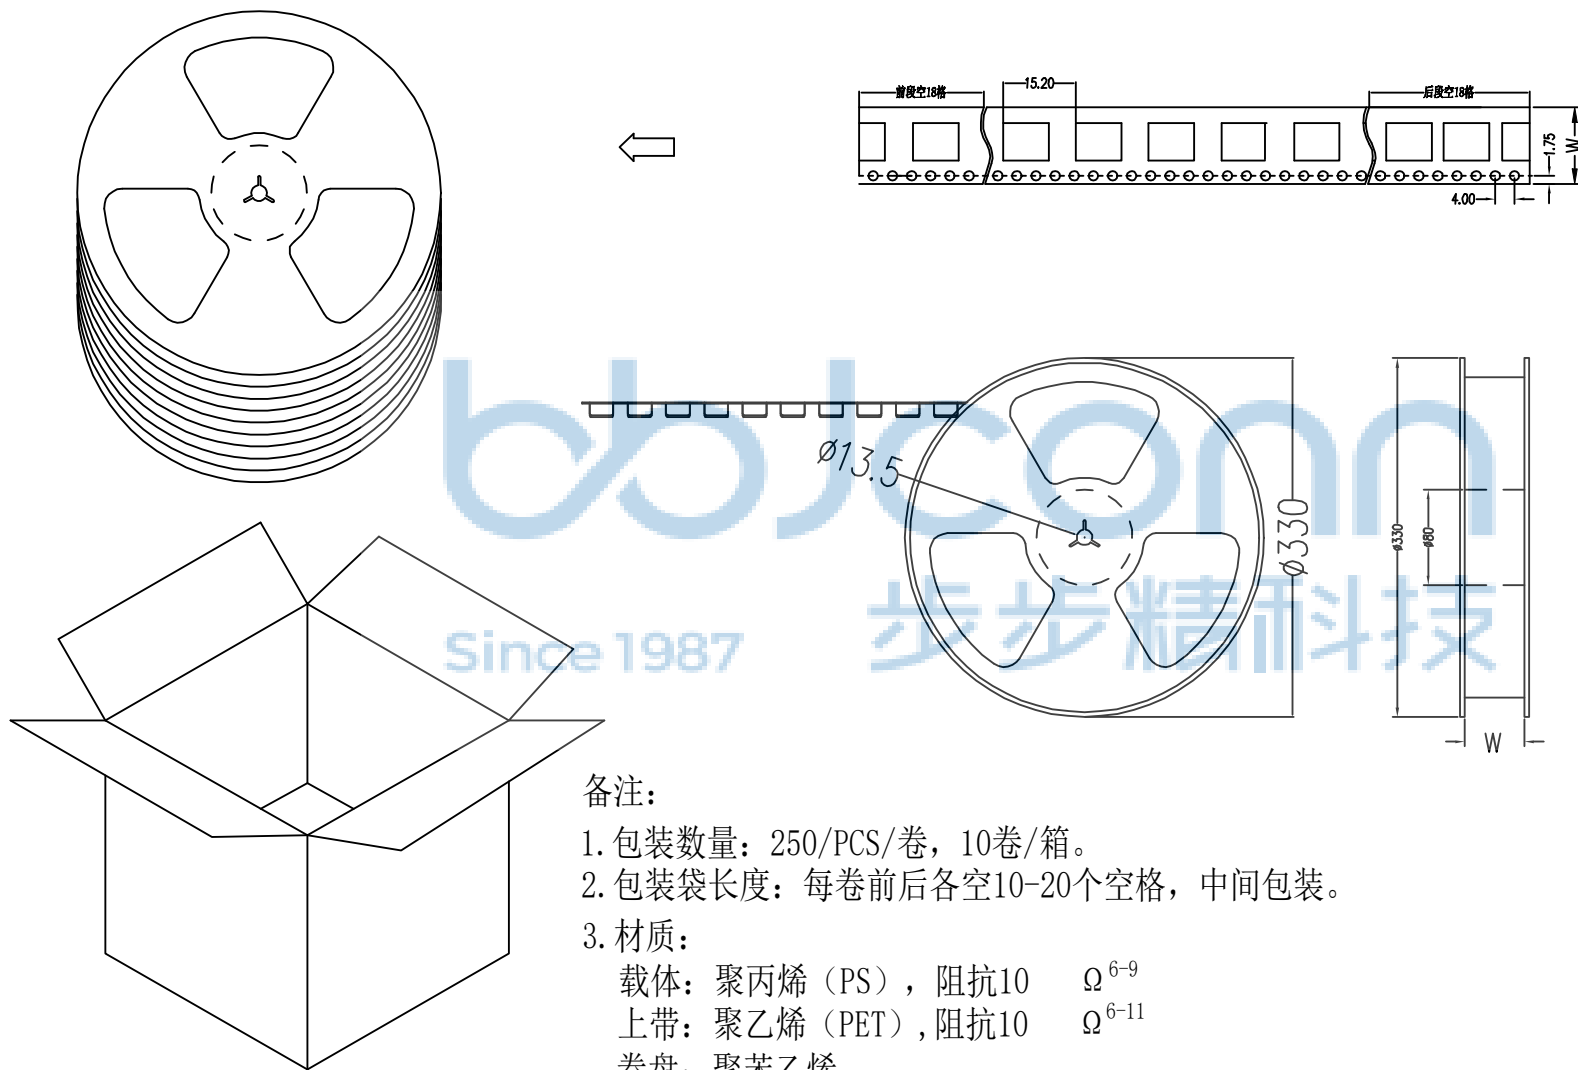

备注:

1. 包装数量: 250/PCS/卷, 10卷/箱。
2. 包装袋长度: 每卷前后各空10-20个空格, 中间包装。
3. 材质:
载体: 聚丙烯 (PS), 阻抗10 Ω^{6-9}
上带: 聚乙烯 (PET), 阻抗10 Ω^{6-11}
卷盘: 聚苯乙烯。

纸箱规格: 345*345*230MM

纸箱规格: 345*345*350MM



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司	
.X: ±0.38 .XX: ±0.25 .XXX: ±0.13		X*: ±3" X*: ±2" .XX*: ±1"	
APPD.	JM_Zheng	NAME: USB 3.1 AF 90度 外壳四脚DIP 端子DIP 侧插 L=25.70 H=13.8 脚距10.70 平口 不锈钢外壳 镀金足1u 编带	
CHKD.	LYX	P.J. NO.: 127-272-090011-P2G	
DR.	SGF	SIZE: A4 DRW NO.:	
PDWG.NO: 0536-1		FINISH: SEE NOTES MAT'L: SEE NOTES	
		SCALE: N/A REV.: A0 UNIT: mm PAGE: 2/2	