



NOTE:

- 1. MATERIAL:
 - 1.1 INSULATOR: HIGH TEMPERATURE PLASTIC UL 94 V-0;BLACK (PA9T)
 - 1.2 CONTACT: C2680
 - 1.3 SHELL:SUS 304
- 2. ELECTRICAL CHARACTERISTICS:
 - 2.1 CONTACTRESISTANCE:30mΩ MAX
 - 2.2 CONTACT CURRENT RATING:1.8A (PIN 1,4) ; OTHER CONTACTS 0.25A
 - 2.3 DIELECTRIC WITHSTANDING VOLTAGE:500 V R.M.S.
 - 2.4 INSULATION RESISTANCE 100 MΩ MIN
 - 2.5 OPERATING TEMPERATURE:-40° C ~ 85° C
- 3 MECHANICAL CHARACTERISTICS:
 - 3.1 MATING FORCE:3.57 kgf MAX.
 - 3.2 REMOVAL FORCE: 1.0 kgf Min
 - 3.3 DURABILITY:MANDATORY:5,000 CYCLES
 - 3.4. SALT SPRAY 48HR PASS.
- 4.1 TERMINAL:
 - 50u" MIN NICKEL (CONTACT AREA)100u"MIN Tin ON SOLDER AREA (1~30)u"Au ON CONTACT AREA
- 4.2 SHELL:60u"MIN. NICKEL



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION. PDWG.NO: 0536-1			深圳市步步精科技有限公司		
	.X: ±0.38 .XX: ±0.25 .XXX: ±0.13		X*: ±3* .X*: ±2* .XX*: ±1*		
	NAME:	USB 3.1 AF 90度 外壳四脚DIP 端子DIP 反向沉板6.08 L=16.90 CH=2.92 脚距15.4 平口 不锈钢外壳 镀金足1u 编带			
		PJ. NO.: 127-272-090014-P2G SIZE: A4 DRW NO.:			
	FINISH: SEE NOTES		MAT'L: SEE NOTES		
SCALE: N/A		REV.: A0		UNIT: mm	PAGE: 1/2

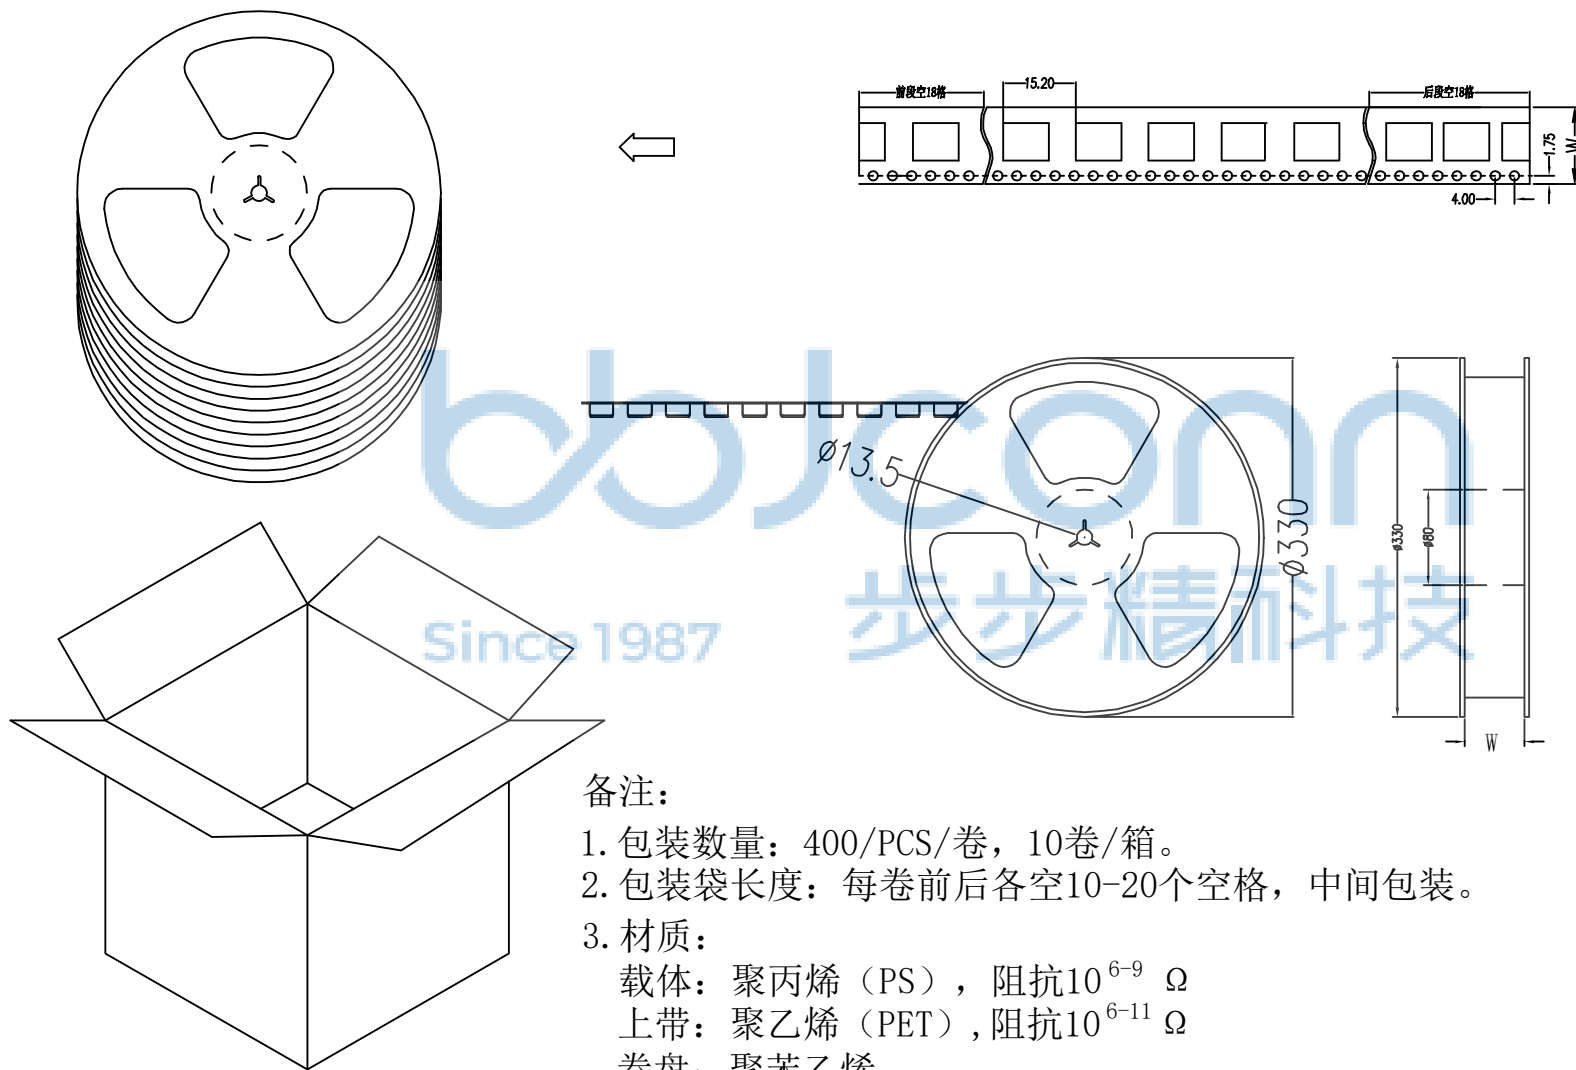

备注:

1. 包装数量: 400/PCS/卷, 10卷/箱。
2. 包装袋长度: 每卷前后各空10-20个空格, 中间包装。
3. 材质:
载体: 聚丙烯 (PS), 阻抗 $10^{6-9} \Omega$
上带: 聚乙烯 (PET), 阻抗 $10^{6-11} \Omega$
卷盘: 聚苯乙烯。

纸箱规格: 345*345*230MM

纸箱规格: 345*345*350MM

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司	
PDWG,NO: 0536-1		NAME: USB 3.1 AF 90度 外壳四脚DIP 端子DIP 反向沉板6.08 L=16.90 CH=2.92 脚距15.4 平口 不锈钢外壳 镀金足1u 编带	
APPD. JM_Zheng		P.J. NO.: 127-272-090014-P2G	
CHKD. LYX		SIZE: A4DRW NO.:	
DR. SGF		FINISH: SEE NOTES MAT'L: SEE NOTES	
		SCALE: N/A REV.: A0 UNIT: mm PAGE: 2/2	