

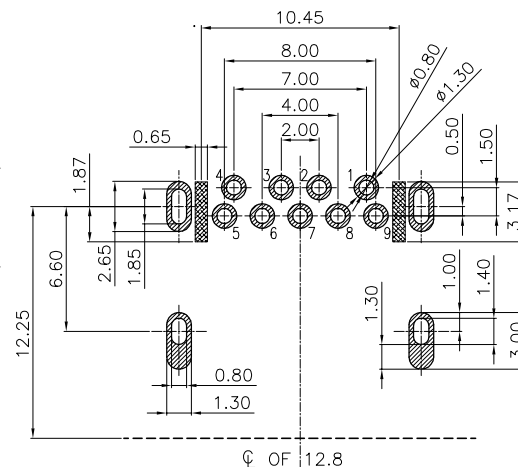
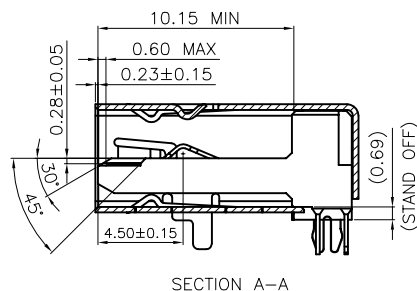
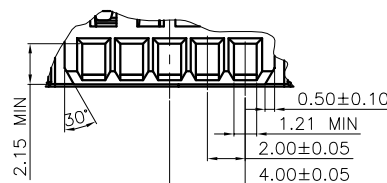


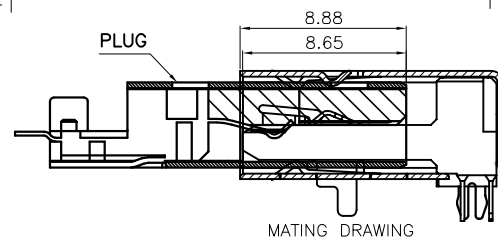


RECOMMEND P.C.B LAYOUT(THK:1.60mm)

TOLERANCE: ± 0.03

 STANDOFF AREA

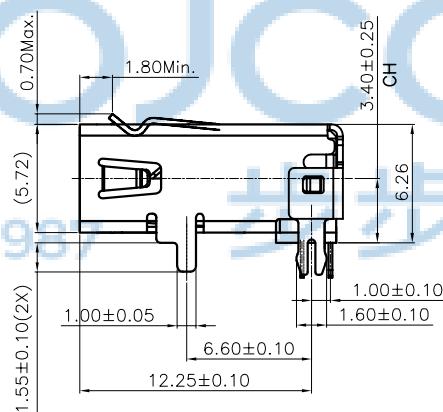

SECTION B-B




4.SALT SPRAY 48HR PASS.




CONTACTS: GOLD
CONTACTS PLATING THICKNESS: 30U" & G/F
SOLDERING PLATING: MATTE-TIN
SHELL PLATING: NICKEL

FINISH. SEE NOTES		MAT L.. SEE NOTES	
CONT. N/A	FEED. 00	WHT. 00	FACE. 00

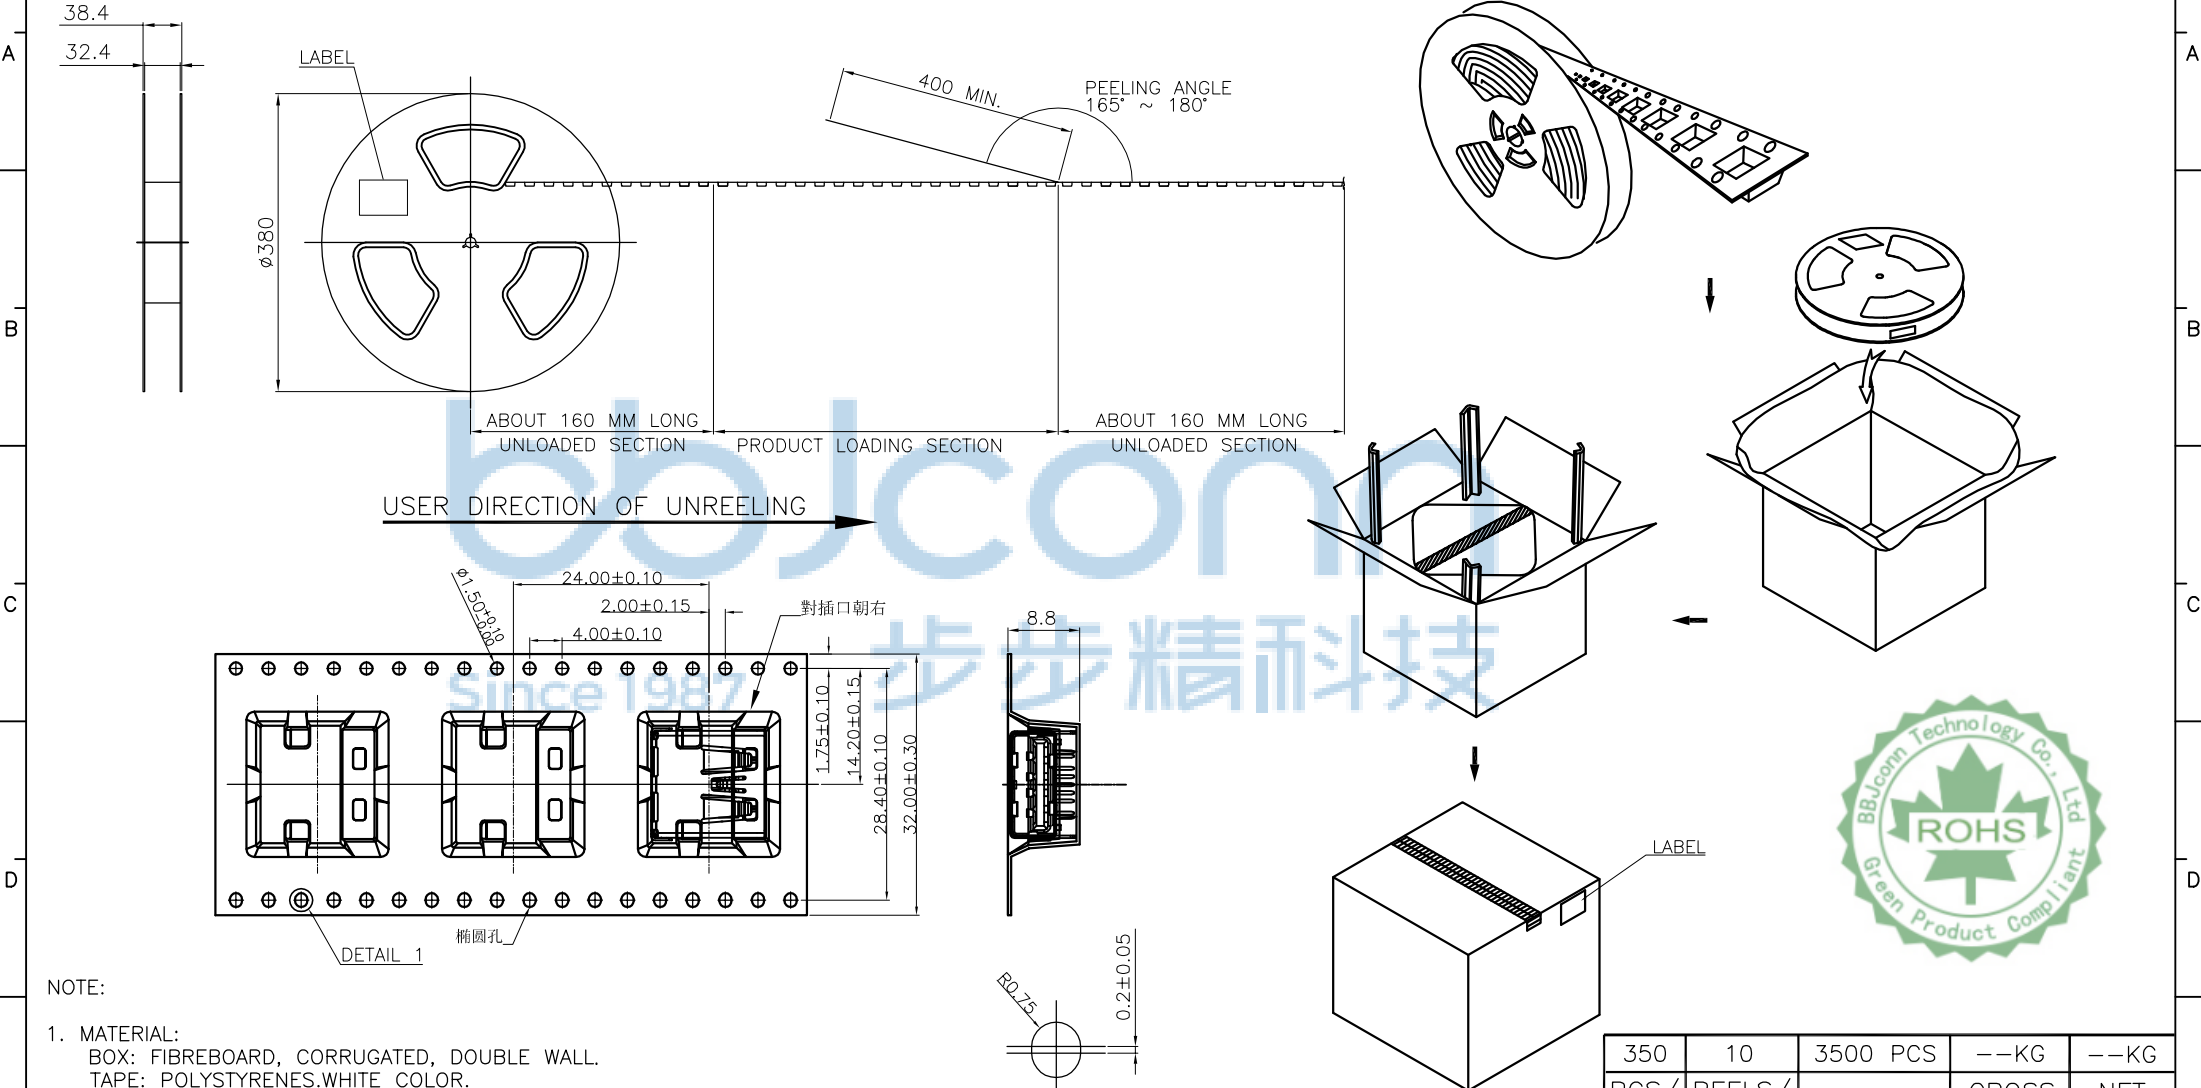

NOTE:

- MATERIAL:
BOX: FIBREBOARD, CORRUGATED, DOUBLE WALL.
TAPE: POLYSTYRENES, WHITE COLOR.
REEL: POLYSTYRENES, BLUE COLOR.
BAG: POLYETHYLENE.
- PEELING STRENGTH: 0.1 ~ 1.5 N (10 ~ 150 GRAMS)
- PEELING SPEED: 300 mm/min.
- EACH BAG SHALL BE INCLUDED DESICCANT.



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION. PDWG.NO: 0957-1		深圳市步步精科技有限公司				
		.X: ±0.38 .XX: ±0.25 .XXX: ±0.13		.X*: ±3* .X*: ±2* .XX*: ±1*		
		NAME: USB 3.1 Gen1 5G AF 90度 反向 四脚DIP 后鱼叉脚 端子DIP L=13.9 CH=3.4 平口 PA9T蓝胶 不锈钢外壳 编带				
		PJ. NO.: 127-272-090005-J8G SIZE: A4 DRW NO.:				
APPD.	JM_Zheng		FINISH: SEE NOTES		MAT'L.: SEE NOTES	
CHKD.	LYX		SCALE: N/A		REV.: A0	
DR.		SGF	UNIT: mm		PAGE: 2/2	



350	10	3500 PCS	--KG	--KG
PCS/REEL	REELS/CARTON	QUANTITY	GROSS WEIGHT	NET WEIGHT