





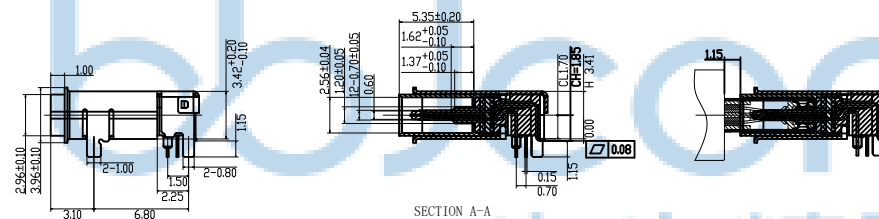



4.3 INNER SHELL: DEGREASE



建议防水圈规格（材质硅橡胶）

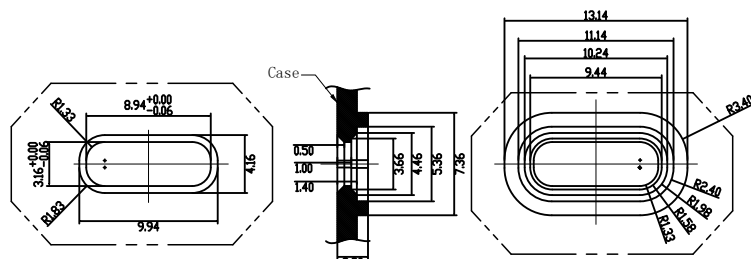

Assembly direction

USB TYPE-C PIN ASSIGNMENTS

PIN NUMBER	A1	A2	A3	A4	A5	A6	A7	A8	A9	A10	A11	A12
SIGNAL NAME	GND	SSTXp1	SSTXn1	V _{BUS}	CC1	Dp1	Dn1	SBU1	V _{BUS}	SSRXn2	SSRXp2	GND
PIN NUMBER	B12	B11	B10	B9	B8	B7	B6	B5	B4	B3	B2	B1
SIGNAL NAME	GND	SSRXp1	SSRXn1	V _{BUS}	SBU2	Dn2	Dp2	CC2	V _{BUS}	SSTXn2	SSTXp2	GND

--	--



深圳市步步精科技有限公司

.X: ± 0.38	X*: ± 3
.XX: ± 0.25	.X*: ± 2
.XXX: ± 0.13	.XX*: ± 1

APPD JM_Zheng

CHKD	LYX
------	-----

DR

±0.38	X: ±3°	NAME: TYPE-C 24P 防水母座 L=10.65 CH=1.85 板上四脚插 带柱 带后盖 端子DIP+SMT IPX7
±0.25	.X: ±2°	
±0.13	XX: ±1°	




PJ NO:	126-223-240001-H8G
--------	--------------------

SIZE:A4	DRW NO:
---------	---------

EE NOTES	MAT'L :SFF NOTES
----------	------------------

/A	REV: A0	UNIT: mm	PAGE: 1 / 2
----	---------	----------	-------------

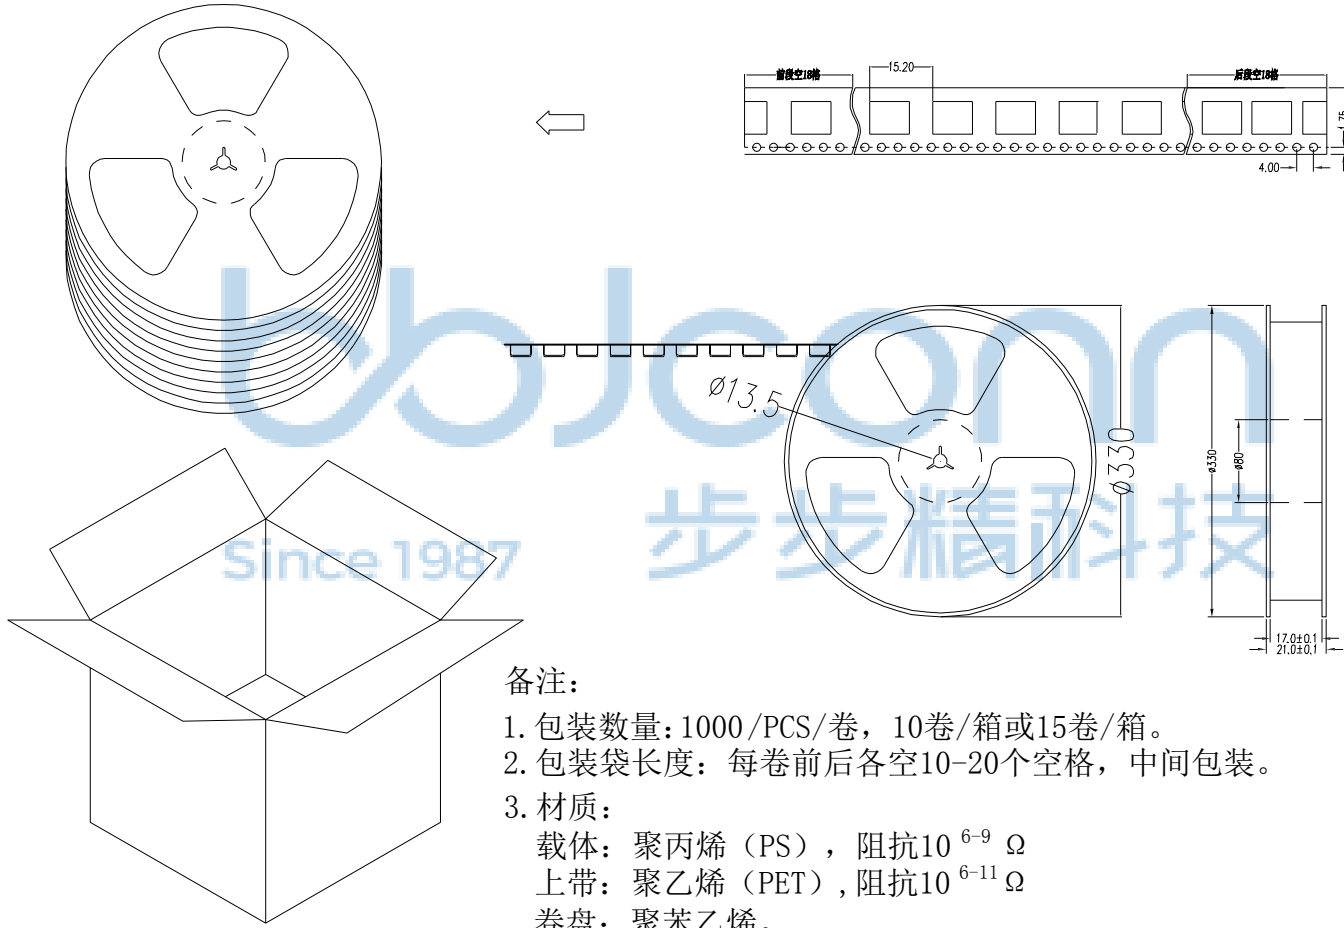

备注:

1. 包装数量: 1000 /PCS/ 卷, 10卷/箱或15卷/箱。
2. 包装袋长度: 每卷前后各空10-20个空格, 中间包装。
3. 材质:
载体: 聚丙烯 (PS) , 阻抗 $10^{6-9} \Omega$
上带: 聚乙烯 (PET) , 阻抗 $10^{6-11} \Omega$
卷盘: 聚苯乙烯。

纸箱规格: 345*345*23MM
纸箱规格: 345*345*35MM



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司		NAME: TYPE-C 24P 防水母座 L=10.65 CH=1.85 板上四脚插 带柱 带后盖 端子DIP+SMT IPX7	
				PJ NO: 126-223-240001-H8G	
APPD	JM_Zheng	SIZE:A4		DRW NO:	
CHKD	LYX	FINISH:SEE NOTES		MAT'L:SEE NOTES	
PDWG NO: 0482-1	DR	TSP	SCALE:N/A	REV: A0	UNIT:mm PAGE: 2/2