
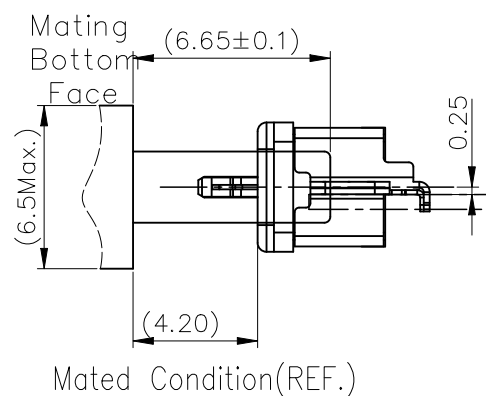
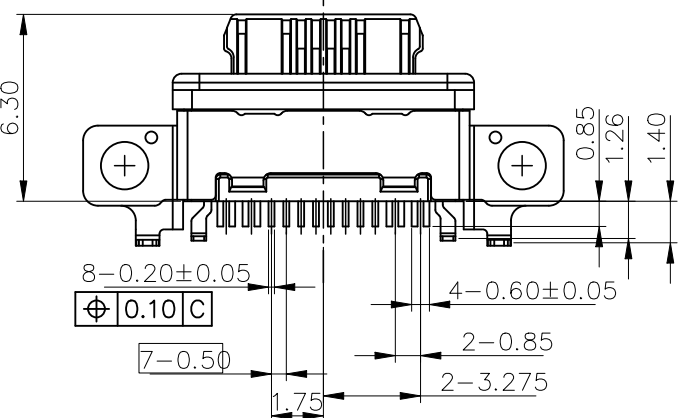
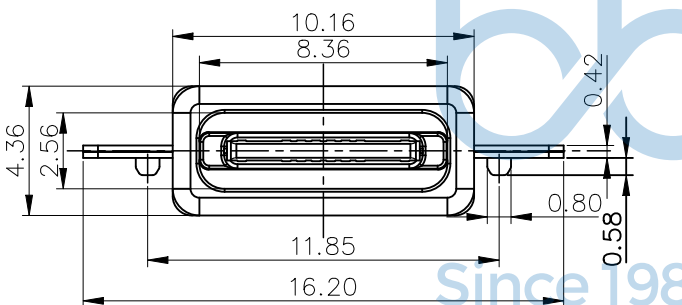


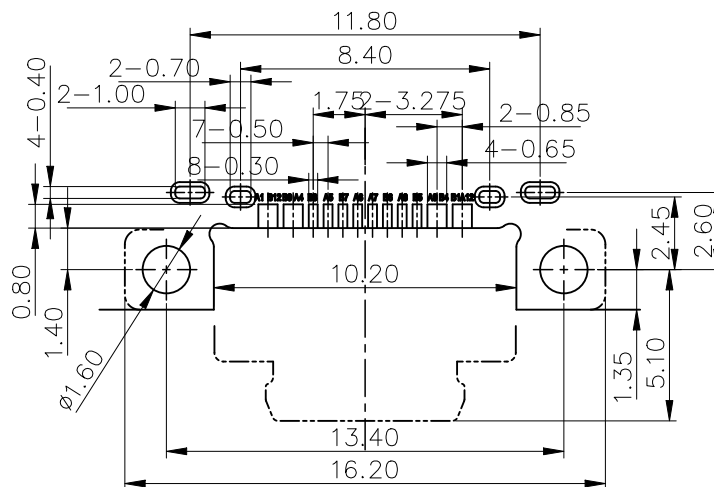

NOTES:

SPECIFICATION:

1. CURRENT RATING: 3.0A MAX
2. VOLTAGE: 100 VAC
3. TEMPERATURE RANGE: -30 °C ~ 85 °C
4. CONTACT RESISTANCE: 40 MILLIONHM MAX
5. INSULATION RESISTANCE: 100 MEGOHMS MIN.
6. INSERTION FORCE : 5N~20N
7. UNMATING FORCE: 8N~20N
8. DURABILITY: 10,000 CYCLES

Pin Assignments

Pin Assignments		Pin Assignments	
Contact Number	Signal Name	Contact Number	Signal Name
A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	Dp1	B7	Dn2
A7	Dn1	B6	Dp2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN ANY

NOT BE USED IN WHOLE
OR IN PART WITHOUT
PRIOR WRITTEN PERMISSION.

PDWG,NO: 0523-1

	.X
	.XX
	.XXX

APPD.	JM_Zheng
CHKD.	LYX
DR.	TSP

深圳市步步精科技有限公司


NAME: TYPE-C 16P 防水母座 锁板式 沉板1.93
SMT L=5.80 CH=0.25 舌片外露2.0 IP68

	PJ. NO.: UC.01.31-1W-0005
---	---------------------------

SIZE: A4 | DRW NO.:

FINISH: SEE NOTES	MAT'L.: SEE NOTES
-------------------	-------------------

SCALE: N/A	REV.: A0	UNIT: mm	PAGE: 1 / 1
------------	----------	----------	-------------

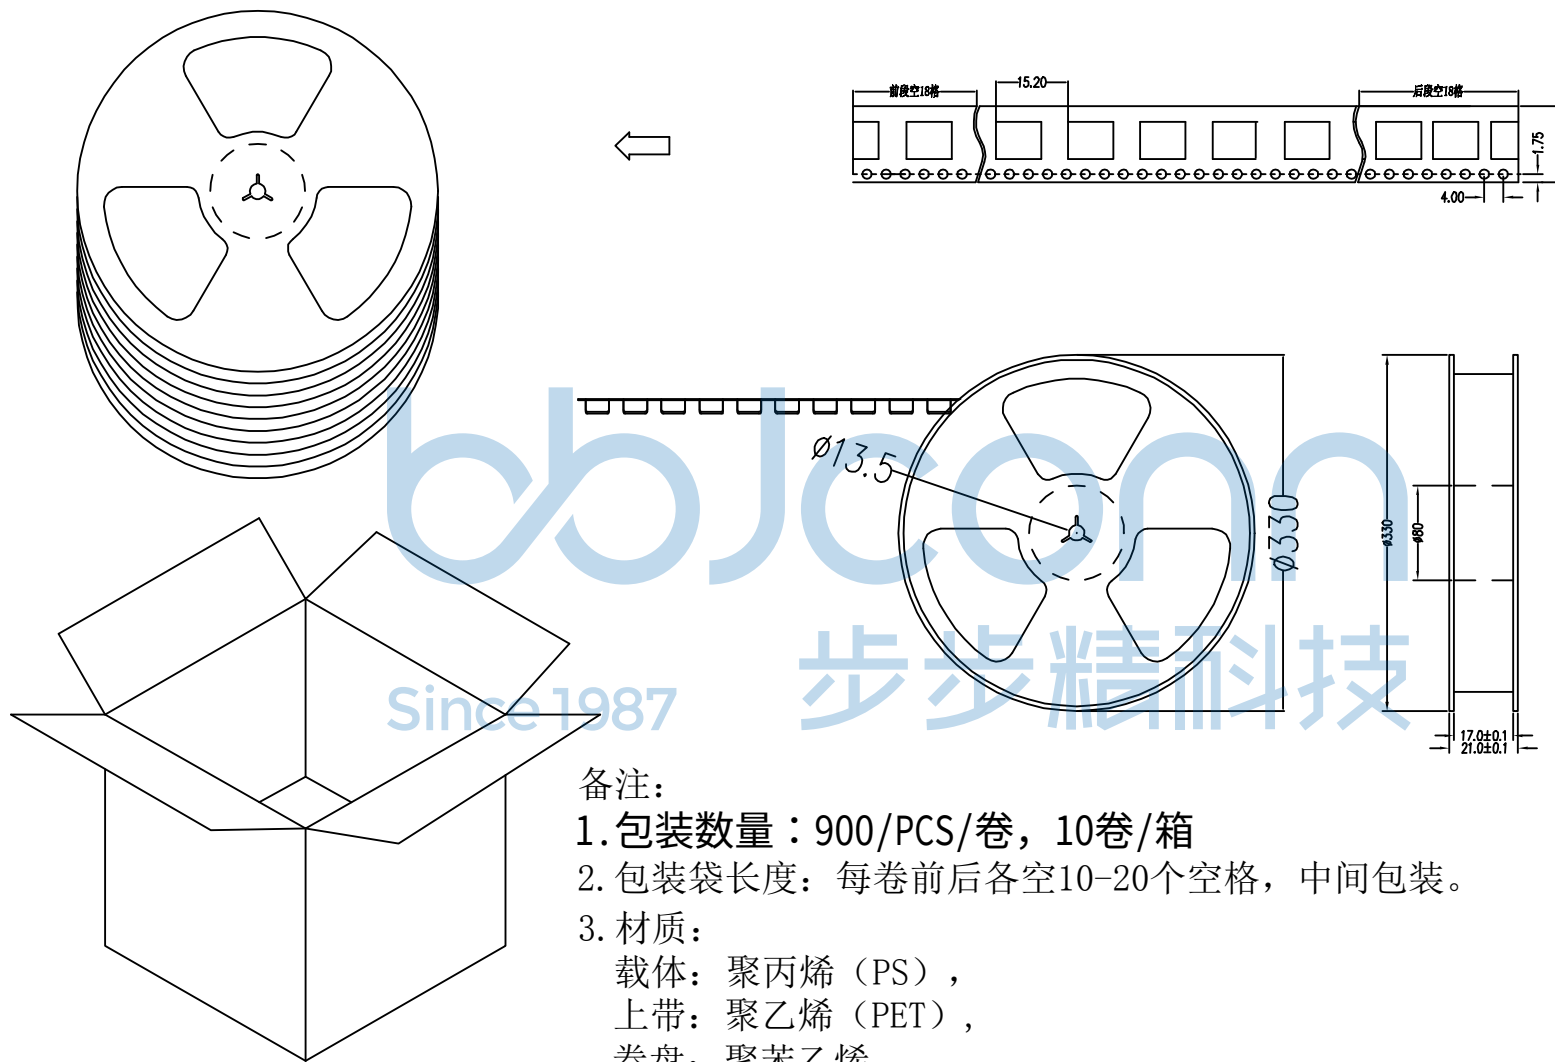

- 备注:
1. 包装数量：900/PCS/卷，10卷/箱
 2. 包装袋长度：每卷前后各空10-20个空格，中间包装。
 3. 材质：
载体：聚丙烯（PS），
上带：聚乙烯（PET），
卷盘：聚苯乙烯。

纸箱规格：345*345*23MM
纸箱规格：345*345*35MM

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		 深圳市步步精科技有限公司	
.X: ±0.38	X": ±3"	NAME: TYPE-C 16P 防水母座 锁板式 沉板1.93	
.XX: ±0.25	.X": ±2"	SMT L=5.80 CH=0.25 舌片外露2.0 IP68	
.XXX: ±0.13	.XX": ±1"		
APPD.	JM_Zheng	PJ. NO.: UC.01.31-1W-0005	
CHKD.	LYX	SIZE: A4 DRW NO.:	
PDWG.NO:	0523-1	FINISH: SEE NOTES MAT'L.: SEE NOTES	
DR.	TSP	SCALE: N/A REV.: A0 UNIT: mm PAGE: 2/2	