






REV.	ECN NO	CONTENT	DATE	ENGINEER
A0		Initial release	/	GZY

备注 (NOTE):

- 电气特性:
 - 接触区: 接触电阻40mΩ Max, 允许10mΩ变化量. 测试条件: 20mv, 100mA下测量.
 - 接触电流: 3A VBUS引脚; 1.25A用于GND引脚; 其他引脚为0.25A.
 - 额定电压: 30V.
 - 耐电压: 100VR. M. S.
 - 绝缘电阻: 至少100兆欧.
- 机械性能:
 - 插入力: 0.51-2.04Kg
 - 拔出力: 0.82-2.04Kg
 - 耐久性: 0.61-2.04Kg
 - 插拔次数: 10000次.
 - 可焊性: 温度210-230℃, 时间10秒.
 - 工作环境: -20℃ to +85℃.

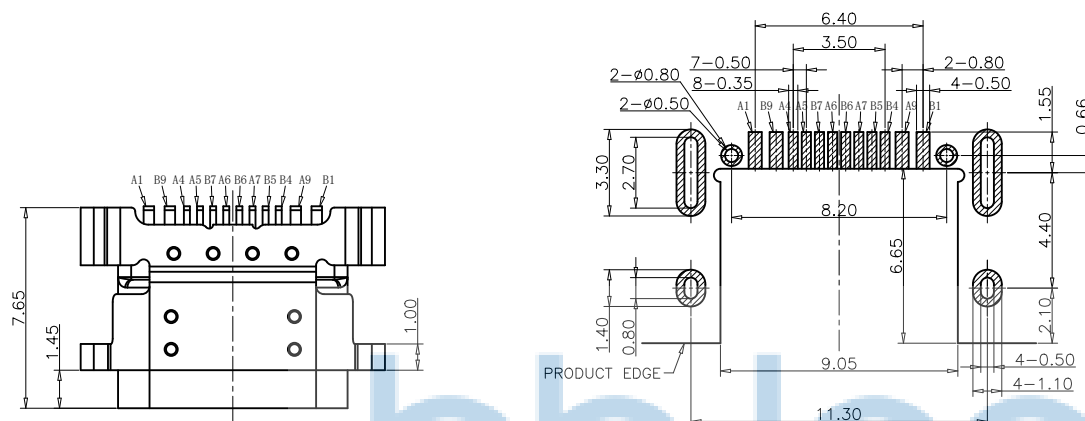

RECOMMEND P.C.B LAYOUT (COMPONENT SIDE)
TOLERANCE FOR PCB LAYOUT IS ±0.05

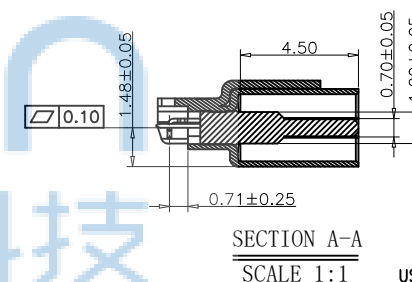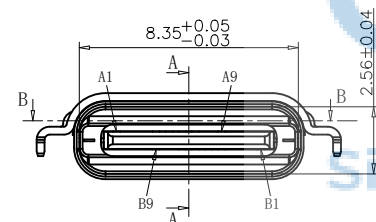

SECTION A-A
SCALE 1:1

USB TYPE C PIN ASSIGNMENTS

PIN NUMBER	SIGNAL NAME	PIN NUMBER	SIGNAL NAME
A1	GND	B9	VBUS
A4	VBUS		
A5	CC1		
A6	Dp1	B7	Dn2
A7	Dn1	B6	Dp2
		B5	CC2
A9	VBUS	B4	VBUS
		B1	GND

TABLE:

NO	PART	Q'TY	Material
1	SHELL-1	1	STAINLESS STEEL, Ni PLATED 30u"Min
2	SHELL-2	1	STAINLESS STEEL, Ni PLATED 30u"Min
3	CONTACT	12	COPPER STEEL, Ni 50u"Min; Au u"
4	MID PLATE	1	STAINLESS STEEL, NO PLATING
5	MD HOUSING	1	HIGH TEMPERATURE RESISTANT PLASTIC BLACK UL94 V-0


THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co., Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
OR IN PART WITHOUT
PRIOR WRITTEN PERMISSION.
PDWG, NO: 0395-1

.X: ±0.38 .X': ±3" .XX: ±0.25 .X'': ±2" .XXX: ±0.13 .X'': ±1"		NAME: TYPE-C 12P 防水母座 端子SMT 四脚插 沉板1.50 拉伸壳 带柱 L=7.65 不锈钢外壳 带中夹片 IPX7 充电数据版 编带	
APPD.	JM_Zheng	PJ. NO.: 126-221-120001-J2G	SIZE: A4 DRW NO.:
CHKD.	LYX		
DR.	GZY	FINISH: SEE NOTES	MAT'L.: SEE NOTES
		SCALE: N/A	REV.: A0 UNIT: mm PAGE: 1/2





REV.	ECN NO	CONTENT	DATE	ENGINEER
A0		Initial release	/	GZY

REEL OFF SECTION (12 POCKETS) 1200PCS PULL OUT DIRECTION (12 POCKETS)

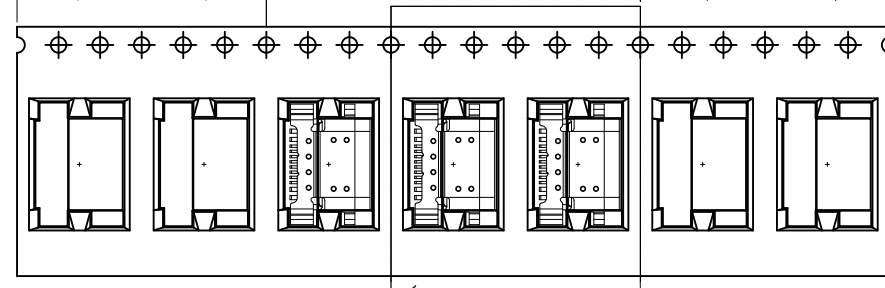


SEE DETAIL X

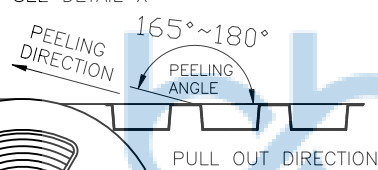



LABEL

W+0.5

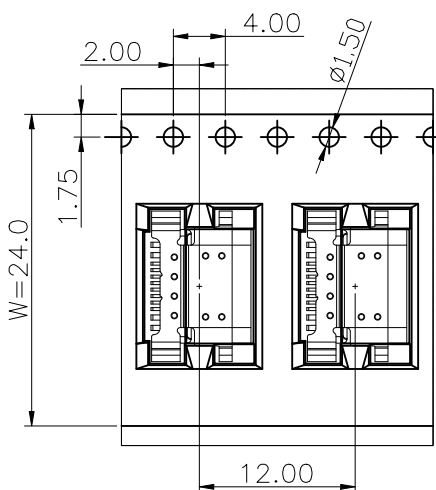

REEL OFF DIRECTION

PULL OUT DIRECTION

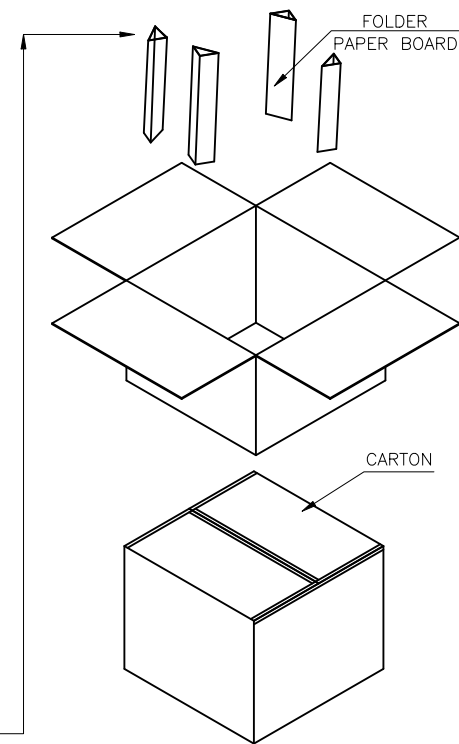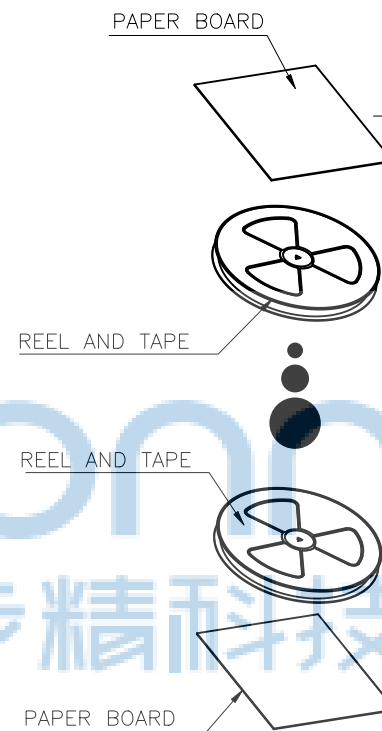

	REEL	CARTON
CONNECTOR (PCS)	1200	12000

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co., Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.				深圳市步步精科技有限公司			
.X: ±0.38	X': ±3"	NAME: TYPE-C 12P 防水母座 端子SMT 四脚插 沉板1.50 拉伸壳 带柱 L=7.65 不锈钢外壳 带中夹片 IPX7 充电数据版 编带		PJ. NO.: 126-221-120001-J2G			
.XX: ±0.25	.X': ±2"						
.XXX: ±0.13	.XX': ±1"						
APPD.	JM_Zheng	SIZE: A4		DRW NO.:			
CHKD.	LYX						
PDWG.NO: 0395-1	DR.	GZY	FINISH: SEE NOTES	MAT'L.: SEE NOTES		SCALE: N/A	REV.: A0
				UNIT: mm	PAGE: 2/2		