
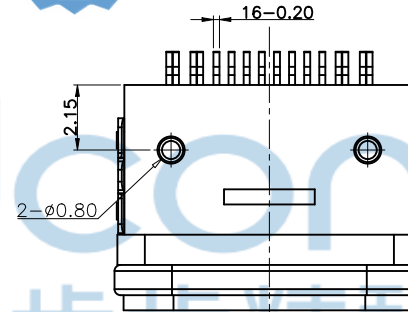
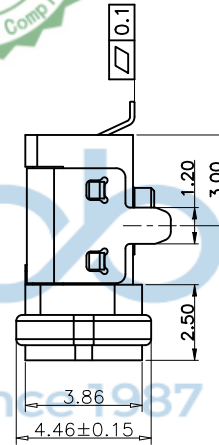


NOTES:

SPECIFICATION:

- 1.CURRENT RATING: 5A
- 2.VOLTAGE RATING: 20V
- 3.VBUS & GND PINS AND OTHER PINS: 40mΩ/PIN MAX
SHIELD: 50mΩ/MAX
LLCR MAX. CHANGE OF ALL PINS: 10Ωm
- 4.INSULATION RESISTANCE: 100MΩ MIN
- 5.DIELECTRIC WITHSTAND VOLTAGE,AC 100V FOR 1MINUTE
- 6.INSERTION FORCE: 0.5~2.0kgf
- 7.UNMATING FORCE: 0.8-2.0kgf
- 8.DURABILITY: 10000 CYCLES
- 9.OPERATING TEMPERATURE: -35°C~+85°C
- 10.THE PEAK TEMPERATURE ON THE BOARD SHALL BE MAINTAINED FOR 10 SECONDS AT 210-230°C
- 11.WATERPROOF:IP-X7.


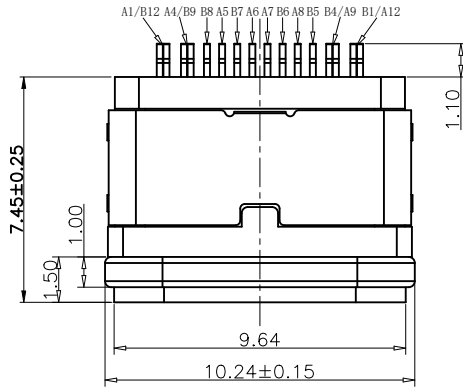


USB TYPE C PIN ASSIGNMENTS

PIN NUMBER	SIGNAL NAME	PIN NUMBER	SIGNAL NAME
A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND

TABLE:

NO	PART	Q'TY	Material
1	PLASTIC SHELL	1	PA9T UL94 V-0 BLACK
2	CONTACT	16	C2680,TIN80u"/Au3u"/Ni30u"PLATED
3	MID PLATE	1	SUS301,NO PLATING
4	HOUSING	1	LCP UL94 V-0 BLACK
5	SHIELDING PLATE	1	SUS,NI PLATED
6	WATERPROOF RING	1	SILICONE UL94 V-0 RED

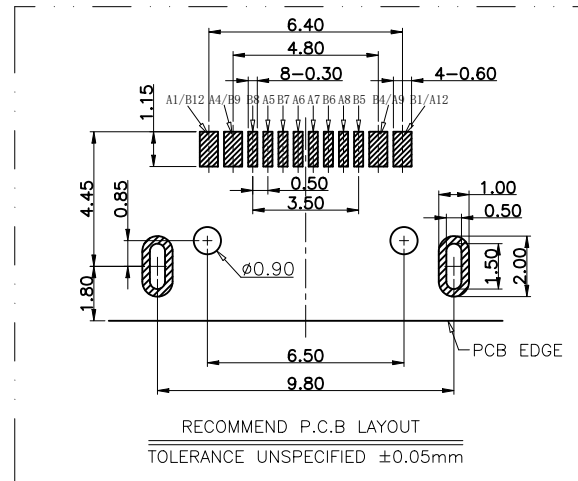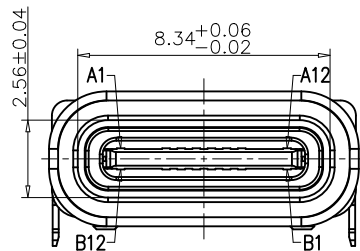

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
OR IN PART WITHOUT
PRIOR WRITTEN PERMISSION.
PDWG.NO: 0395-1



深圳市步步精科技有限公司

.X: ±0.38 X': ±3'
.XX: ±0.25 X'': ±2'
.XXX: ±0.13 .XX': ±1'

NAME: TYPE C 16P 母座 板上型 L=7.45
两脚插 带柱 端子SMT 防水IPX7 方形 (U型全塑款) 编带

APPD. JM_Zheng


PJ. NO.: 126-221-160001-J2G

CHKD. LYX


SIZE: A4 DRW NO.:

DR. ZY


FINISH: SEE NOTES MAT'L: SEE NOTES
SCALE: N/A REV.: A0 UNIT: mm PAGE: 1/3

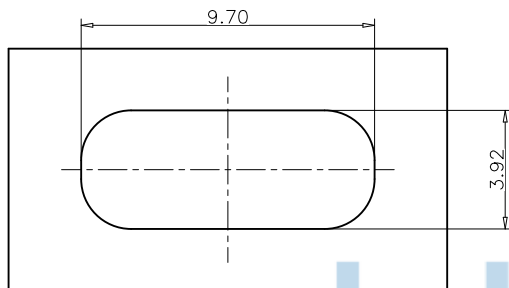


密封开孔参考尺寸(只供参考)
组装外壳时需要打环保润滑油

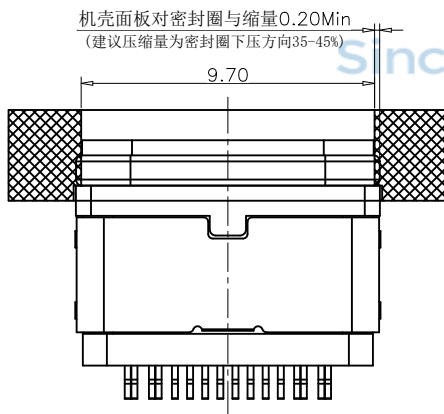



机壳面板对密封圈与缩量0.20Min
(建议压缩量为密封圈下压方向35~45%)

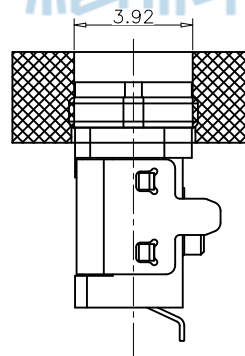



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司		NAME: TYPE C 16P 母座 板上型 L=7.45 两脚插 带柱 端子SMT 防水IPX7 方形 (U型全塑款) 编带	
				P.J. NO.: 126-221-160001-J2G	
PDWG.NO: 0395-1		APPD. JM_Zheng		SIZE: A4 DRW NO.:	
		CHKD. LYX		FINISH: SEE NOTES	
		DR. ZY		MAT'L.: SEE NOTES	
				SCALE: N/A	
				REV.: A0	
				UNIT: mm	
				PAGE: 2/3	

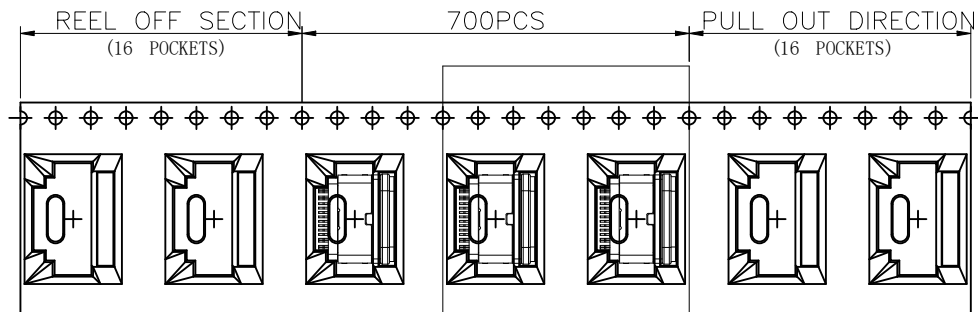

SEE DETAIL X

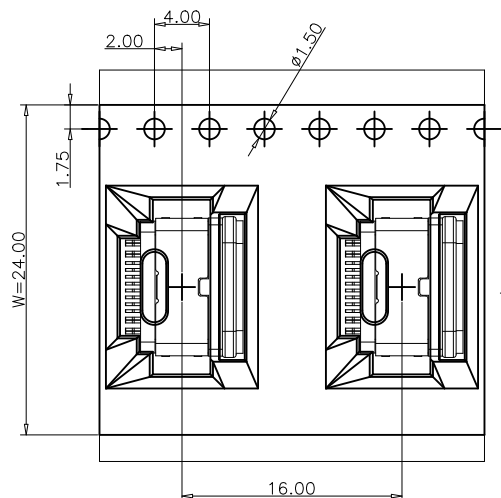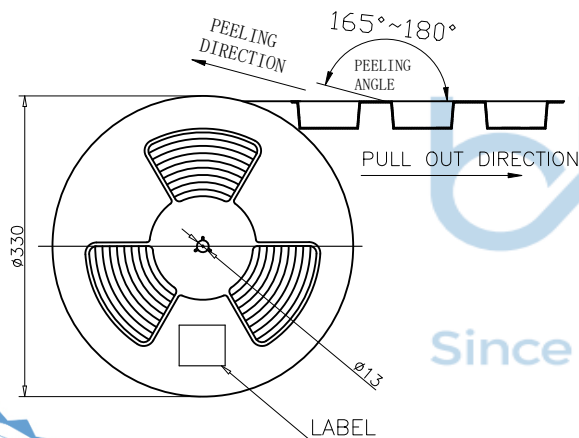

PULL OUT DIRECTION

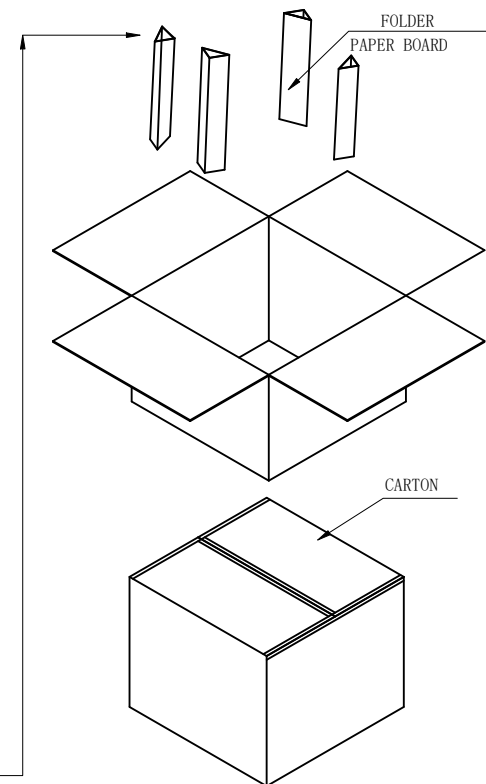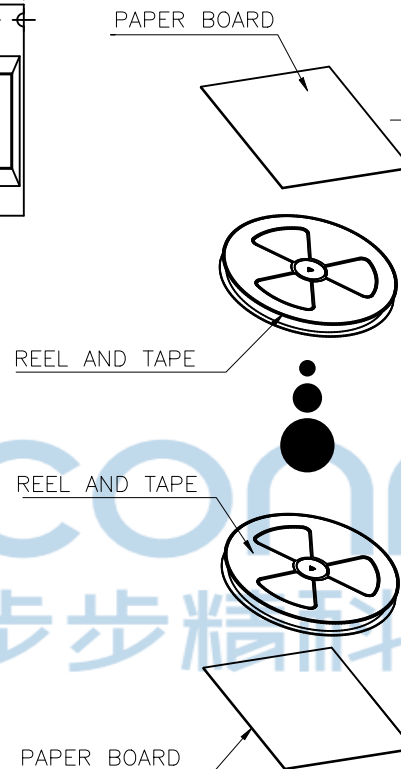

	REEL	CARTON
CONNECTOR (PCS)	700	7000

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		PDWG.NO: 0395-1		深圳市步步精科技有限公司	
.X: ±0.38	X': ±3'	NAME: TYPE C 16P 母座 板上型 L=7.45 两脚插 带柱 端子SMT 防水IPX7 方形 (U型全塑款) 编带		PJ. NO.: 126-221-160001-J2G	
.XX: ±0.25	X': ±2'	APPD. JM_Zheng		SIZE: A4 DRW NO.:	
.XXX: ±0.13	.XX': ±1'	CHKD. LYX		FINISH: SEE NOTES MAT'L: SEE NOTES	
DR. ZY		SCALE: N/A REV.: A0		UNIT: mm PAGE: 3/3	