
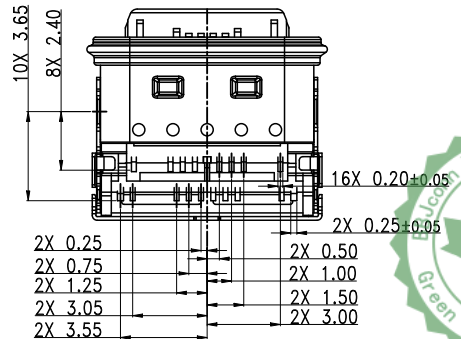

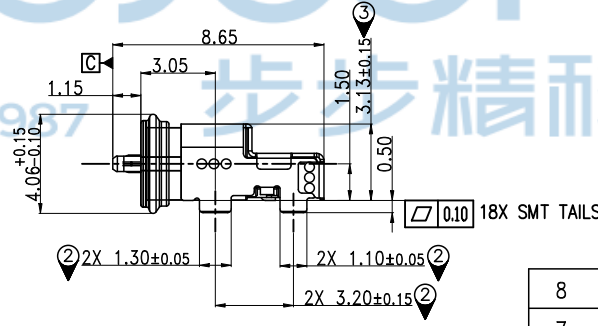
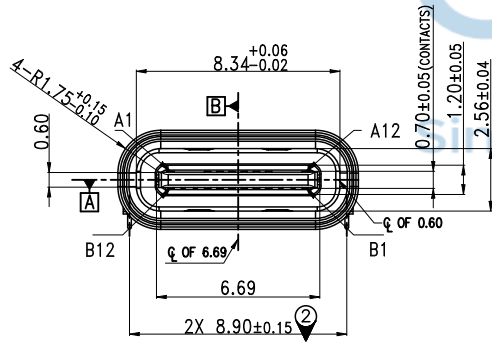



REV.	ECN NO	CONTENT	DATE	ENGINEER
A0		Initial release		LYX

NOTES/注释:

- MATERIAL/材料: SEE TABLE/见下表
- GENERAL SPECIFICATION/通用特性:
 - COPLANARITY /共面度: 0.10 Max.
 - CURRENT RATING: 5A / 额定电流: 5安培
 - CONTACT RESISTANCE: 40mΩ MAX (INITIAL).
INSULATION RESISTANCE: 100MΩ Min
接触电阻: 40毫欧最大(初始值) / 绝缘电阻: 100MΩ Min
 - DIELECTRIC WITHSTANDING VOLTAGE: 100 VAC
耐电压: 100伏交流
 - MECHANICAL CHARACTERISTICS:
INSERTION FORCE: 5~20N EXTRACTION FORCE: 8~20N
AFTER DURABILITY EXTRACTION FORCE: 6~20N
力学特性: 初始插入力: 5~20N 拔出力: 8~20N
耐久后拔出力: 6~20N
 - DURABILITY: 10000 CYCLES / 耐久性: 10000次
 - PACKAGING TYPE: CARRIER TAPE./ 包装类型: 载带包装
- WATERPROOF CLASS IPX8/防水等级 IPX8
- DIMENSIONING SHALL BE INTERPRETED PER ASME Y14.5M 1994.
尺寸标注基于ASME Y14.5M 1994标准规范

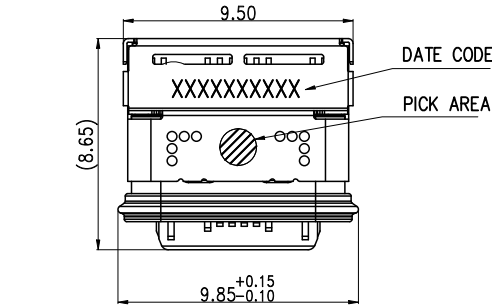

Pin No	Signal Name	Mating Sequence	Pin No	Signal Name	Mating Sequence
A1	GND	First	B12	GND	First
A4	Vbus	First	B9	Vbus	First
A5	CC1	Second	B8	SBU2	Second
A6	D+	Second	B7	D-	Second
A7	D-	Second	B6	D+	Second
A8	SBU1	Second	B5	CC2	Second
A9	Vbus	First	B4	Vbus	First
A12	GND	First	B1	GND	First
	SHELL	GND		SHELL	GND






8	LIM	1	CHN-LIMS-60-A/B	BLACK
7	SMALL SHELL	1	SUS304	NICKEL: 30U" MIN
6	MAIN SHELL	1	SUS304	NICKEL: 30U" MIN
5	OUTOR SHELL	1	SUS304	NICKEL: 30U" MIN
4	MID PLATE	1	SUS301	NICKEL: 30U" MIN
3	BOTTOM TERMINAL	1	C1814	MATING AREA: Au1u" MIN, 30u" NICKEL OVERALL
2	TOP TERMINAL	1	C1814	MATING AREA: Au1u" MIN, 30u" NICKEL OVERALL
1	MOLDING HOUSING	1	PA10T	BLACK
ITEM	DESCRIPTION	Q'TY	MATERIAL	

BILL OF MATERIAL

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co., Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
OR IN PART WITHOUT
PRIOR WRITTEN PERMISSION.
PDWG. NO: 0869-2

深圳市步步精科技有限公司			
.X: ±0.38 .XX: ±0.25 .XXX: ±0.13		X*: ±3" .X*: ±2" .XX*: ±1"	
NAME: TYPE-C 16P 防水母座 板上四脚插 端子双排SMT L=7.50 CH=1.5 舌片外漏1.15 IPX8		PJ. NO.: 126-221-160001-M2G	
APPD. JM_Zheng		SIZE: A4 DRW NO.:	
CHKD. TSP		FINISH: SEE NOTES MAT'L.: SEE NOTES	
DR. LYX		SCALE: N/A REV.: A0 UNIT: mm PAGE: 1/2	

REV.	ECN NO	CONTENT	DATE	ENGINEER
A0		Initial release		LYX

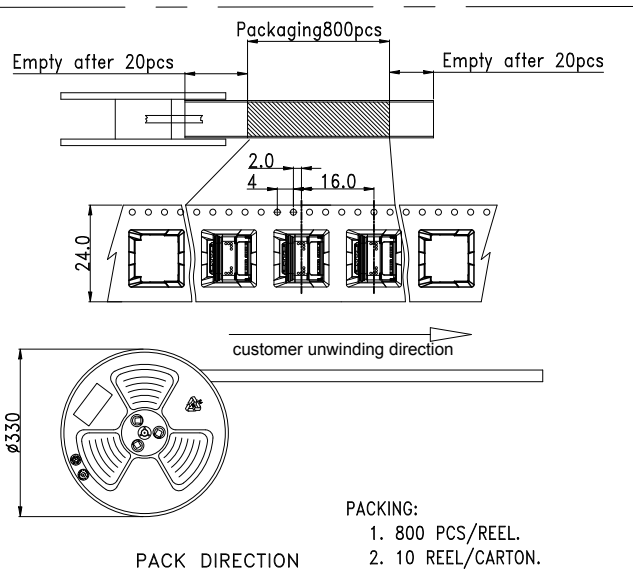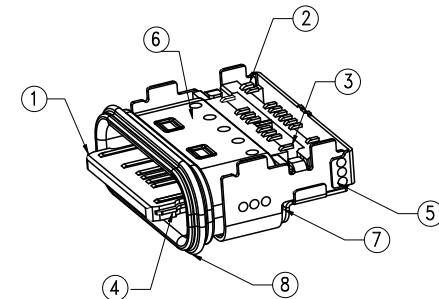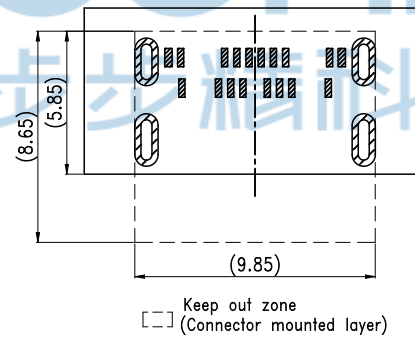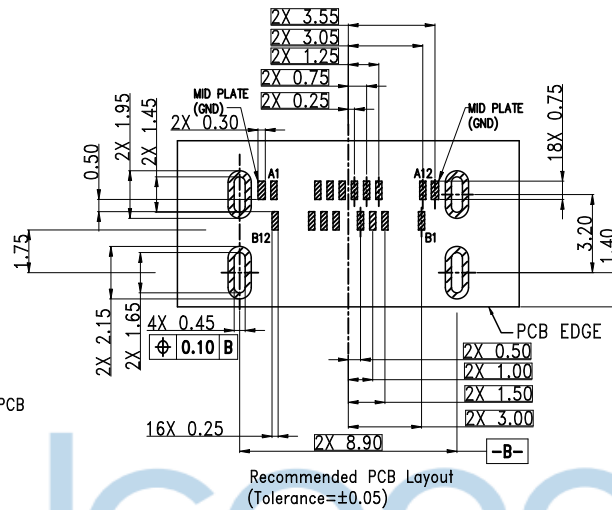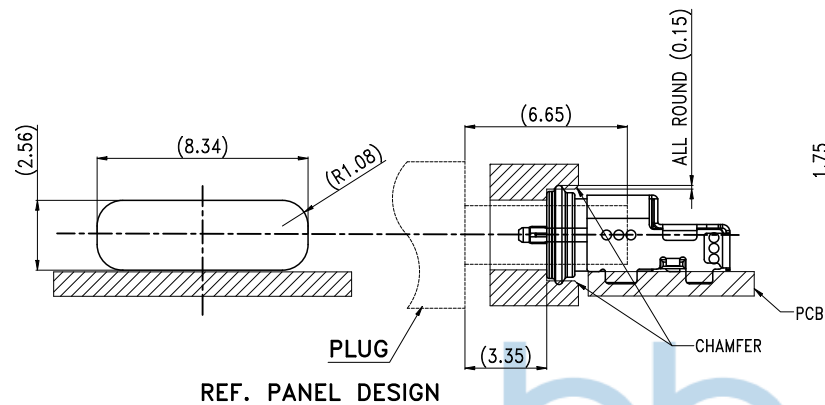

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司		NAME: TYPE-C 16P 防水母座 板上四脚插 端子双 排SMT L=7.50 CH=1.5 舌片外漏1.15 IPX8	
APPD.	JM_Zheng	PJ. NO.: 126-221-160001-M2G		SIZE: A4 DRW NO.:	
CHKD.	TSP	FINISH: SEE NOTES		MAT'L.: SEE NOTES	
DR.	LYX	SCALE: N/A		REV.: A0	
PDWG.NO: 0869-2		UNIT: mm		PAGE: 2/2	