





22040901 批次号
流水码1...9
生产设备编号0~9
日
月
年
标记说明








NOTES:

SPECIFICATION:

1. CURRENT RATING: 5A MAX
2. VOLTAGE: 100 VAC
3. TEMPERATURE RANGE: -40 °C ~ 85 °C
4. CONTACT RESISTANCE: 40 MILLIONHM MAX
5. INSULATION RESISTANCE: 100 MEGOHMS MIN.
6. LNSERTION FORCE : 5N~20N
7. UNMATING FORCE: 8N~20N
8. DURABILITY: 10,000 CYCLES
9. Water Resistance: IPX7

PIN 定义:

PIN NUMBER	SIGNAL NAME	PIN NUMBER	SIGNAL NAME
A1	GND	B12	GND
A2	SSTXp1	B11	SSRXp1
A3	SSTXn1	B10	SSRXn1
A4	Vbus	B9	Vbus
A5	CC1	B8	SBU2
A6	Dp1	B7	Dn2
A7	Dn1	B6	Dp2
A8	SBU1	B5	CC2
A9	Vbus	B4	Vbus
A10	SSRXn2	B3	SSTXn2
A11	SSRXp2	B2	SSTXp2
A12	GND	B1	GND

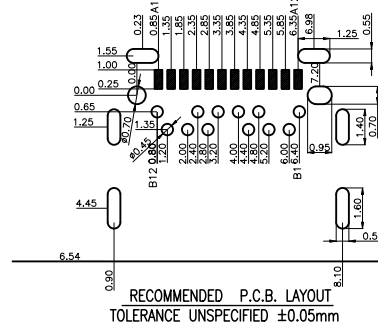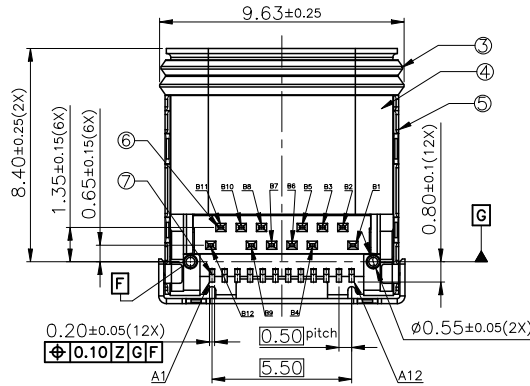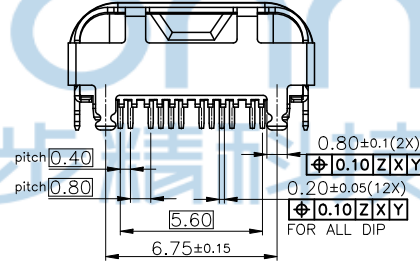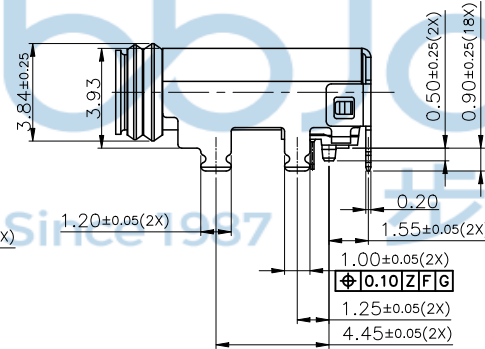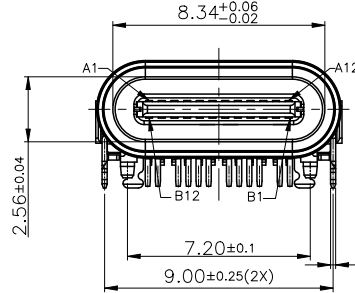

RECOMMENDED P.C.B. LAYOUT
TOLERANCE UNSPECIFIED ±0.05mm



⑦	SMT 端子	12	C18140-H T=0.12mm	电镀: 打镍底50u"min, 接触区镀镍80u"min, 接触区镀金15u"min, 接触区非接触面1u"min, 焊脚镀Sn50~150u"
⑥	DIP 端子	12	C18140-H T=0.12mm	电镀: 打镍底50u"min, 接触区镀镍80u"min, 接触区镀金15u"min, 接触区非接触面1u"min, 焊脚镀Sn50~150u"
⑤	外壳	1	SUS304-H T=0.20mm	整体电镀可焊镀50u" MIN
④	内壳	1	SUS316L T=0.20mm	磁力研磨+清洗
③	防水圈	1	硅橡胶 硬度50	黑色
②	塑胶主体	1	NYLON PA10T	橙色
①	中铜片	1	SUS301-EH T=0.15mm	清洗
NO.	零件名称	数量	材质	颜色/电镀

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co., Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
OR IN PART WITHOUT
PRIOR WRITTEN PERMISSION.
PDWG,NO: 0904-1

.X: ±0.38 .XX: ±0.25 .XXX: ±0.13		X': ±3" .X': ±2" .XX': ±1"		NAME: TYPE-C 24P 防水母座 板上型 六脚插 带柱 带后盖 L=10.05 CH2.20 SMT+DIP 端子镀金1u IPX7	
APPD.	JM_Zheng	P.J. NO.: 126-223-240001-J8G		SIZE: A4 DRW NO.:	
CHKD.	LYX	FINISH: SEE NOTES		MAT'L.: SEE NOTES	
DR.	LYL	SCALE: N/A		REV.: A0	UNIT: mm
				PAGE: 1/2	

深圳市步步精科技有限公司

REV.	ECN NO	CONTENT	DATE	ENGINEER
A0		Initial release	/	LYL

产品放置方向

留空10PCS

实装产品500PCS

留空15PCS

产品摆放方向

绕盘方向


上带剥离角度
165°~180°

透明环保防静电载带

出料方向

4.0±0.10
4.0±0.10

4.0±0.10
4.0±0.10

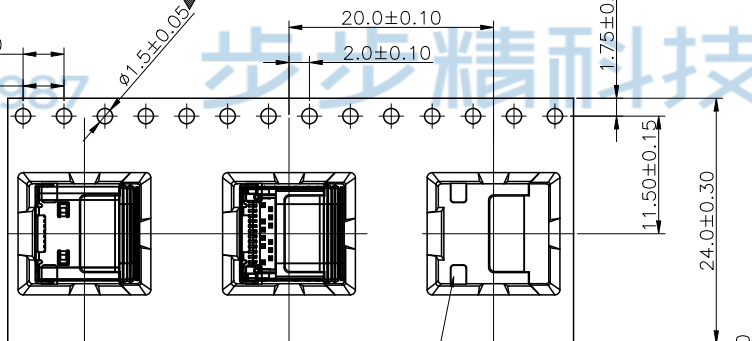

凸台不可缺失, 变形

0.50±0.15



载带尺寸

技术要求:

1. 上圆孔十个孔距离累计允许公差为±0.2mm;
2. 带长250mm内容许弯曲度1mm;
3. 材料: 透明PS, T=0.50±0.05mm;
4. 卷轮为塑胶卷轮: 外径φ330mm+轴径φ100mm
5. 环保: 材料需符合ROHS+无卤要求,
6. 单卷可装粒数: 500pcs+前留空15pcs, 后留空10pcs.
7. 每卷由供应商搭配卷盘包装一并供货.
8. 载带需参考产品出料方向绕盘, 避免我司重复倒盘.
9. 产品放置载带中不可有严重晃动, 不可对产品产生变形等其他不良.
9. 标" "尺寸为关键配合尺寸.

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co., Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
OR IN PART WITHOUT
PRIOR WRITTEN PERMISSION.
PDWG.NO: 0904-1

深圳市步步精科技有限公司	
.X: ±0.38 .XX: ±0.25 .XXX: ±0.13	X': ±3" .X': ±2" .XX': ±1"
NAME: TYPE-C 24P 防水母座 板上型 六脚插 带柱 带后盖 L=10.05 CH2.20 SMT+DIP 端子镀金1u IPX7	PJ. NO.: 126-223-240001-J8G
APPD. JM_Zheng	SIZE: A4 DRW NO.:
CHKD. LYX	FINISH: SEE NOTES MAT'L.: SEE NOTES
DR. LYL	SCALE: N/A REV.: A0 UNIT: mm PAGE: 2/2