
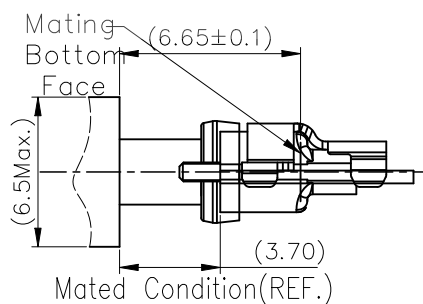
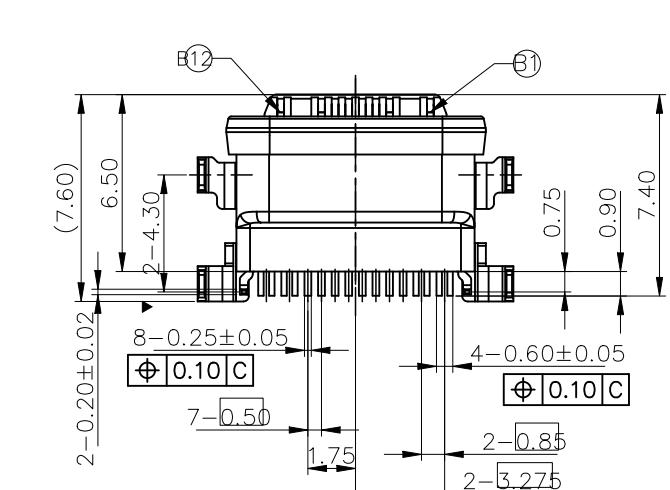
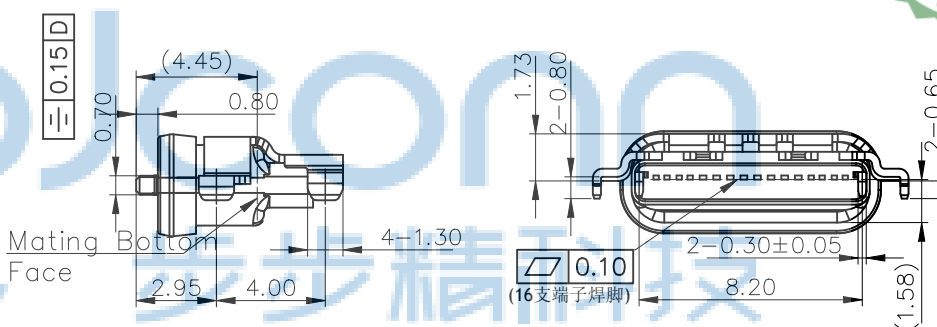
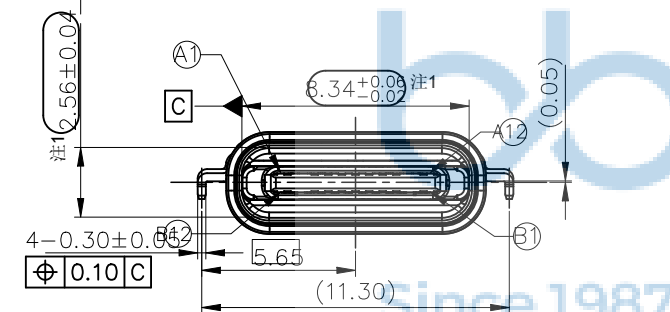
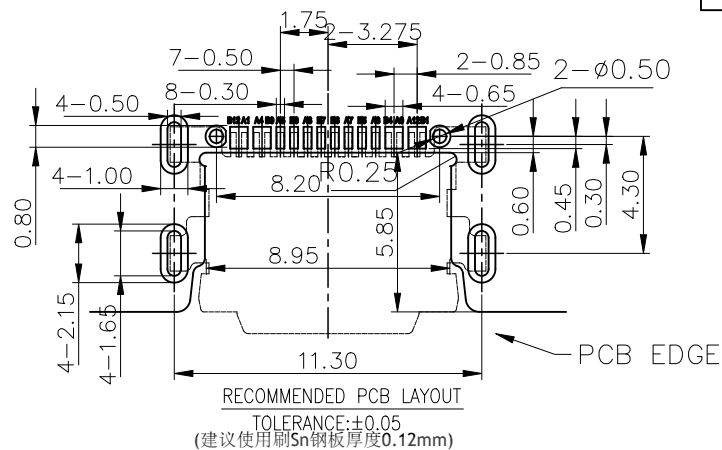


REV.	ECN NO	CONTENT	DATE	ENGINEER
AO		Initial release	/	SGF

NOTES:

SPECIFICATION:

1. CURRENT RATING: 3.0A MAX
2. VOLTAGE: 100 VAC
3. TEMPERATURE RANGE: -30 °C ~ 85 °C
4. CONTACT RESISTANCE: 40 MILLIONHM MAX
5. INSULATION RESISTANCE: 100 MEGOHMS MIN.
6. INSERTION FORCE : 5N~20N
7. UNMATING FORCE: 8N~20N
8. DURABILITY: 10,000 CYCLES

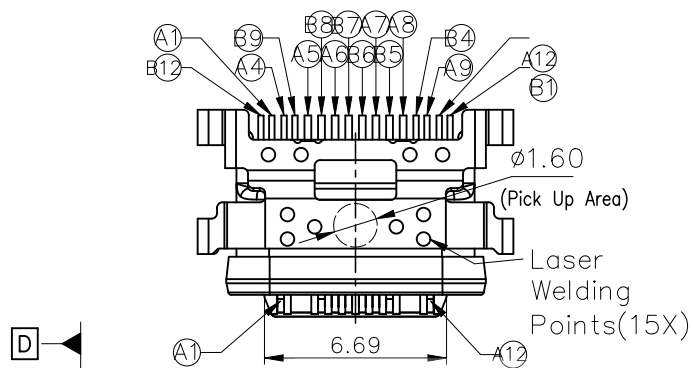

Pin Assignments

Contact Number	Signal Name	Contact Number	Signal Name
A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	Dp1	B7	Dn2
A7	Dn1	B6	Dp2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND

8	TOP SHELL	STAINLESS STEEL	Ti/Ni Plated	1PCS
7	SHELL	STAINLESS STEEL	Ni Plated	1PCS
6	OVER MOLDING	HIGH TEMPERATURE PLASTIC	BLACK	1PCS
5	TOP 1/M	HIGH TEMPERATURE PLASTIC	BLACK	1PCS
4	BOTTOM 1/M	HIGH TEMPERATURE PLASTIC	BLACK	1PCS
3	MID PLATE	STAINLESS STEEL	Ti/Ni Plated	1PCS
2	CONTACT	COPPER ALLOY	Au/Ni Plated	1SET
1	CONTACT	COPPER ALLOY	Au/Ni Plated	1SET
NO.	DESCRIPTION	MATERIAL	REMARKS	QTY

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
OR IN PART WITHOUT
PRIOR WRITTEN PERMISSION.

PDWG.NO: 0523-1



深圳市步步精科技有限公司

.X: ± 0.38	X*: $\pm 3'$
.XX: ± 0.25	.X*: $\pm 2'$
.XXX: ± 0.13	.XX*: $\pm 1'$

NAME: _____

TYPE-C 16P 防水母座 四脚插 帶柱 端子SMT 舌片
外露0.8 沉板1.58 L=7.4 帶胶圈 IP68 編帶

APPD.	JM_Zheng
-------	----------

	PJ. NO.: 126-224-160001-U9G
---	-----------------------------

N.	CHKD.	LYX
----	-------	-----

	SIZE: A4		DRW NO.:

FINISH: SEE NOTES	MAT'L.: SEE NOTES
-------------------	-------------------

SCALE: N/A	REV.: A0	UNIT: mm	PAGE: 1 / 2
------------	----------	----------	-------------

DR.





	SGF
--	-----

SCALE: N/A	REV.: A0
------------	----------

UNIT: mm	PAGE: 1/2
----------	-----------



注1: “”表示CPK尺寸

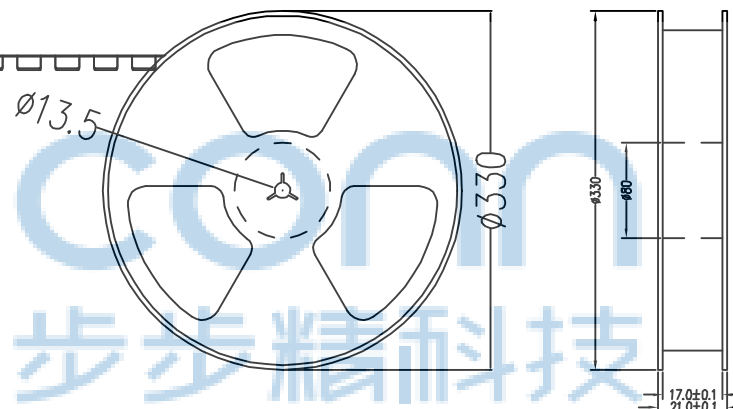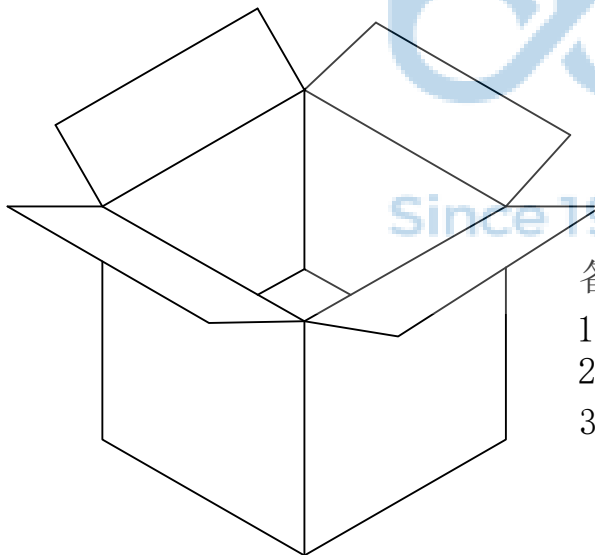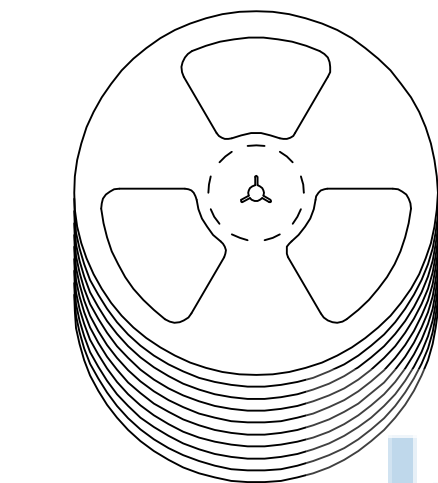

备注:

1. 包装数量: 1500/PCS/卷, 10卷/箱。
2. 包装袋长度: 每卷前后各空10-20个空格, 中间包装。
3. 材质:
载体: 聚丙烯 (PS), 阻抗 $10^{6-9} \Omega$
上带: 聚乙烯 (PET), 阻抗 $10^{6-11} \Omega$
卷盘: 聚苯乙烯。

纸箱规格: 345*345*23MM

纸箱规格: 345*345*35MM

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司	
.X: ±0.38 .XX: ±0.25 .XXX: ±0.13		X': ±3' .X': ±2' .XX': ±1'	
APPD.	JM_Zheng	NAME: TYPE-C 16P 防水母座 四脚插 带柱 端子SMT 舌片 外露0.8 沉板1.58 L=7.4 带胶圈 IP68 编带	
CHKD.	LYX	P.J. NO.: 126-224-160001-U9G	
DR.	SGF	SIZE: A4 DRW NO.:	
PDWG.NO: 0523-1		FINISH: SEE NOTES MAT'L.: SEE NOTES	
		SCALE: N/A REV.: A0 UNIT: mm PAGE: 2/2	