

Suggested adsorption size

REV.	ECN NO	CONTENT	DATE	ENGINEER
A0		Initial release	/	SGF

Note:

1.Material:


- 1.1 Housing: LCP
- 1.2 Contact:C7025,t=0.20mm
- 1.3 Shell: SUS316

2.ELECTRICAL:

- 2-1:CURRENT RATING:
VBUS AND GND CONTACTS RATED AT 1.25A
PARALLELED FOR A TOTAL OF 5A;
- 2-2:INITIAL CONTACT RESISTANCE :40 MEGOHMS
- 2-3:DIELECTRIC WITHSTANDING VOLTAGE:
100V AC MIN;

3:MECHANICAL CHARACTERISTICS:

- 3-1:MATING FORCE:5~20N
- 3-2:UNMATING FORCE:8~20N(INITIAL),
6~20N(AFTER 10000 CYCLES)
- 3-3:FREQUENCY: 200±50 CYCLES /HOUR,
10000 CYCLES
- 3-4:OPERATING TEMPERATURE ;-40°~80°.




plug 插入深度参考图

TABLE B

A5	CC1	B12	GND
A9	VBUS	B9	VBUS
A12	GND	B5	CC2
PIN	SIGNAL NAME	PIN	SIGNAL NAME
A1	GND	B12	GND
A2	SSTXP1	B11	SSRX1
A3	SSTXN1	B10	SSRXN1
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A10	SSRXN2	B3	SSTXN2
A11	SSRXP2	B2	SSTXP2
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME

RECOMMENDED P.C.B. LAYOUT (T:1.00mm)
TOLERANCE UNSPECIFIED ±0.05mm



THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
OR IN PART WITHOUT
PRIOR WRITTEN PERMISSION.



深圳市步步精科技有限公司

.X: ±0.38 X': ±3'
.XX: ±0.25 X'': ±2'
.XXX: ±0.13 .XX': ±1'

NAME: TYPE-C 24P 防水母座 直立式 四脚插 带柱 端子SMT
单筋位 外壳未冶金 IPX7 H=7.50 编带

APPD. JM_Zheng

CHKD. LYX

DR. SGF

PJ. NO.: 126-224-240002-N5G

SIZE: A4 DRW NO.:

FINISH: SEE NOTES MAT'L: SEE NOTES

SCALE: N/A REV.: A0 UNIT: mm PAGE: 1/2



密封开孔参考尺寸(仅供参考)
组装外壳时需要打环保润滑油

直压密封建议尺寸

机壳面相对密封圈与缩量0.30Min
(建议压缩量为密封圈下压方向40~50%)




REV.	ECN NO	CONTENT	DATE	ENGINEER
A0		Initial release	/	SGF

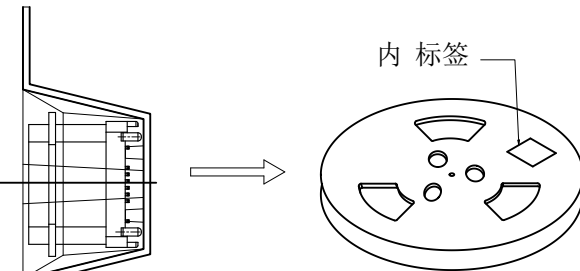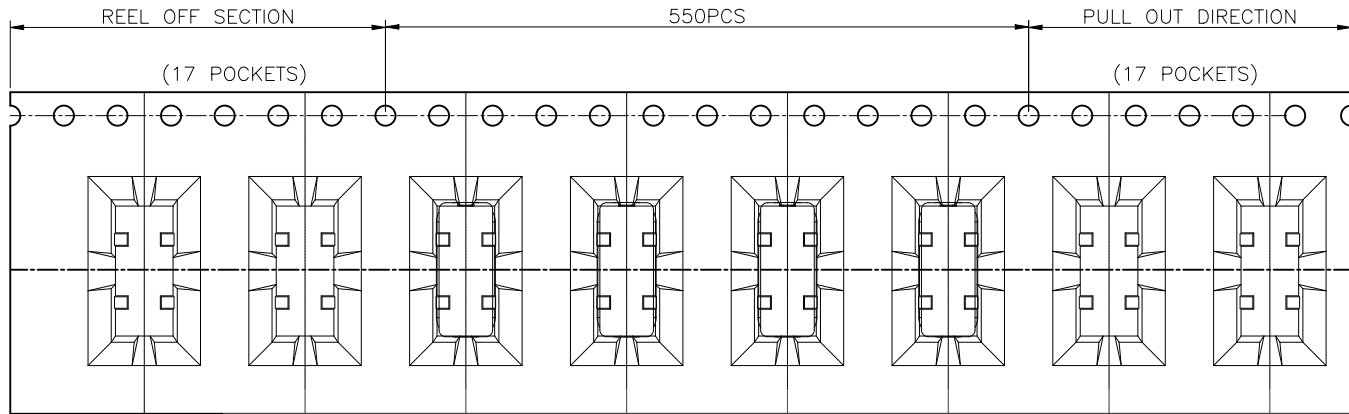


② 卷盘贴标签示意图


① 产品入载带示意图

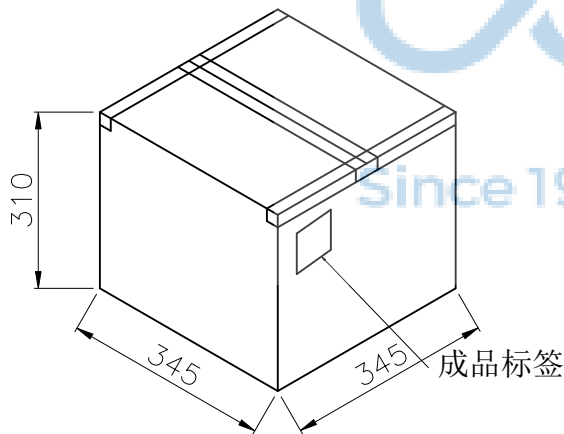

⑤ 外箱封箱示意图

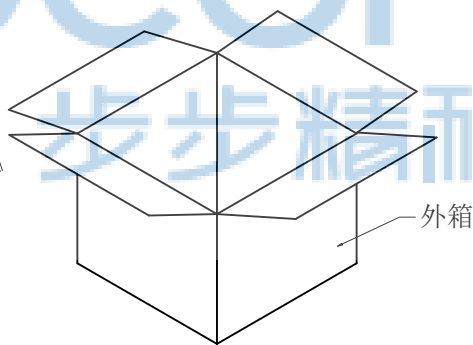

④ 产品入外箱示意图



③ 7盘产品叠层示意图



	REEL	CARTON
CONNECTOR (PCS)	550	3850

包装说明:

1. 将检验好的成品;对插口朝前放入载带;每卷装550PCS产品;具体如图一所示
2. 将包装好的产品;每盘必需贴上内标签;具体如图二所示
3. 将贴好内标签的产品每7盘叠;具体如图三所示
5. 装好后并封好纸箱及贴好相关标签;具体如图五所示;
(产品包装的标签,如客户有要求,请按客户要求包装出货)
6. 载带前面留17PCS空格,后面留17PCS空格
7. COVER与CARRY剥离力:50-125g,速度:300mm/分钟左右,
剥离角度:165°-180°



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION. PDWG.NO: 0366-2		深圳市步步精科技有限公司 NAME: TYPE-C 24P 防水母座 直立式 四脚插 带柱 端子SMT 单筋位 外壳粉末冶金 IPX7 H=7.50 编带 PJ. NO.: 126-224-240002-N5G SIZE: A4 DRW NO.: FINISH: SEE NOTES MAT'L: SEE NOTES SCALE: N/A REV.: A0 UNIT: mm PAGE: 2/2	
.X: ±0.38 .X': ±3' .XX: ±0.25 .X': ±2' .XXX: ±0.13 .XX': ±1'		APPD. JM_Zheng CHKD. LYX DR. SGF	