

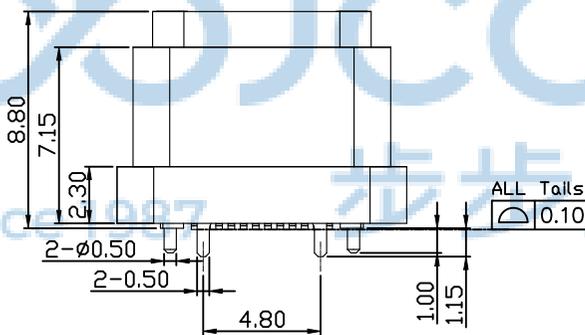
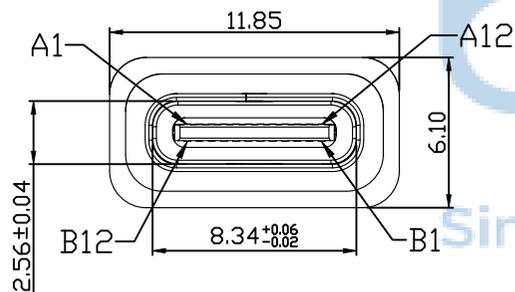
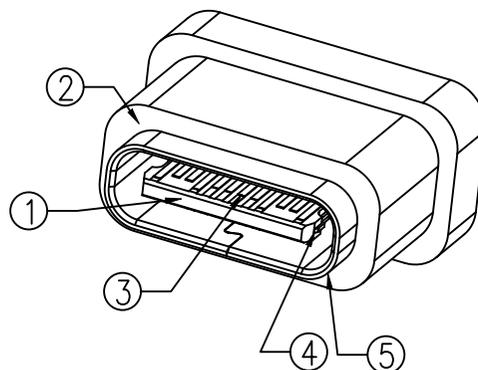
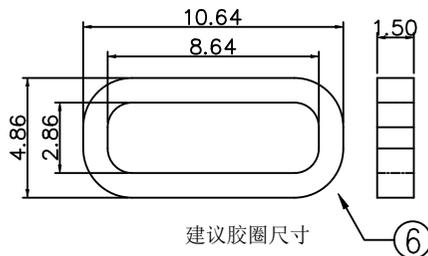



REV	ECN NO	CONTENT	DATE	ENGINEER
A0		INITIAL RELEASE	/	LHC

NOTES:
SPECIFICATION:

1. CURRENT RATING: 3.0A MAX
2. DIELECTRIC WITHSTAND VOLTAGE: 100VAC
3. TEMPERATURE RANGE: -30 °C ~ 85 °C
4. CONTACT RESISTANCE: 40 MILLIONHM MAX
5. INSULATION RESISTANCE: 100 MEGOHMS MIN.
6. INSERTION FORCE : 5N~20N
7. UNMATING FORCE: 8N~20N
8. DURABILITY:10,000 CYCLES



PIN NUMBER	SIGNAL NAME	PIN NUMBER	SIGNAL NAME
A1	GND	B12	GND
A2	SSTXp1	B11	SSRXp1
A3	SSTXn1	B10	SSRXn1
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	Dp1	B7	Dn2
A7	Dn1	B6	Dp2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A10	SSRXn2	B3	SSTXn2
A11	SSRXp2	B2	SSTXp2
A12	GND	B1	GND

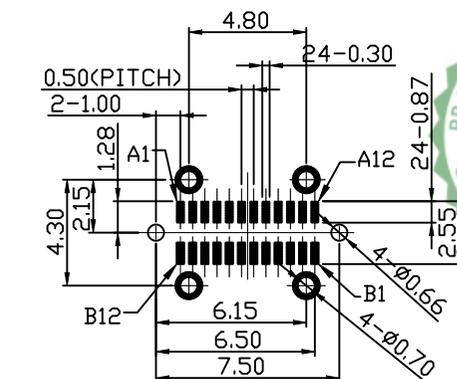

RECOMMENDED P.C.B. LAYOUT (T:1.00mm)
TOLERANCE UNSPECIFIED ±0.05mm



NO.	DESCRIPTION	MATERIAL	REMARKS	QTY
7	Cap	HIGH TEMPERATURE PLASTIC	BLACK	1PCS
6	防水圈	硅胶	BLACK	1PCS
5	SHELL	STAINLESS STEEL	NI Plated	1PCS
4	SHIELDING PLATE	STAINLESS STEEL	NI Plated	1PCS
3	CONTACT	COPPER ALLOY	Au/NI Plated	1SET
2	SHELL HOUSING	HIGH TEMPERATURE PLASTIC	BLACK	1PCS
1	HOUSING	HIGH TEMPERATURE PLASTIC	BLACK	1PCS

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
PRIOR WRITTEN PERMISSION.

bbJconn 深圳市步步精科技有限公司

.X: ±0.38 X°: ±3°
.XX: ±0.25 .X°: ±2°
.XXX: ±0.13 .XX°: ±1°

NAME: TYPE-C 24P 防水母座 直立式 四脚插 H=8.80
带柱 端子SMT IP67 (USBC-0053IPX7-00)

APPD JM_Zheng
CHKD LYX

PJ NO: UC.01.62-1W-0011
SIZE:A4 DRW NO:


PDWG NO: 0514-1

DR LHC


FINISH:SEE NOTES MAT'L:SEE NOTES
SCALE:N/A REV:A0 UNIT:mm PAGE:1/3

REV	ECN NO	CONTENT	DATE	ENGINEER
A0		INITIAL RELEASE	/	LHC


组装示意图

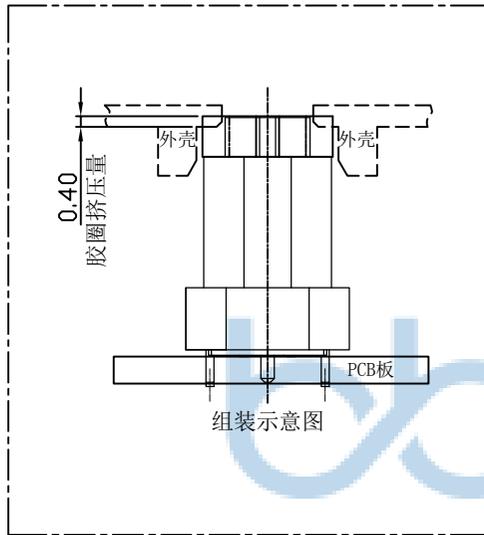

外壳参考设计图


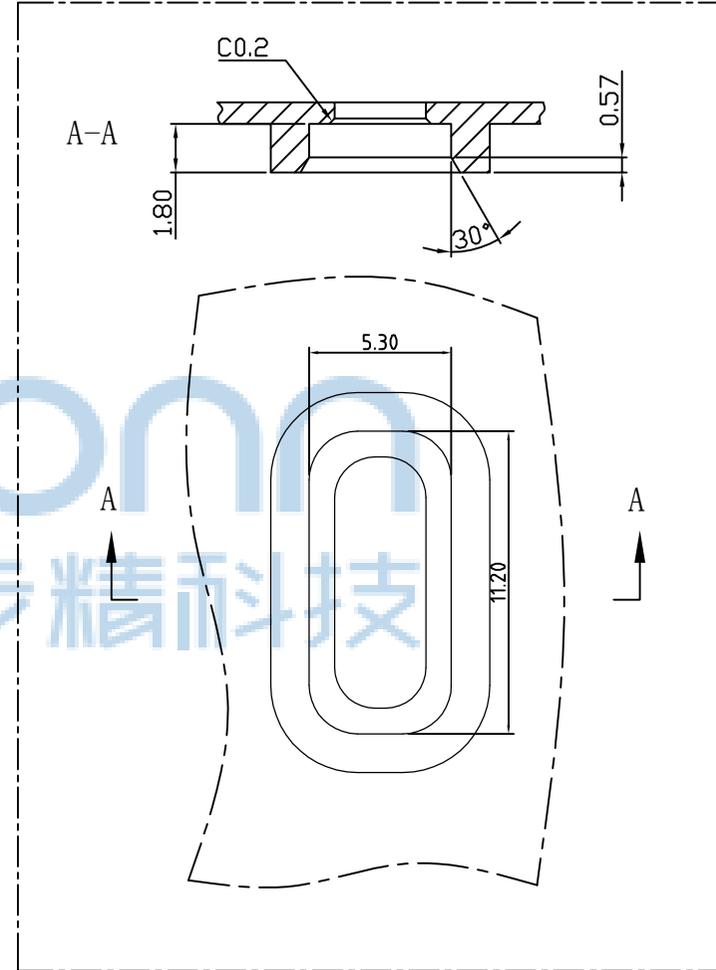


Since 1987 REF Vacuum Area


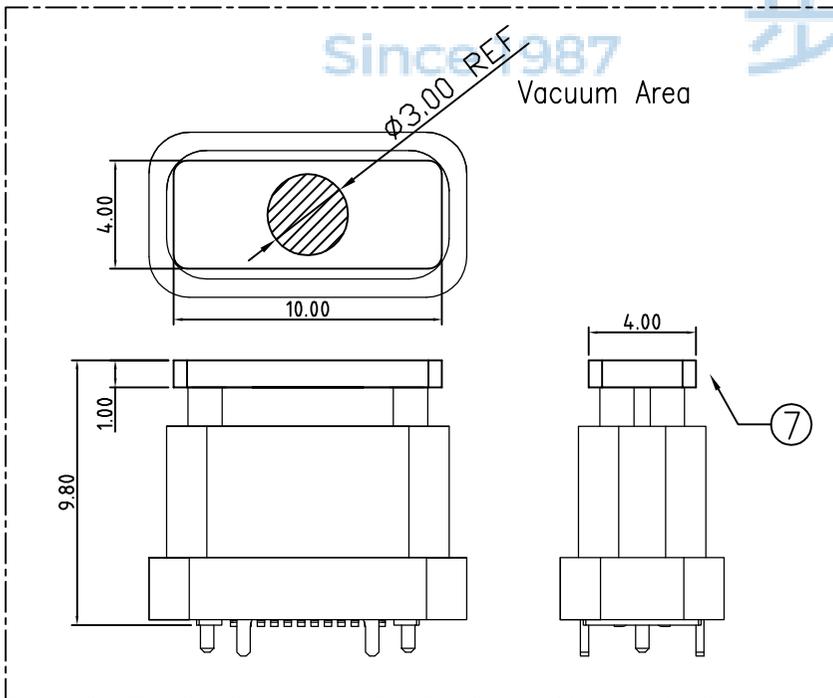


THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司	
.X: ± 0.38	.XX: ± 0.25	.XXX: ± 0.13	X*: $\pm 3^\circ$ X*: $\pm 2^\circ$.XX*: $\pm 1^\circ$
APPD	JM_Zheng	NAME: TYPE-C 24P 防水母座 直立式 四脚插 H=8.80 带柱 端子SMT IP67 (USBC-0053IPX7-00)	
CHKD	LYX	PJ NO: UC.01.62-1W-0011 SIZE:A4 DRW NO:	
PDWG NO: 0514-1	DR	LHC	FINISH:SEE NOTES SCALE:N/A REV:A0 UNIT:mm MAT'L:SEE NOTES PAGE:2/3

REV	ECN NO	CONTENT	DATE	ENGINEER
A0		INITIAL RELEASE	/	LHC

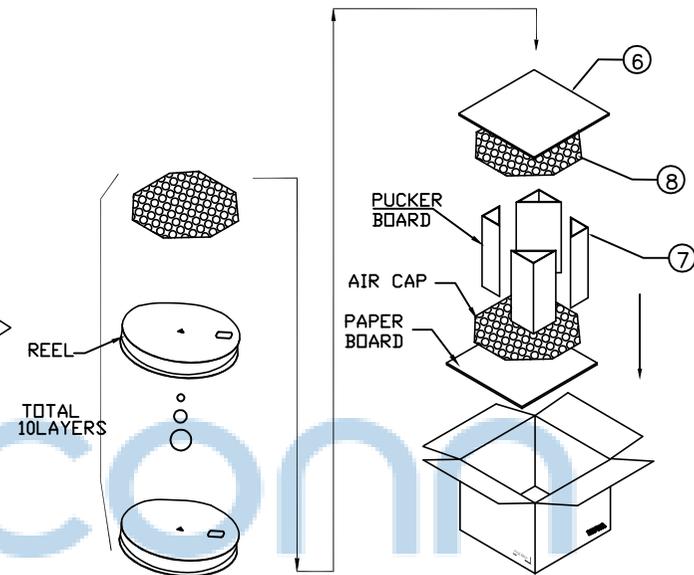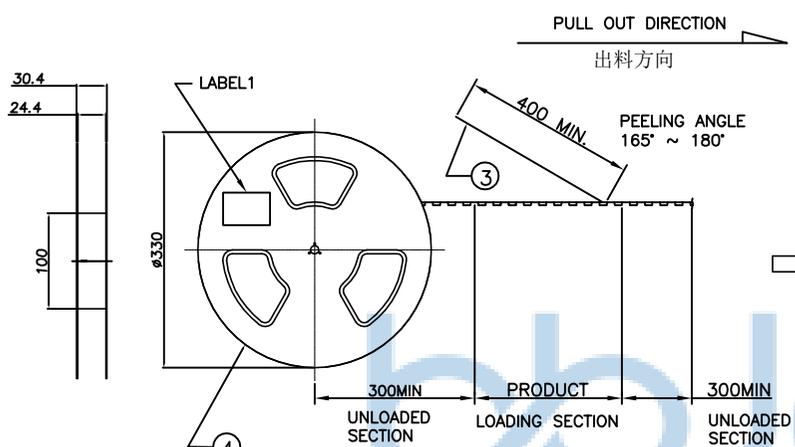

- 包装方式
 - 1-1: 使用半自动包装机, 先将 CARRY TAPE 送入导轨中, 并与 COVER TAPE 贴合在上面, 其中前端大于10空槽不要放产品, 尾端大于10空槽不要放产品, 然后将产品如图所示方向依次放入 CARRY TAPE 每个槽放1PCS;
 - 1.2. 用胶带将 CARRY TAPE 压合在一起, 包装后在图示指定位置贴上 LABEL;
 - 1-3: 按图示要求将10盘包装好的 REEL 装入纸箱, 纸箱上下按图示要求加垫海绵垫, 四角折三角垫固定;
 - 1-4: 将装好产品的纸箱按图示要求封箱, 在指定区域贴好 LABEL;
- 包装数量:
450PCS/REEL;
10REEL (4500PCS)/CARTON.
- 耐剥离性:
上带引拔力测试规格: 20-150gf
测试条件: 以每分钟300mm速度引拔测试

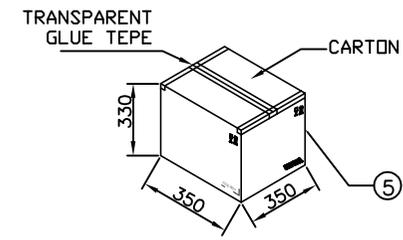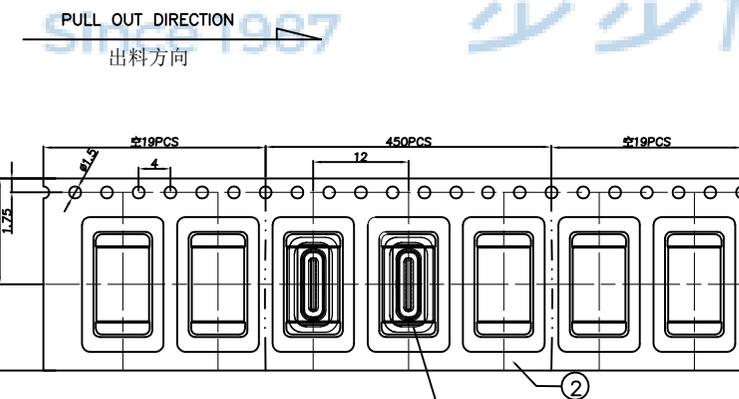

8	气泡垫	L=345,W=345,T=10	2PCS
7	纸板 (折三角垫)	L=430,W=330,T=6	4PCS
6	硬纸板	L=330,W=330,T=6	2PCS
5	外箱	L=350,W=350,H=330	1PCS
4	卷盘	PS,BLUE,A=330,B=100,W=32.4	10PCS
3	上带	PET,CLEAR,W=21.3	6.5m
2	载带	PS,BLACK,W=24,T=0.4,P=16	6.5m
1	UAB CONN	UAB CONN	4500PCS
NO.	NAME	SPEC	Q'TY

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司	
APPD	JM_Zheng	NAME: TYPE-C 24P 防水母座 直立式 四脚插 H=8.80 带柱 端子SMT IP67 (USBC-0053IPX7-00)	
CHKD	LYX	PJ NO: UC.01.62-1W-0011	
PDWG NO: 0514-1		SCALE: N/A	
DR	LHC	REV: A0	UNIT: mm
		PAGE: 3/3	