









REV.	ECN NO.	CONTENT	DATE	ENGINEER
A0		Initial release	/	GZY




NOTES :

SPECIFICATION:

1. CURRENT RATING: 3.0A MAX
2. VOLTAGE: 100 VAC
3. TEMPERATURE RANGE: -30° C~+85° C
4. CONTACT RESISTANCE: 40 MILLION HM MAX
5. INSULATION RESISTANCE: 100 MEG OHMS MIN
6. LNSERTION FORCE: 5N~20N
7. UNMATING FORCE: 8N-20N
8. DURABILITY: 10000 CYCLES
9. WATER PROOFNESS: THIS PRODUCT IS BASED ON IPX8.

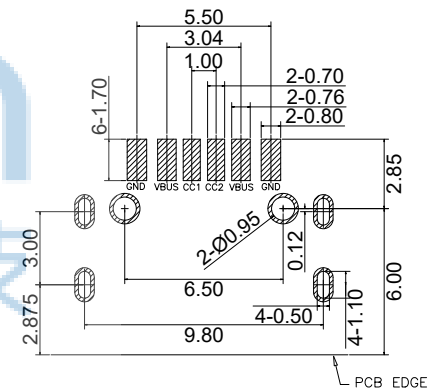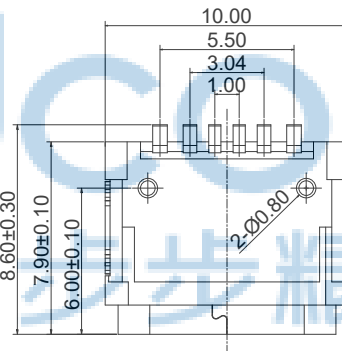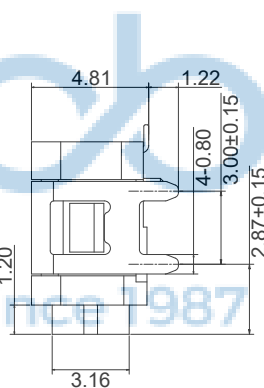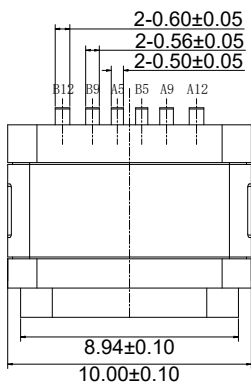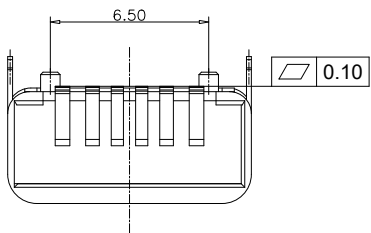

RECOMMEND P.C.B LAYOUT(COMPONENT SIDE)
TOLERANCE FOR PCB LAYOUT IS ± 0.05

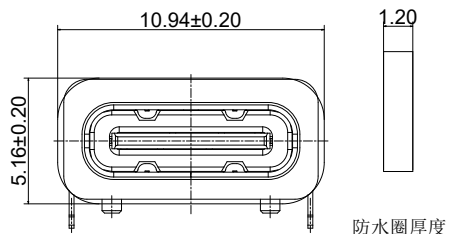

加防水圈示意图

防水圈厚度

TABLE:

NO	PART	Q'TY	Material
1	SHELL	1	SUS304-1/2H,T=0.3mm,NI PLATED
2	CONTACT	6	C2680-EH,T=0.20mm,TIN/Au/NI PLATED
3	MID PLATE	1	SUS301-3/4H,NO PLATING
4	MD HOUSING	1	LCP/PA9T BLACK UL94 V-0
5	SHIELDING PLATE	1	SUS304-3/4H, T=0.20mm;NI PLATED

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE

OR IN PART WITHOUT
PRIOR WRITTEN PERMISSION.

PDWG,NO: 0366-2



深圳市步步精科技有限公司

.X: ± 0.38	X*: $\pm 3^\circ$
.XX: ± 0.25	.X*: $\pm 2^\circ$
.XXX: ± 0.13	.XX*: $\pm 1^\circ$

APPD. JM_Zheng

CHKD. LYX

DR.	GZY
-----	-----

NAME: TYPE-C 6P 防水母座 板上型 外壳四脚DIP 端子SMT
L=7.90 不锈钢外壳 LCP黑胶 IPX8 方型防水圈 编带

	PJ. NO.: 126-221-060002-N5G
---	-----------------------------

SIZE: A4 | DRW NO.:

FINISH: SEE NOTES	MAT'L.: SEE NOTES
-------------------	-------------------


SCALE: N/A	REV.: A0	UNIT: mm	PAGE: 1/
------------	----------	----------	----------




USB TYPE-C PIN ASSIGNMENTS

PIN NUMBER	A1	A2	A3	A4	A5	A6	A7	A8	A9	A10	A11	A12
SIGNAL NAME					CC1				V _{BUS}			GND
PIN NUMBER	B12	B11	B10	B9	B8	B7	B6	B5	B4	B3	B2	B1
SIGNAL NAME	GND			V _{BUS}				CC2				


REV.	ECN NO.	CONTENT	DATE	ENGINEER
A0		Initial release	/	GZY

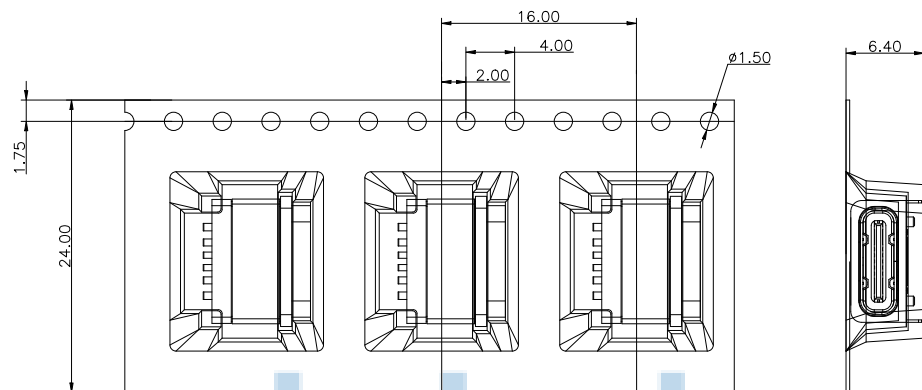


① 产品入载带示意图

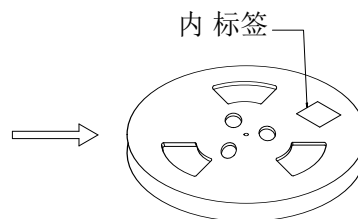


② 卷盘贴标签示意图

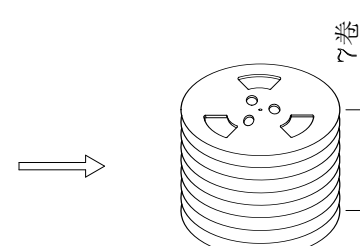

③ 7盘产品叠层示意图

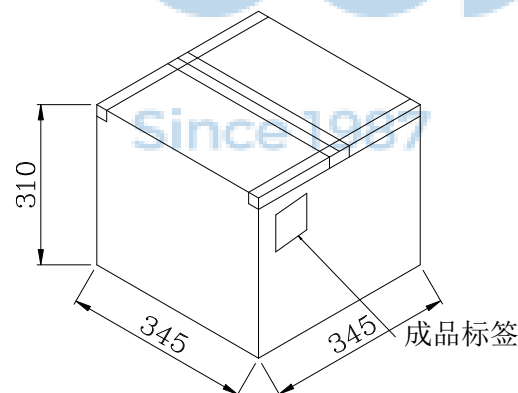

⑤ 外箱封箱示意图

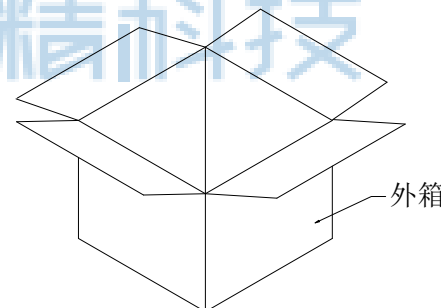

④ 产品入外箱示意图

	REEL	CARTON
CONNECTOR (PCS)	700	4900

包装说明:

1. 将检验好的成品;对插口朝前放入载带;每卷装700PCS产品;具体如图一所示
2. 将包装好的产品;每盘必需贴上内标签;具体如图二所示
3. 将贴好内标签的产品每7盘叠;具体如图三所示
5. 装好后并封好纸箱及贴好相关标签;具体如图五所示;
(产品包装的标签,如客户有要求,请按客户要求包装出货)
6. 载带前面留16PCS空格,后面留16PCS空格
7. COVER与CARRY剥离力:50-125g,速度:300mm/分钟左右,剥离角度:165°-180°

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION. PDWG.NO: 0366-2			深圳市步步精科技有限公司			
	.X: ±0.38 .XX: ±0.25 .XXX: ±0.13		X*: ±3° .X*: ±2° .XX*: ±1°		NAME: TYPE-C 6P 防水母座 板上型 外壳四脚DIP 端子SMT L=7.90 不锈钢外壳 LCP黑胶 IPX8 方型防水圈 编带	
	APPD.	JM_Zheng		PJ. NO.: 126-221-060002-N5G		
	CHKD.	LYX		SIZE: A4 DRW NO.:		
	DR.	GZY		FINISH: SEE NOTES MAT'L.: SEE NOTES		
		SCALE: N/A		REV.: A0	UNIT: mm	PAGE: 2