

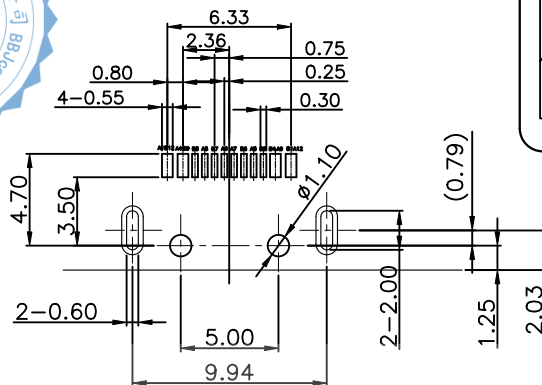


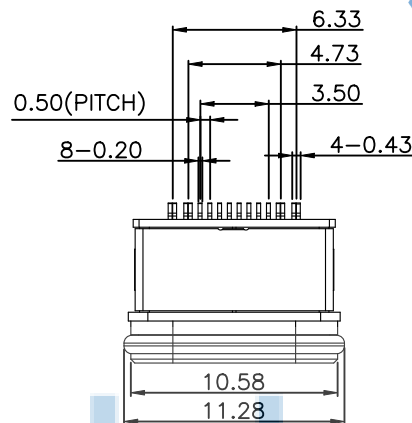








REV.	ECN NO	CONTENT	DATE	ENGINEER
A0		Initial release	/	GZY

SPECIFICATION:

1. CURRENT RATING: 3.0A MAX
2. DIELECTRIC WITHSTAND VOLTAGE: 100VAC
3. TEMPERATURE RANGE: -30 °C ~ 85 °C
4. CONTACT RESISTANCE: 40 MILLIONHM MAX
5. INSULATION RESISTANCE: 100 MEGOHMS MIN.
6. INSERTION FORCE : 5N~20N
7. UNMATING FORCE: 8N~20N
8. DURABILITY:10,000 CYCLES
9. WATER PROOFNESS:THIS PRODUCT IS BASED ON IPX8.



Recommended P.C.B. Layout
Unspecified tolerance: ±0.05
(Top view)

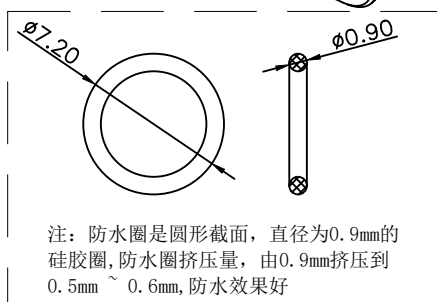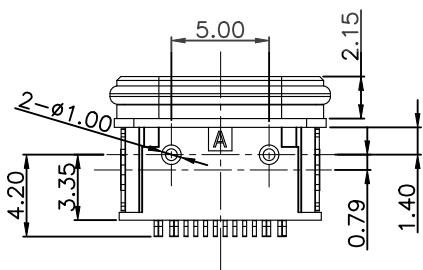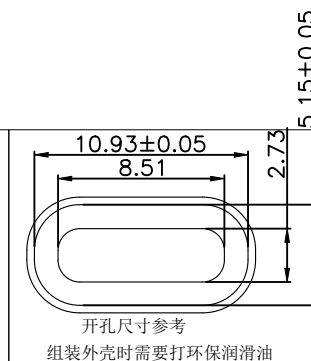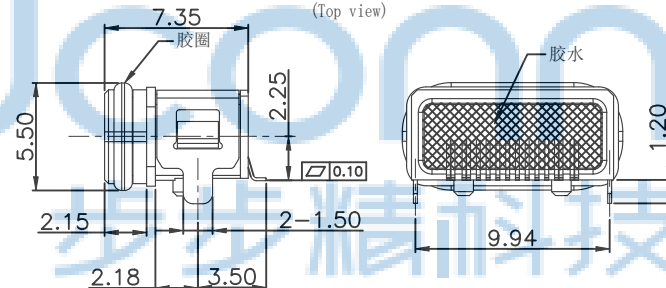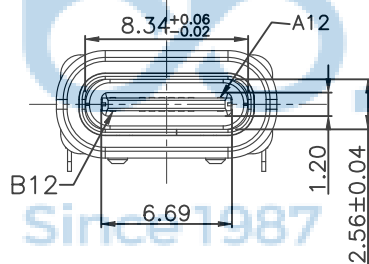



A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME

5	Shell2	1	SUS301 Ni Plating T=0.20mm	Ni:40u"Min;
4	Shell1	1	SUS304 Ni Plating T=0.30mm	Ni:40u"Min;
3	Housing2	1	PA10T(G.F30%)	
2	Contact	16	high conductivity copper Au/Ni Plating T=0.15mm	
1	Housing	1	PA10T (G.F30%)	
ITEM	PART NAME	Q' TY	FINISH	NOTE

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
OR IN PART WITHOUT
PRIOR WRITTEN PERMISSION.
PDWG,NO: 0514-1

深圳市步步精科技有限公司	
.X: ±0.38 .XX: ±0.25 .XXX: ±0.13	X': ±3" .X': ±2" .XX': ±1"
NAME: TYPE-C 防水母座 16P 90度 外壳两脚DIP 端子SMT L=7.35 CH=2.25 带柱 带中夹片 不锈钢外壳 PA10T IPX8 带防水圈 编带	
APPD. JM_Zheng	PJ. NO.: 126-221-160001-N6G
CHKD. LYX	SIZE: A4 DRW NO.:
DR. GZY	FINISH: SEE NOTES MAT'L: SEE NOTES
	SCALE: N/A REV.: A0 UNIT: mm PAGE: 1/2

REV.	ECN NO	CONTENT	DATE	ENGINEER
A0		Initial release	/	GZY

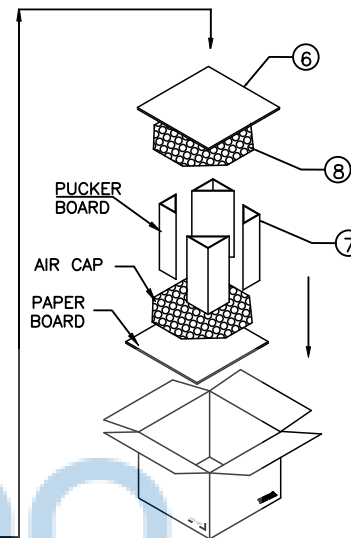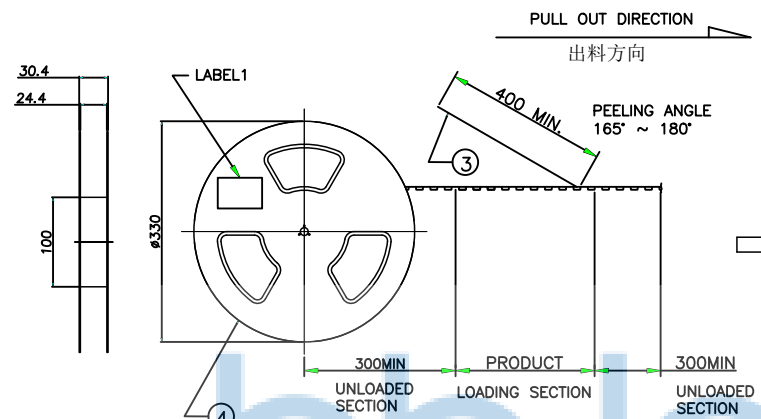

备注:

1. 包装方式

1-1: 使用半自动包装机, 先将 CARRY TAPE 送入导轨中, 并與 COVER TAPE 貼合在上面, 其中前端20空槽不要放產品, 尾端20 空槽不要放產品, 然后将產品如圖所示方向依次放入 CARRY TAPE 每個槽放1PCS;

1.2. 用膠帶將 CARRY TAPE 壓合在一起, 真空包裝后在图示指定位置貼上 LABEL;

1-3: 按图示要求將10盘包裝好的 REEL 套入防水袋后裝入紙箱, 紙箱上下按图示要求加墊硬紙板和海绵墊, 四角折三角墊固定;

1-4: 將裝好產品的紙箱按图示要求封箱, 在指定区域貼好 LABEL;

2. 包裝數量:



600PCS/REEL;

10REEL (6000PCS)/CARTON.

3. 耐剝離性:

上帶引拔力測試規格: 20-150gf

測試条件: 以每分鐘300mm 速度引拔測試

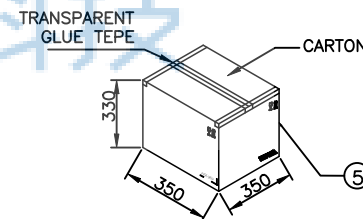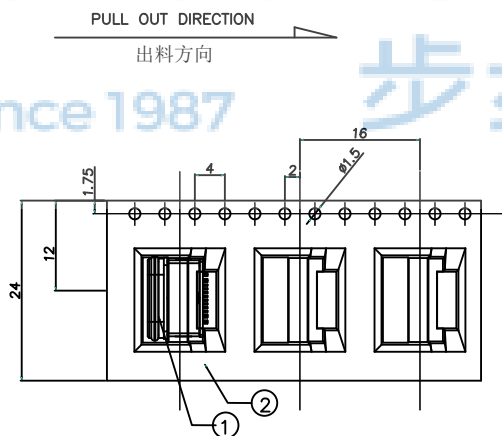

8	气泡垫	L=345,W=345,T=10	2PCS
7	纸板 (折三角垫)	L=430,W=330,T=6	4PCS
6	硬纸板	L=330,W=330,T=6	2PCS
5	外箱	L=350,W=350,H=330	1PCS
4	卷盘	PS,BLUE,A=330,B=100,W=32.4	10PCS
3	上带	PET,CLEAR,W=21.3	11.5m
2	载带	PS,CLEAR,W=24,T=0.4,P=16	11.5m
1	UAB CONN	UAB CONN	6000PCS
NO.	NAME	SPEC	Q'TY



THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
OR IN PART WITHOUT
PRIOR WRITTEN PERMISSION.
PDWG,NO: 0514-1

深圳市步步精科技有限公司	
.X: ±0.38 .XX: ±0.25 .XXX: ±0.13	X': ±3" .X': ±2" .XX': ±1"
NAME: TYPE-C 防水母座 16P 90度 外壳两脚DIP 端子SMT L=7.35 CH=2.25 带柱 带中夹片 不锈钢外壳 PA10T IPX8 带防水圈 编带	
APPD. JM_Zheng	PJ. NO.: 126-221-160001-N6G
CHKD. LYX	SIZE: A4 DRW NO.:
DR. GZY	FINISH: SEE NOTES MAT'L.: SEE NOTES
	SCALE: N/A REV.: A0 UNIT: mm PAGE: 2/2