

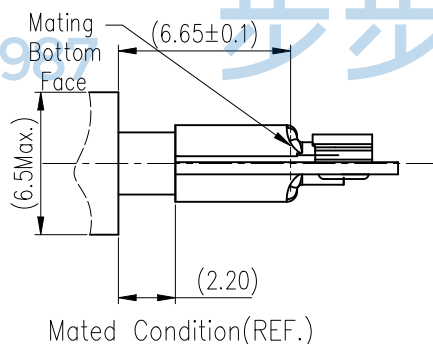
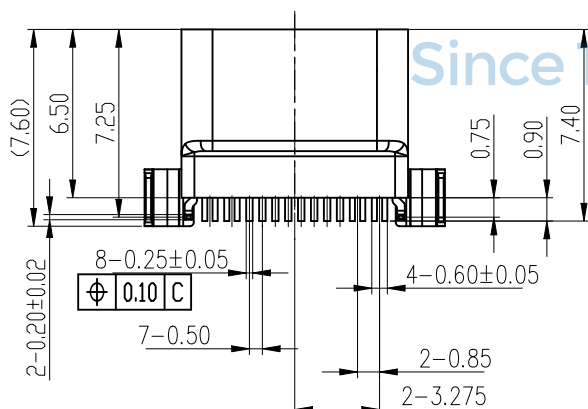
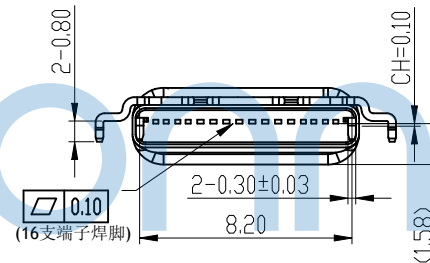
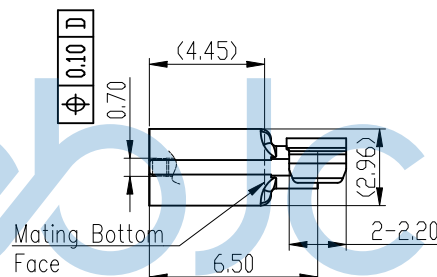
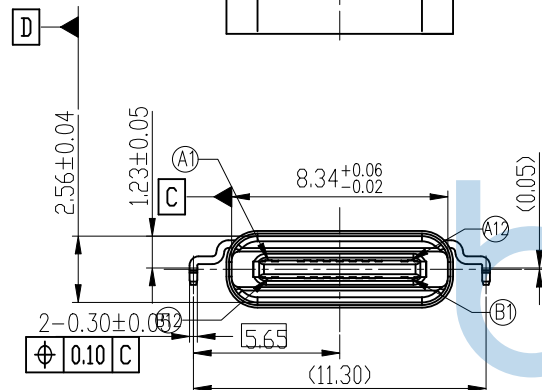


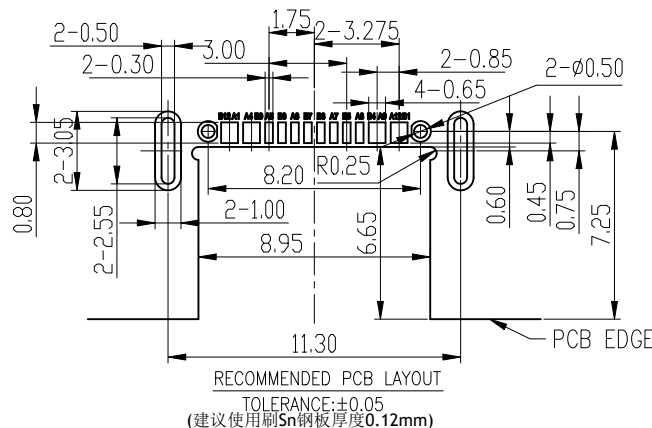

Pin Assignments			
Contact Number	Signal Name	Contact Number	Signal Name
A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	Dp1	B7	Dn2
A7	Dn1	B6	Dp2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND

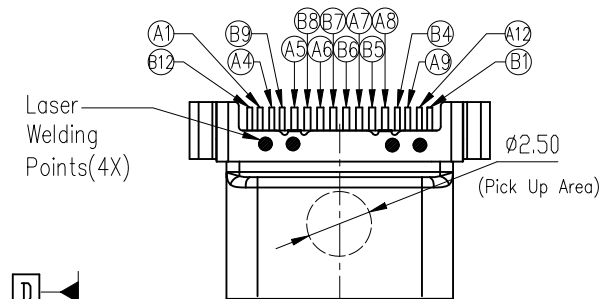





REV.	ECN NO	CONTENT	DATE	ENGINEER
A0		Initial release	/	TSP

NOTES:

- MATERIAL SPECIFICATION:
 - 1-HOUSING: High-Temp Plastics, UL94V-0, Color: Black.
 - 2-CONTACTS: Copper Alloy T=0.25mm.
 - 3-OUTER SHELL: Stainless Steel, T=0.30mm.
 - 4-INNER SHELL: Stainless Steel, T=0.20mm.
 - 5-MID-PLATE: Stainless Steel, T=0.20mm.
 - 6-SOLDER-PLATE: Stainless Steel, T=0.10mm.
 - 7-Glue: Silicone
- PLATING SPECIFICATION:
 - 1-CONTACTS:
 - Ni UNDERPLATED OVER ALL;
 - Gold Plated On Contact Area;
 - Gold Flash Plated On Solder Area.
 - 2-SHELL:
 - Ni UNDERPLATED OVER ALL;
- RoHS AND HF COMPLIANT.
- MECHANICAL PERFORMANCE:
 - 1-MATING FORCE: 6~20N (Initial); 5~20N (After)
 - 2-UNMATING FORCE: 8~20N (Initial); 6~20N (After)
 - 3-DURABILITY: 10000 CYCLES.
- ELECTRICAL PERFORMANCE:
 - 1-CURRENT RATING: 3.0A; VOLTAGE RATING: 5.0V
 - 2-LLCR:
 - VBUS & GND PINS: 40mΩ/PIN MAX.;
 - OTHERS PINS: 40mΩ/PIN MAX.;
 - LLCR MAX. CHANGE OF ALL PINS: 10mΩ.
 - 3-INSULATION RESISTANCE: 100MΩ MIN.
 - 4-DIELECTRIC WITHSTANDING VOLTAGE: 100V AC FOR 1 MINUTE.
- ENVIRONMENTAL PERFORMANCE:
 - OPERATING TEMPERATURE: -20°C ~ +85°C.
- RECOMMENDED PROCESS:
 - THE PEAK TEMPERATURE ON THE BOARD SHALL MAINTAIN 10±1 SECONDS AT 260±5°C.
- Waterproof grade: IP68



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION. PDWG.NO: 0523-1		深圳市步步精科技有限公司					
		.X: ±0.38 .XX: ±0.25 .XXX: ±0.13		X*: ±3* .X*: ±2* .XX*: ±1*		NAME: TYPE-C 16P 防水母座 L=7.60 CH=0.10 沉板1.58 外壳两脚插 端子SMT IP68	
		APPD. JM_Zheng				PJ. NO.: 126-221-160003-U9G	
		CHKD. LYX				SIZE: A4 DRW NO.:	
		FINISH: SEE NOTES		MAT'L.: SEE NOTES			
SCALE: N/A		REV.: A0		UNIT: mm		PAGE: 1/2	

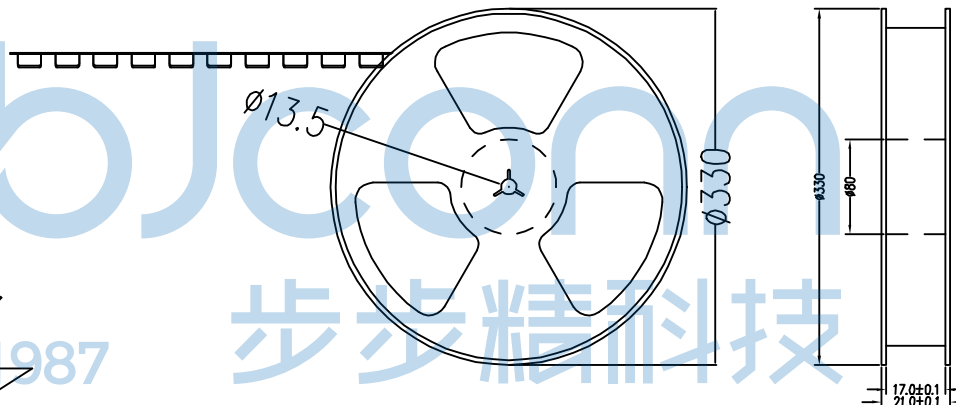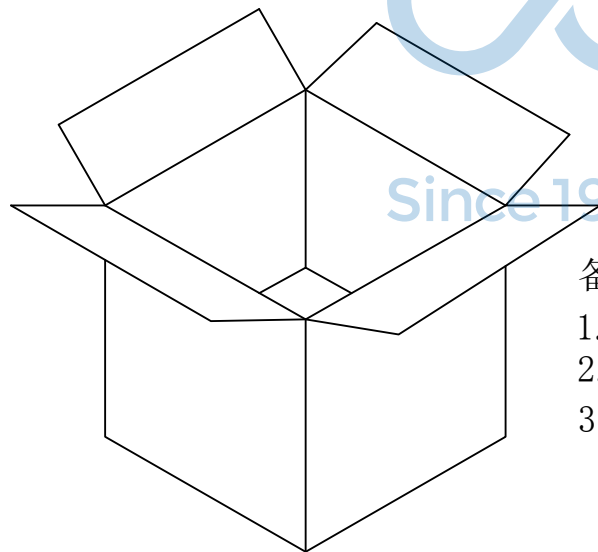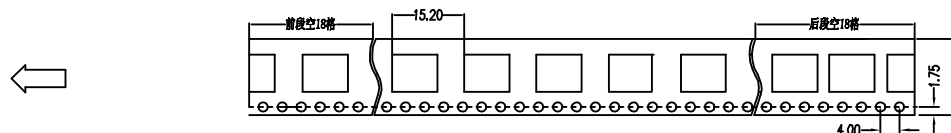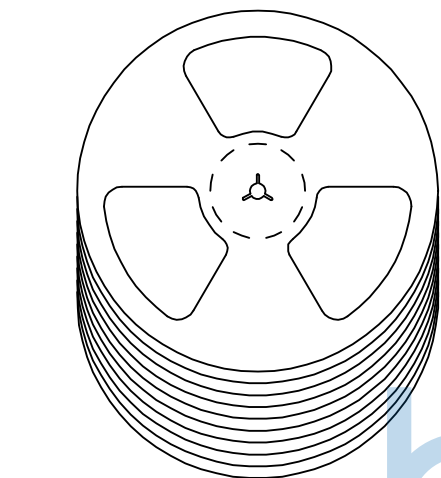

备注:

1. 包装数量: 1500/PCS/卷, 10卷/箱。
2. 包装袋长度: 每卷前后各空10-20个空格, 中间包装。
3. 材质:
载体: 聚丙烯 (PS) ,
上带: 聚乙烯 (PET) ,
卷盘: 聚苯乙烯。

纸箱规格: 345*345*23MM

纸箱规格: 345*345*35MM

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司	
.X: ±0.38 .XX: ±0.25 .XXX: ±0.13		X': ±3" .X': ±2" .XX': ±1"	
APPD. JM_Zheng		NAME: TYPE-C 16P 防水母座 L=7.60 CH=0.10 沉板1.58 外壳两脚插 端子SMT IP68	
CHKD. LYX		PJ. NO.: 126-221-160003-U9G	
DR. TSP		SIZE: A4 DRW NO.:	
PDWG.NO: 0523-1		FINISH: SEE NOTES MAT'L.: SEE NOTES	
		SCALE: N/A REV.: A0 UNIT: mm PAGE: 2/2	