






REV.	ECN NO	CONTENT	DATE	ENGINEER
A0		Initial release	/	SGF






3D VIEW

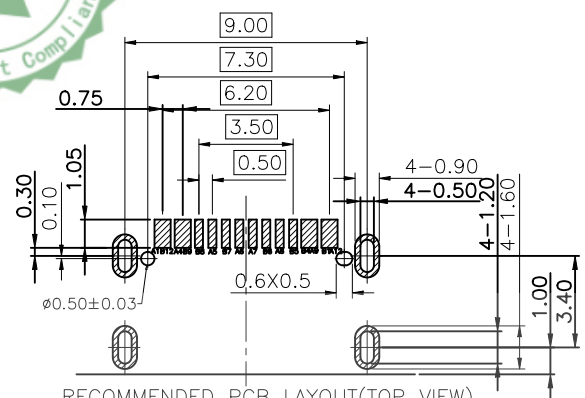


RECOMMENDED PCB LAYOUT(TOP VIEW)



THICKNESS T=0.8mm

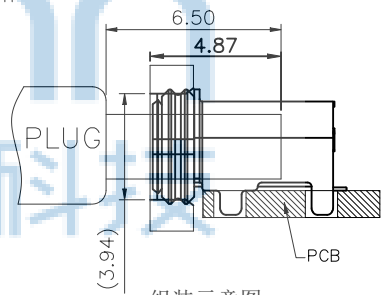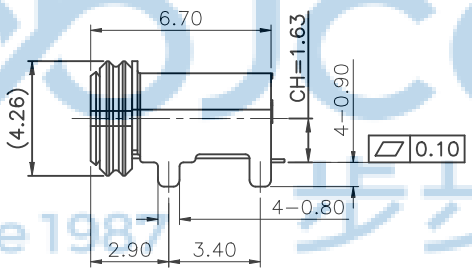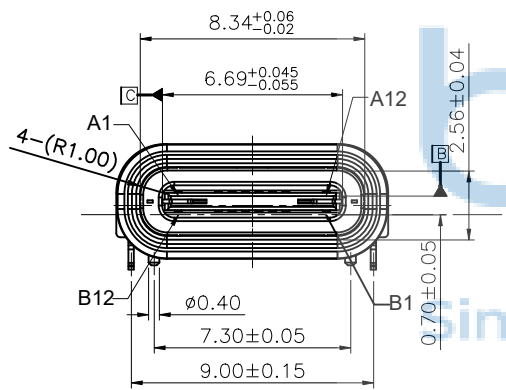

组装示意图

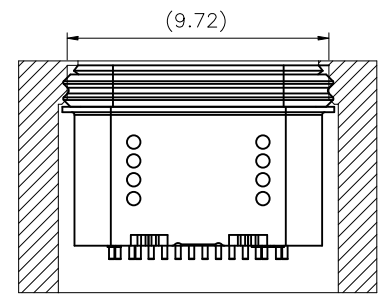

组装示意图

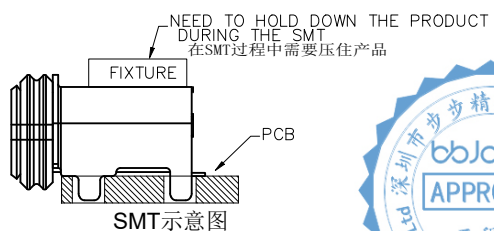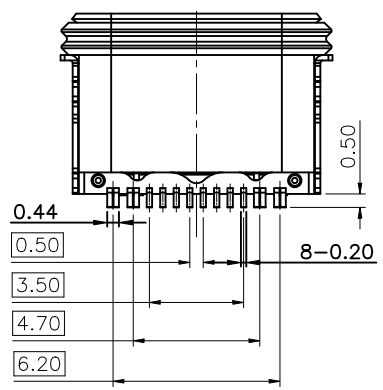

SMT示意图



TYPE C 16P ASSIGNMENTS

A1	A2	A3	A4	A5	A6	A7	A8	A9	A10	A11	A12
GND			VBUS	CC1	DP1	DN1	SBU1	VBUS			GND
GND			VBUS	SBU2	DN2	DP2	CC2	VBUS			GND
B12	B11	B10	B9	B8	B7	B6	B5	B4	B3	B2	B1

7	SEALING	1	SILICON DIOXIDE
6	MID PLATE	1	STAINLESS STEEL
5	OUTER SHELL	1	STAINLESS STEEL,PLATED NICKEL 40u"MIN
4	MAIN SHELL	1	SUS316L,PLATING NICKEL 40u"MIN
3	DOWN CONTACT	8	COPPER ALLOY, PLATING GOLD FLASH OVER NICKL ON CONTACT AREA AND SOLDER TAIL AREA
2	UPPER CONTACT	8	COPPER ALLOY, PLATING GOLD FLASH OVER NICKL ON CONTACT AREA AND SOLDER TAIL AREA
1	OVER MOLDING	1	HIGH TEMPERATURE RESISTANT PLASTIC,UL94 V-0.
PART NO.	PART NAME.	QUANTITY	NOTE

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.

PDWG.NO: 0366-2

深圳市步步精科技有限公司

NAME: TYPE-C 16P 防水母座 板上四脚插 端子SMT 带柱 L=6.7 CH=1.63 IPX7 编带

PJ. NO.: 126-221-160005-N5G

SIZE: A4 DRW NO.:





FINISH: SEE NOTES MAT'L: SEE NOTES

SCALE: N/A REV.: A0 UNIT: mm PAGE: 1/2

APPD. JM_Zheng

CHKD. LYX

DR. SGF

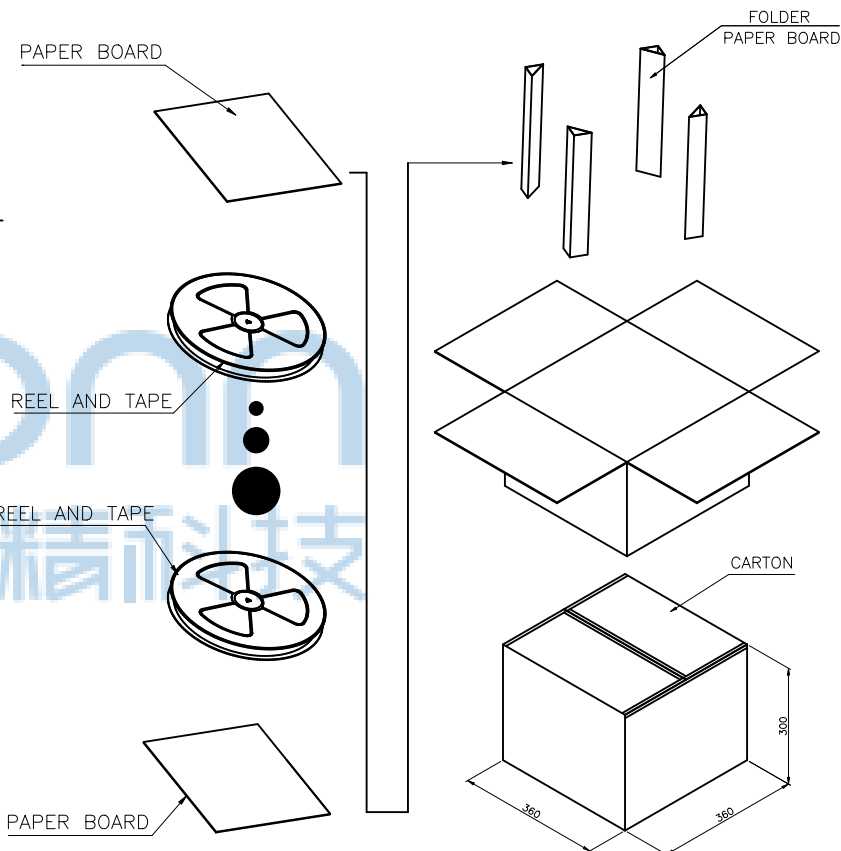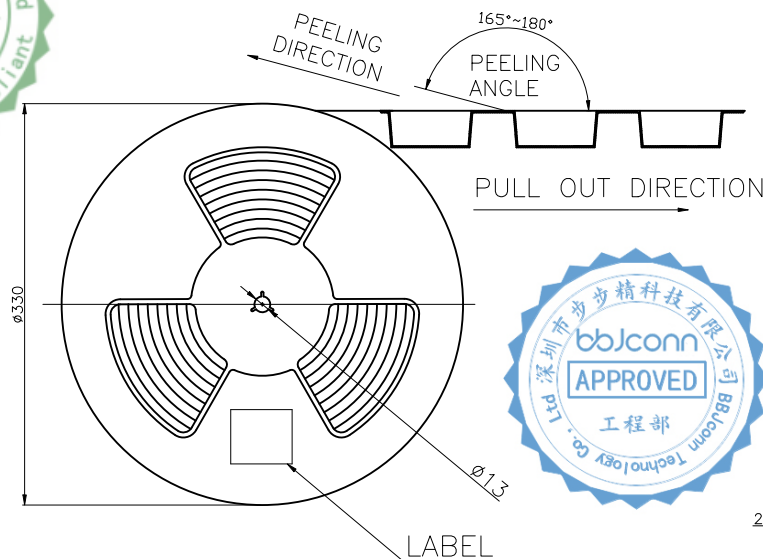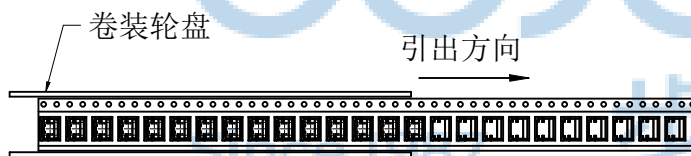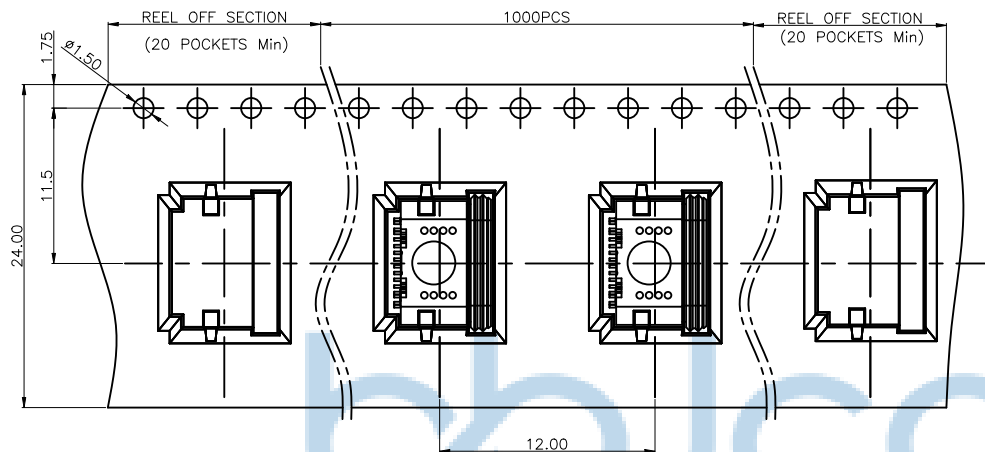

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
OR IN PART WITHOUT
PRIOR WRITTEN PERMISSION.
PDWG.NO: 0366-2

深圳市步步精科技有限公司		NAME: TYPE-C 16P 防水母座 板上四脚插 端子SMT 带柱 L=6.7 CH=1.63 IPX7 编带	
.X: ±0.38 .XX: ±0.25 .XXX: ±0.13	X': ±3' .X': ±2' .XX': ±1'	APPD. JM_Zheng	PJ. NO.: 126-221-160005-N5G
CHKD. LYX		SIZE: A4 DRW NO.:	
DR. SGF		FINISH: SEE NOTES	MAT'L: SEE NOTES
		SCALE: N/A	REV.: A0
		UNIT: mm	PAGE: 2/2