

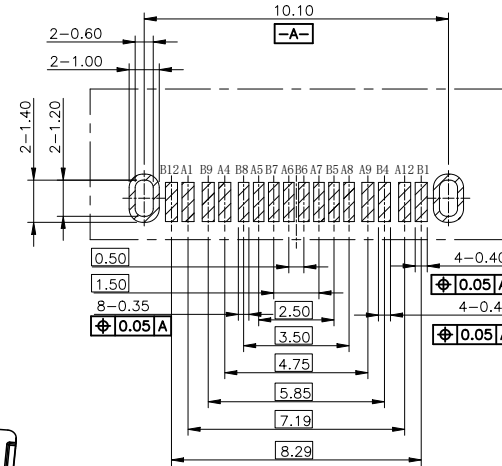



REV	ECN NO	CONTENT	DATE	ENGINEER
A0		INITIAL RELEASE	/	LYX

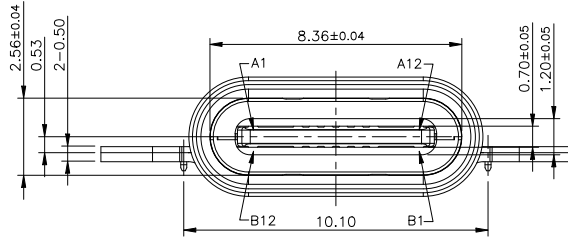




- NOTES:
- CURRENT RATING: 8A MAX.;
 - DIELECTRIC WITHSTANDING: 100V AC MIN.;
 - TEMPERATURE RANGE: -30°C~85°C;
 - CONTACT RESISTANCE: 40mΩ MAX.;
 - INSULATION RESISTANCE: 100MΩ MIN.;
 - DURABILITY: 10,000 CYCLES MIN.;
 - INSERTION FORCE: 5N~20N;
 - EXTRACTION FORCE:
(1) INITIAL: 8N~20N;
(2) AFTER DURABILITY: 6N~20N.
 - PRODUCT MEET THE REQUEST OF THE RoHS.



RECOMMENDED PCB LAYOUT(T=0.80)
SCALE: 2:1(GENERAL TOLERANCE±0.05)

A1	A2	A3	A4	A5	A6	A7	A8	A9	A10	A11	A12
GND	TX1+	TX1-	VBUS	CC1	D+	D-	SBU1	VBUS	RX2-	RX2+	GND
B1	B2	B3	B4	B5	B6	B7	B8	B9	B10	B11	B12
GND	RX1+	RX1-	VBUS	SBU2	D+	D-	CC2	VBUS	TX2-	TX2+	GND

PIN ASSIGNMENT
(FRONT VIEW)

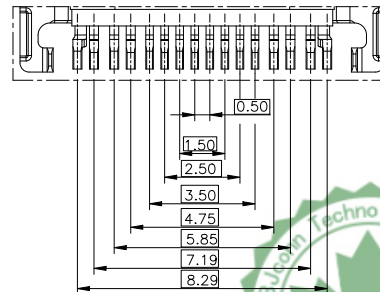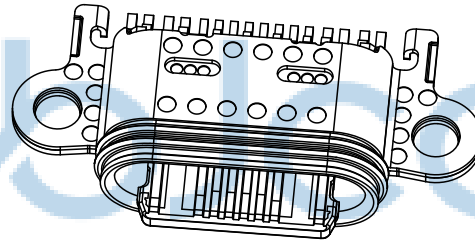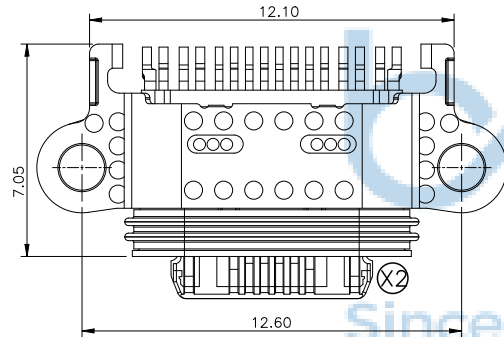



ITEM	PART NAME	Q'TY	MATERIAL	DESCRIPTION
11	MAIN HOUSING	1 PCS	HIGH TEMPERATURE PLASTIC	BLACK
10	TOP HOUSING	1 PCS	HIGH TEMPERATURE PLASTIC	BLACK
09	BOTTOM HOUSING	1 PCS	HIGH TEMPERATURE PLASTIC	BLACK
08	RUBBER	1 PCS	LSR	BLACK
07	LOW SHELL	1 PCS	STAINLESS STEEL	SOLDER:NI PLATED
06	UPPER SHELL	1 PCS	STAINLESS STEEL	SOLDER:AU GOLD FLASH/NI PLATED
05	INNER SHELL	1 PCS	STAINLESS STEEL	SOLDER:NI PLATED
04	SOLDERING PART	1 PCS	STAINLESS STEEL	SOLDER:NI PLATED
03	PLATE	1 PCS	STAINLESS STEEL	NO PLATING
02	CONTACT B	1 SET	COPPER ALLOY	Au:30u/NI PLATED
01	CONTACT A	1 SET	COPPER ALLOY	Au:30u/NI PLATED

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
PRIOR WRITTEN PERMISSION.

PDWG NO: 0332-1

深圳市步步精科技有限公司		NAME: TYPE-C 16P 防水母座 锁板式 沉板1.0 两脚插 L=7.05 舌片外漏1.4 SMT IPX7 镀金30u	
.X: ±0.38 .XX: ±0.25 .XXX: ±0.13	X': ±3' .X': ±2' .XX': ±1'	PJ NO:	SIZE:A4 DRW NO:
APPD	JM_Zheng	FINISH:SEE NOTES	MAT'L:SEE NOTES
CHKD	HMY	SCALE:N/A	REV:A0
DR	LYX	UNIT:mm	PAGE:1/2



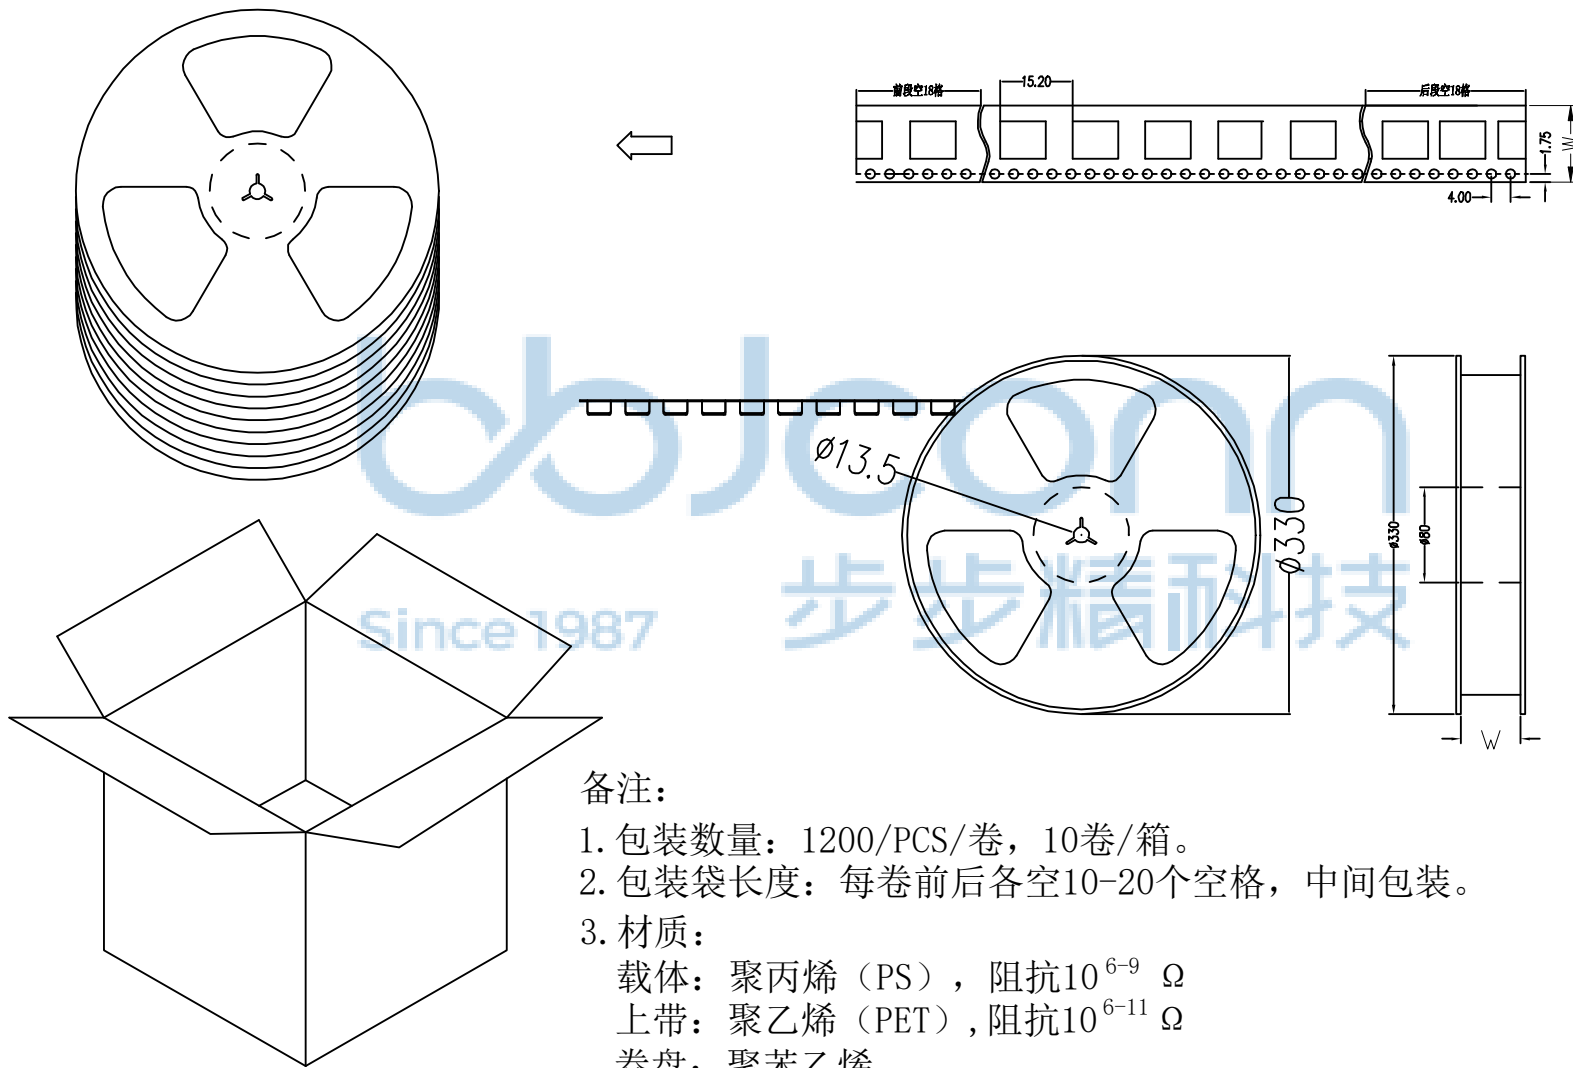

备注:

1. 包装数量: 1200/PCS/卷, 10卷/箱。
2. 包装袋长度: 每卷前后各空10-20个空格, 中间包装。
3. 材质:
载体: 聚丙烯 (PS), 阻抗 $10^{6-9} \Omega$
上带: 聚乙烯 (PET), 阻抗 $10^{6-11} \Omega$
卷盘: 聚苯乙烯。

纸箱规格: 345*345*230MM
纸箱规格: 345*345*350MM

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司	
.X: ± 0.38	X': $\pm 3'$	NAME: TYPE-C 16P 防水母座 锁板式 沉板1.0 两脚插 L=7.05 舌片外漏1.4 SMT IPX7 镀金30u	
.XX: ± 0.25	X': $\pm 2'$		
.XXX: ± 0.13	.XX': $\pm 1'$	PJ NO:	
APPD	JM_Zheng	SIZE:A4 DRW NO:	
CHKD	HMY	FINISH:SEE NOTES MAT'L:SEE NOTES	
DR	LYX	SCALE:N/A REV:A0 UNIT:mm PAGE:2/2	
PDWG NO: 0332-1			