







REV.	ECN NO	CONTENT	DATE	ENGINEER
A0		Initial release	/	GZY

组装示意图

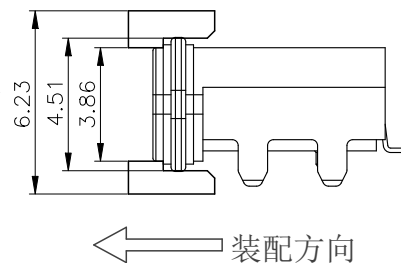

NOTES:

1. CURRENT RATING: 5A MAX
2. VOLTAGE: 100 VAC
3. TEMPERATURE RANGE: -40 °C ~ 85 °C
4. CONTACT RESISTANCE: 40 MILLIONHM MAX
5. INSULATION RESISTANCE: 100 MEGOHMS MIN.
6. LNSERTION FORCE : 5N~20N
7. UNMATING FORCE: 8N~20N
8. DURABILITY: 10,000 CYCLES
9. Water Resistance: IPX7

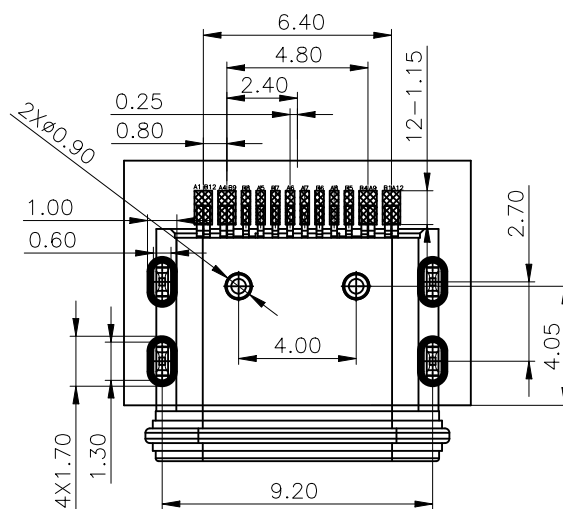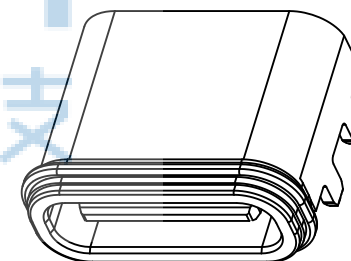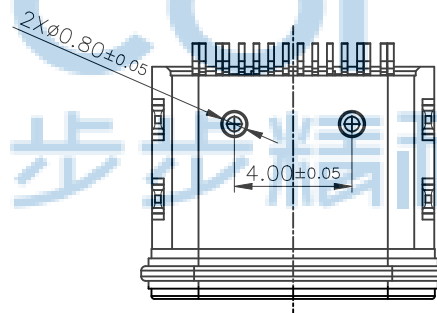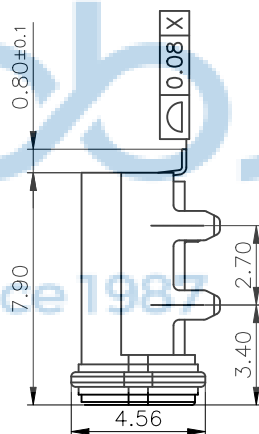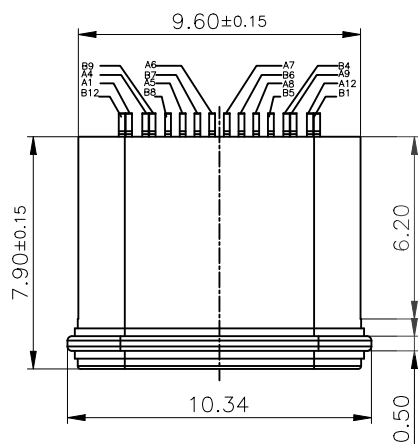


RECOMMENDED P.C.B. LAYOUT
TOLERANCE UNSPECIFIED ±0.05mm



A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION. PDWG,NO:0366-2			深圳市步步精科技有限公司			
	.X: ±0.38 .XX: ±0.25 .XXX: ±0.13		X*: ±3" .X*: ±2" .XX*: ±1"		NAME:TYPE-C 防水母座 16P 90度 板上型 四脚DIP 端子SMT L=7.90 平口 带中夹片 带柱 IPX7 编带	
	APPD.	JM_Zheng			PJ. NO.: 126-221-160006-N5G	
	CHKD.	LYX			SIZE: A4 DRW NO.:	
	DR.	GZY	FINISH: SEE NOTES		MAT'L.: SEE NOTES	
		SCALE: N/A		REV.: A0	UNIT: mm	PAGE: 1 /

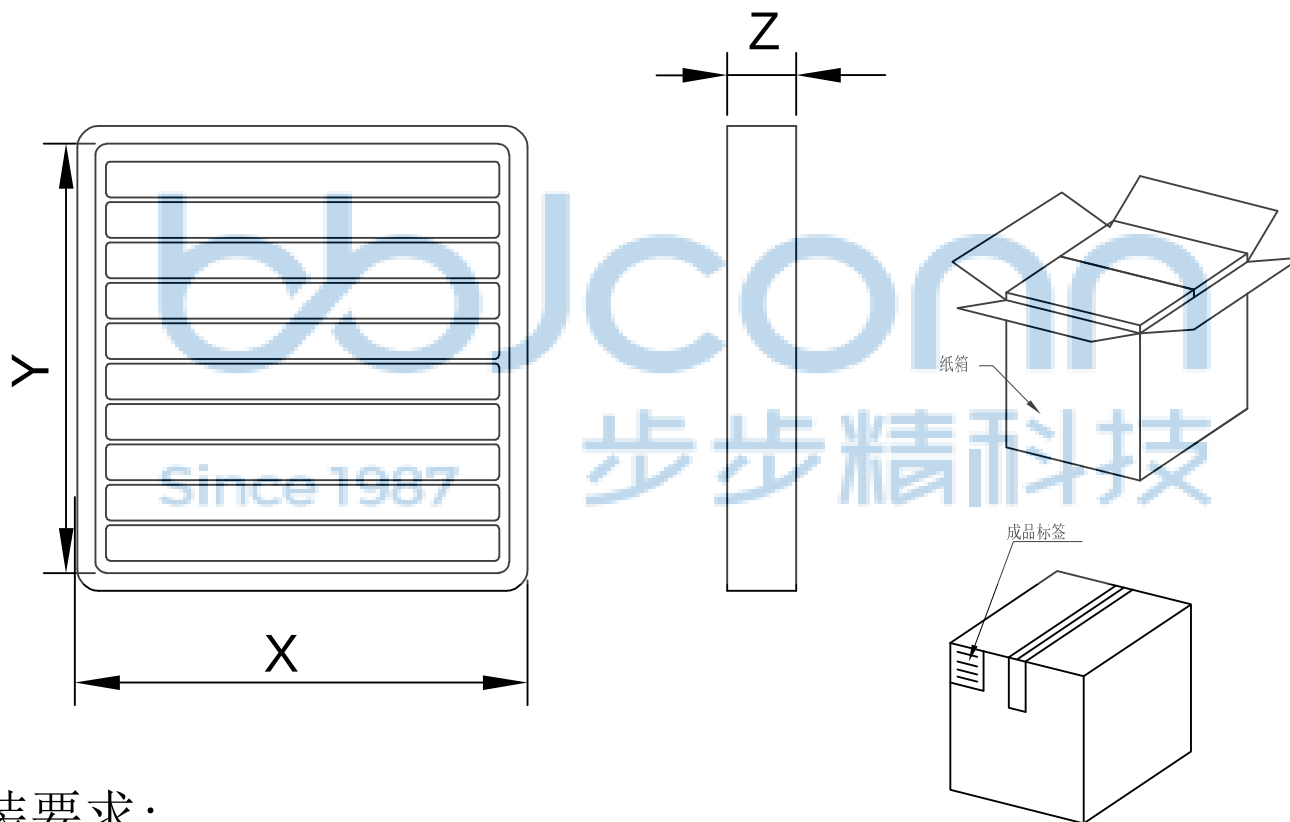

纸箱规格: 350*210*290

1. 包装要求:
- 1.1 每盒吸塑盒包装700pcs;
- 1.2 每20盘放一箱, 共计14000PCS;
- 1.3 纸箱外贴上标签。

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		 深圳市步步精科技有限公司	
.X: ±0.38 .XX: ±0.25 .XXX: ±0.13		X*: ±3" X*: ±2" XX*: ±1"	
APPD. JM_Zheng		NAME: TYPE-C 防水母座 16P 90度 板上型 四脚DIP	
CHKD. LYX		端子SMT L=7.90 平口 带中夹片 带柱 IPX7 编带	
DR. GZY		PJ. NO.: 126-221-160006-N5G	
PDWG.NO: 0366-2		SIZE: A4 DRW NO.:	
		FINISH: SEE NOTES MAT'L.: SEE NOTES	
		SCALE: N/A REV.: A0 UNIT: mm PAGE: 2/2	