
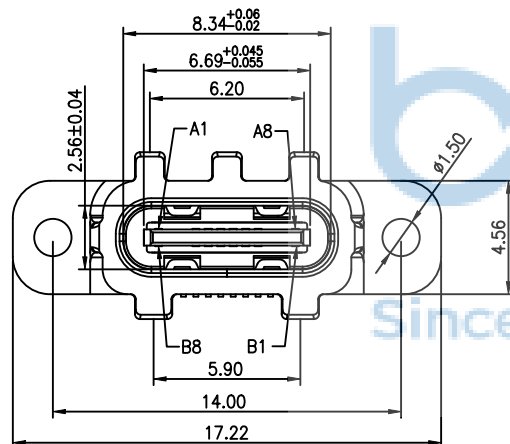
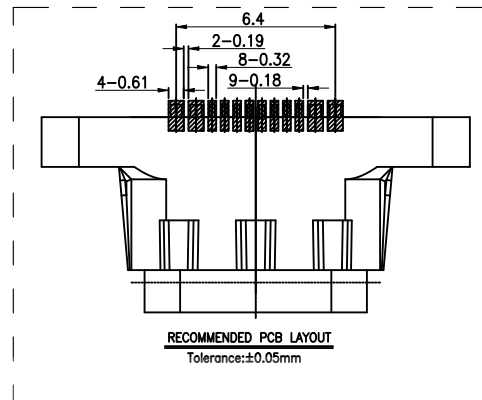
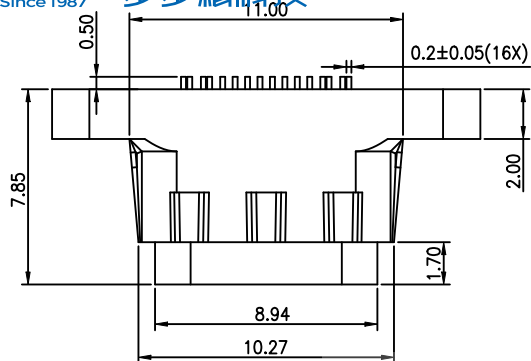


套圆型防水圈示意图

USB TYPE-C PIN ASSIGNMENTS


PIN NUMBER	SIGNAL NAME	PIN NUMBER	SIGNAL NAME
A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	Dp1	B7	Dn2
A7	Dn1	B6	Dp2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND

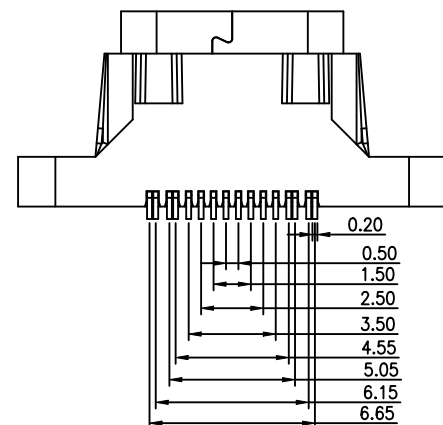

NOTES:
SPECIFICATION:

1. CURRENT RATING: 5.0A MAX
2. VOLTAGE: 30 VAC
3. TEMPERATURE RANGE: -30 °C ~ 85 °C
4. CONTACT RESISTANCE: 40 MILLIONHM MAX
5. INSULATION RESISTANCE: 100 MEGOHMS MIN.
6. LNSERTION FORCE : 6N~20N
7. UNMATING FORCE: 8N~20N
8. DURABILITY: 10,000 CYCLES
9. WATER PROOFNESS: THIS PRODUCT IS BASED ON IPX8 (1.5M 30min).

(防水等级 IPX8 1.5米 30分钟)

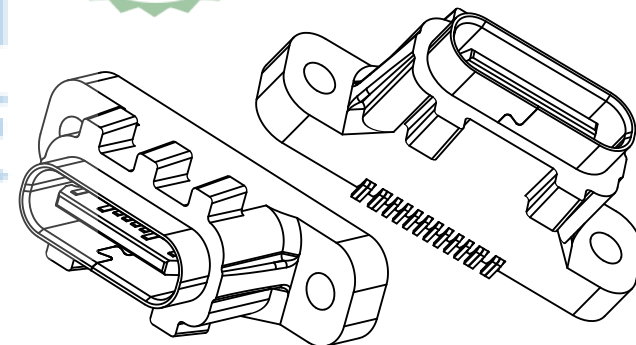

5	Run-RING	1PCS	Silica gel	BLACK
4	SHELL	1PCS	STAINLESS STEEL	NI Plated: 60u"MIN
3	CONTACT	1SET	C7025	Contact Plating: Au 1u" Soldering Plating: Au 1u"
2	SHELL HOUSING	1PCS	PA46	BLACK
1	HOUSING	1PCS	LCP	BLACK
NO	DESCRIPTION	QTY	MATERIAL	REMARKS


THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co., Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
OR IN PART WITHOUT
PRIOR WRITTEN PERMISSION.
PDWG. NO: 0541-1

.X: ±0.38 .XX: ±0.25 .XXX: ±0.13		X*: ±3" .X*: ±2" .XX*: ±1"		NAME: TYPE-C 16P 防水母座 端子SMT 锁板式 L=7.85 CH=2.38 不锈钢外壳 IPX8 O型防水圈	
APPD.	TDW			PJ. NO.: 126-221-160008-X7G	
CHKD.	LYX			SIZE: A4 DRW NO.:	
DR.	LYL			FINISH: SEE NOTES MAT'L.: SEE NOTES	
				SCALE: N/A REV.: A0 UNIT: mm PAGE: 1/3	

深圳市步步精科技有限公司




REV.	ECN NO	CONTENT	DATE	ENGINEER
A0		Initial release	/	LYL

- NOTES:
1)材质: 黑色硅胶, 防火等级UL 94V-0.
2)环保: 无卤.
3)肖氏A硬度: 60±5
4.内侧毛边0.05Max

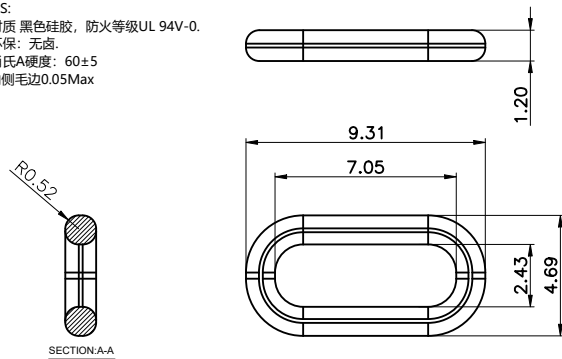

RING SIZE (REF)







Waterproof ring ASS'Y

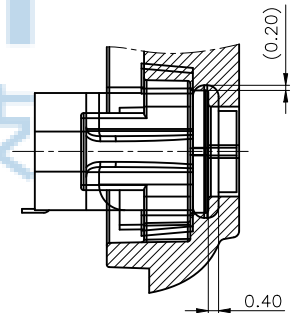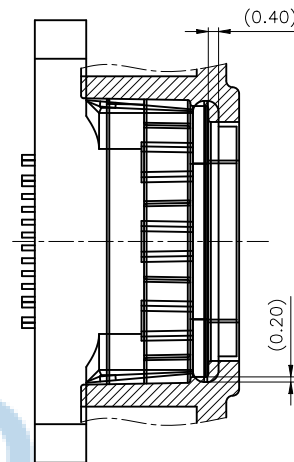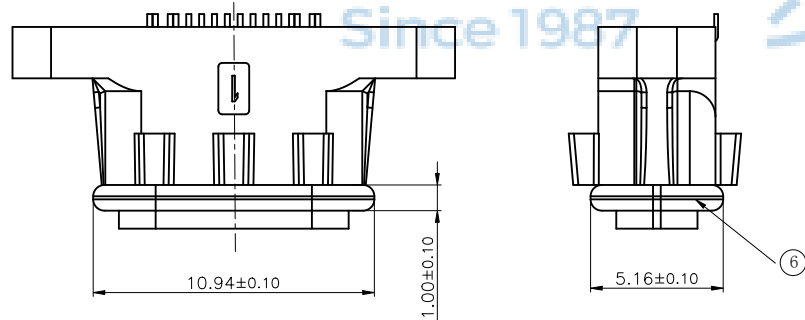

Interferebce_Fit Size



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.				深圳市步步精科技有限公司			
.X: ±0.38 .XX: ±0.25 .XXX: ±0.13		X*: ±3" .X*: ±2" .XX*: ±1"		NAME: TYPE-C 16P 防水母座 端子SMT 锁板式 L=7.85 CH=2.38 不锈钢外壳 IPX8 O型防水圈			
APPD.	TDW			PJ. NO.: 126-221-160008-X7G			
CHKD.	LYX			SIZE: A4 DRW NO.:			
DR.	LYL			FINISH: SEE NOTES MAT'L.: SEE NOTES			
PDWG.NO: 0541-1				SCALE: N/A REV.: A0 UNIT: mm PAGE: 2/3			

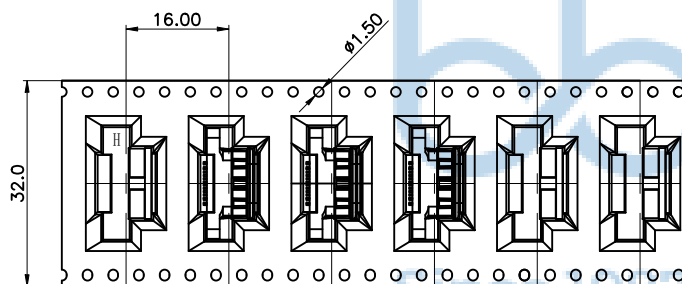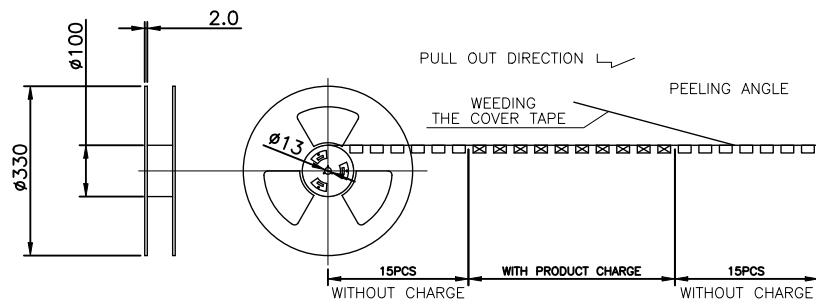

注意:

1. 材料:

纸箱:纤维板, 瓦楞, 双层壁。

胶带:聚苯乙烯, 耐热温度:120℃, 白。

卷筒:聚苯乙烯, 耐热温度:70℃, 蓝色。

包装:聚乙烯, 耐热温度:100℃。

2. 剥离强度:0.1 ~ 1.3 N(10 ~ 130克)

3. 脱皮速度:300mm /min。

4. 每个袋子都应包括干燥剂*1。

5. 外箱上贴号物料标签及RoHS标签

6. 同一产品只能装同一纸箱, 不允其它产品;

7. 包装后, 产品铆合面朝内;



NOTE:

1. QUANTITY: 600 PCS/REEL, 4200PCS/CARTON.

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co., Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司	
.X: ±0.38	.X': ±3'	NAME: TYPE-C 16P 防水母座 端子SMT 锁板式 L=7.85 CH=2.38 不锈钢外壳 IPX8 0型防水圈	
.XX: ±0.25	.X': ±2'		
.XXX: ±0.13	.XX': ±1'		
APPD.	TDW		PJ. NO.: 126-221-160008-X7G
CHKD.	LYX	SIZE: A4 DRW NO.:	
PDWG.	LYL	FINISH: SEE NOTES MAT'L.: SEE NOTES	
NO: 0541-1		SCALE: N/A	REV.: A0 UNIT: mm PAGE: 3/3