

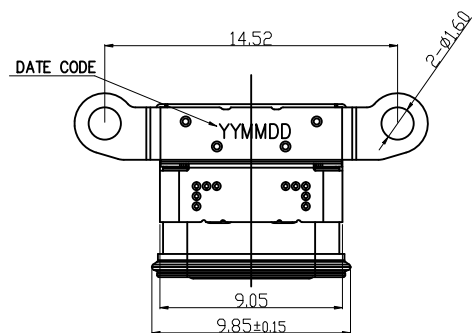
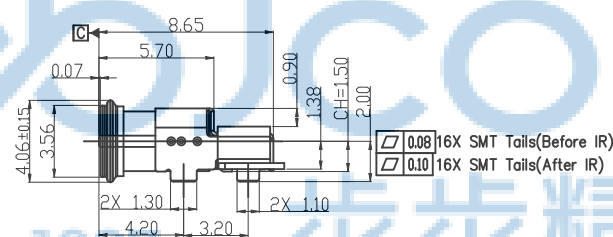
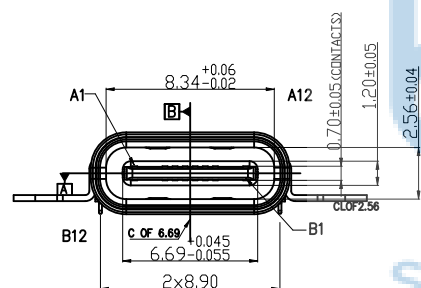
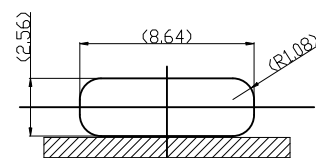


NOTES/ 注释:

1. MATERIAL / 材料: SEE TABLE / 见下表
2. GENERAL SPECIFICATION / 通用特性:
 - 2.1 COPLANARITY / 共面度: **0.10 Max.**
 - 2.2 CURRENT RATING: 5A / 额定电流: 5安培
 - 2.3 CONTACT RESISTANCE: 40mΩ MAX (INITIAL),
INSULATION RESISTANCE:100MΩ Min
接触电阻: 40毫欧最大(初始值) / 绝缘电阻: 100MΩ Min
 - 2.4 DIELECTRIC WITHSTANDING VOLTAGE: 100 VAC
耐电压: 100伏交流
 - 2.5 MECHANICAL CHARACTERISTICS:
INSERTION FORCE: 5~20N EXTRACTION FORCE: 8~20N
AFTER DURABILITY EXTRACTION FORCE: 6~20N
力学特性: 初始插入力: 5~20N 拔出力: 8~20N
耐久后拔出力: 6~20N
 - 2.6 DURABILITY: 10000 CYCLES / 耐久性: 10000次
 - 2.7 PACKAGING TYPE: CARRIER TAPE. / 包装类型: 载带包装
3. WATERPROOF CLASS IPX8 / 防水等级 IPX8

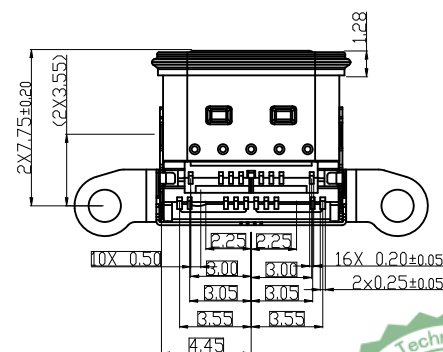

9	OUTER SHELL	1	STAINLESS STEEL	CLEAN
8	LIM	1	CHN-IMS-50-A/B	BLACK
7	SMALL SHELL	1	STAINLESS STEEL	CLEAN
6	MAIN SHELL	1	STAINLESS STEEL	CLEAN
5	SUB-SHELL	1	STAINLESS STEEL	Solser Nickel: 50U/ MIN
4	TOP TERMINAL	1	COPPER ALLOY	SEE NOTES
3	BOTTOM TERMINAL	1	COPPER ALLOY	SEE NOTES
2	MID PLATE	1	STAINLESS STEEL	NICKEL: 50U/ MIN
1	MAIN HOUSING	1	high temperature plastic	BLACK
ITEM	DESCRIPTION	Q'TY	MATERIAL	FINISH
BILL OF MATERIAL				

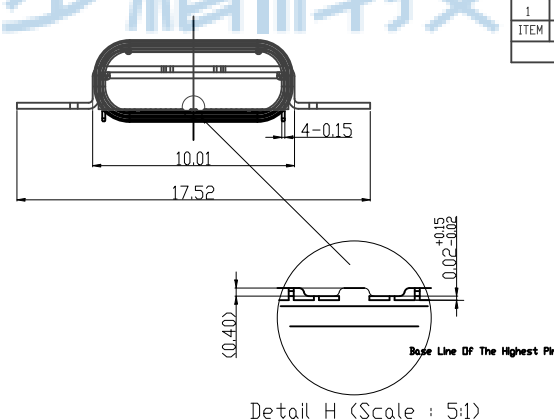

REF. PANEL DESIGN

Pin No	Signal Name	Mating Sequence	Pin No	Signal Name	Mating Sequence
A1	GND	First	B12	GND	First
A4	V _{bus}	First	B9	V _{bus}	First
A5	CC1	Second	B8	SBU2	Second
A6	D+	Second	B7	D-	Second
A7	D-	Second	B6	D+	Second
A8	SBU1	Second	B5	CC2	Second
A9	V _{bus}	First	B4	V _{bus}	First
A12	GND	First	B1	GND	First
SHELL	GND		SHELL	GND	



THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
OR IN PART WITHOUT
PRIOR WRITTEN PERMISSION.

PDWG,NO: 0541-1

 深圳市步步精科技有限公司

.X: ± 0.38	X*: $\pm 3^\circ$
.XX: ± 0.25	.X*: $\pm 2^\circ$
.XXX: ± 0.13	.XX*: $\pm 1^\circ$

NAME: TYPE-C 16P 防水 母座 端子SMT
四脚插 锁板式 L=8.65 CH=1.50 IPX8 编带

APPD.	JM_Zheng
-------	----------

	PJ. NO.: 126-221-160012-X7G
---	-----------------------------





N. CHKD. LYX

	SIZE: A4	DRW NO.:

DR.	ZY
-----	----

FINISH: SEE NOTES	MAT'L.: SEE NOTES
-------------------	-------------------

SCALE: N/A	REV.: A0	UNIT: mm	PAGE: 1/2
------------	----------	----------	-----------

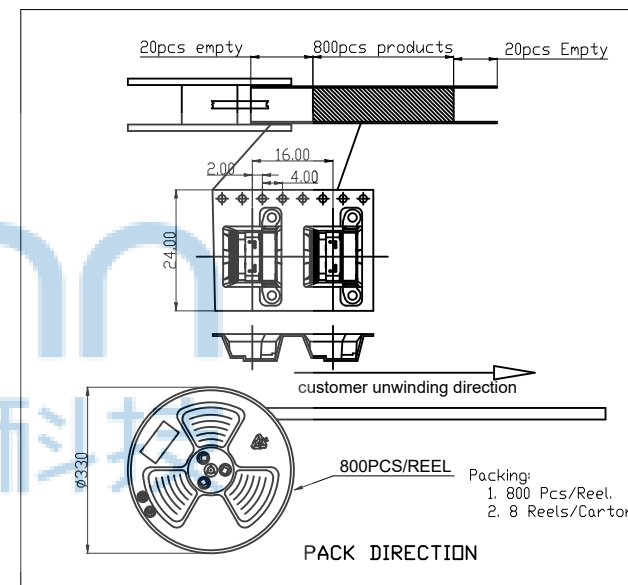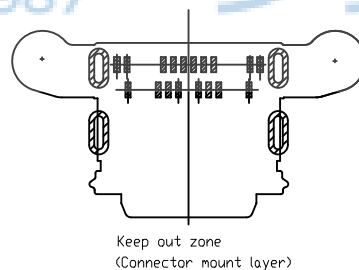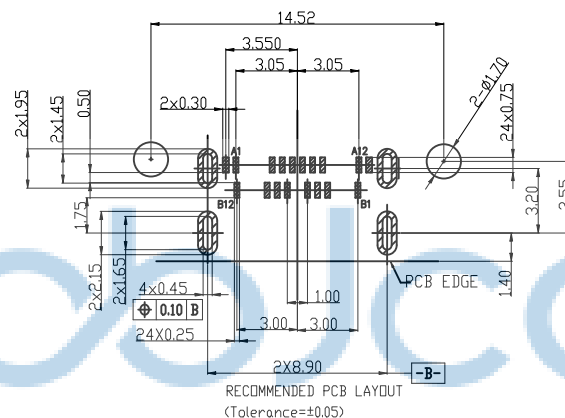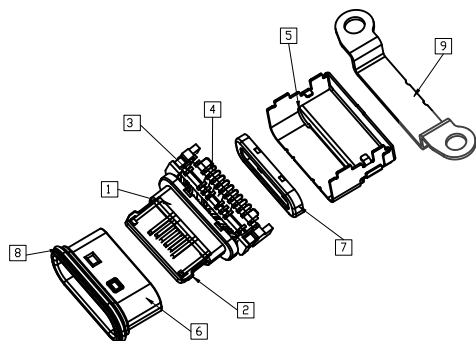

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
OR IN PART WITHOUT
PRIOR WRITTEN PERMISSION.
PDWG.NO: 0541-1

深圳市步步精科技有限公司		NAME: TYPE-C 16P 防水 母座 端子SMT 四脚插 锁板式 L=8.65 CH=1.50 IPX8 编带	
.X: ±0.38 .XX: ±0.25 .XXX: ±0.13	X': ±3" .X': ±2" .XX': ±1"	PJ. NO.: 126-221-160012-X7G	SIZE: A4 DRW NO.:
APPD. JM_Zheng	CHKD. LYX	FINISH: SEE NOTES	MAT'L.: SEE NOTES
DR. ZY		SCALE: N/A	REV.: A0 UNIT: mm PAGE: 2/2