bbJconn
Since 1987 步步精科技

REV.	ECN NO	CONTENT	DATE	ENGINEER
A0		Initial release	/	TSP

NOTES:
SPECIFICATION:
1. CURRENT RATING: 3.0A MAX
2. VOLTAGE: 100 VAC
3. TEMPERATURE RANGE: −30 °C ~ 85 °C
4. CONTACT RESISTANCE: 40 MILLIONHM MAX
5. INSULATION RESISTANCE: 100 MEGOHMS MIN.
6. LNSERTION FORCE : 5N~20N
7. UNMATING FORCE: 8N~20N
8. DURABILITY: 10,000 CYCLES

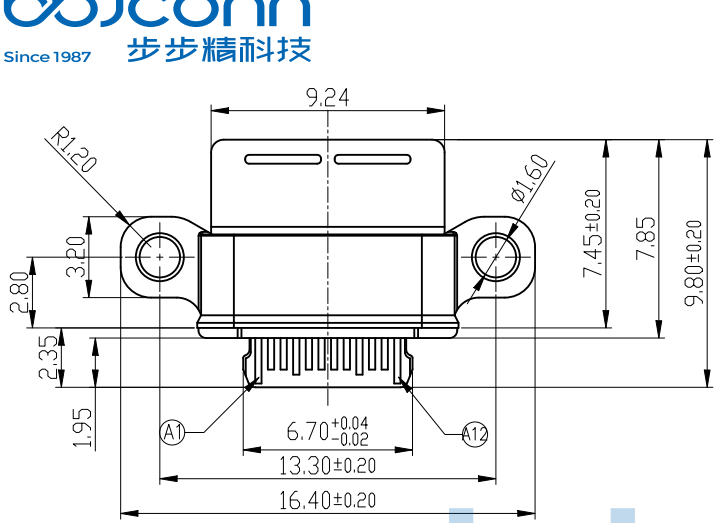

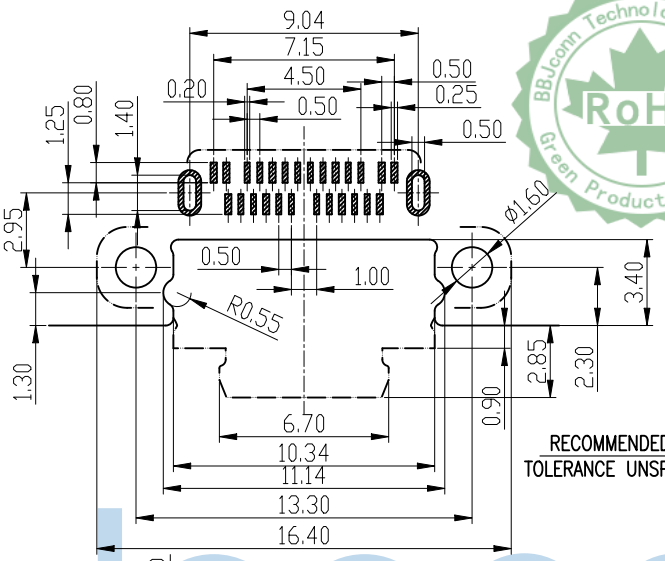

RECOMMENDED P.C.B. LAYOUT
TOLERANCE UNSPECIFIED ±0.05mm

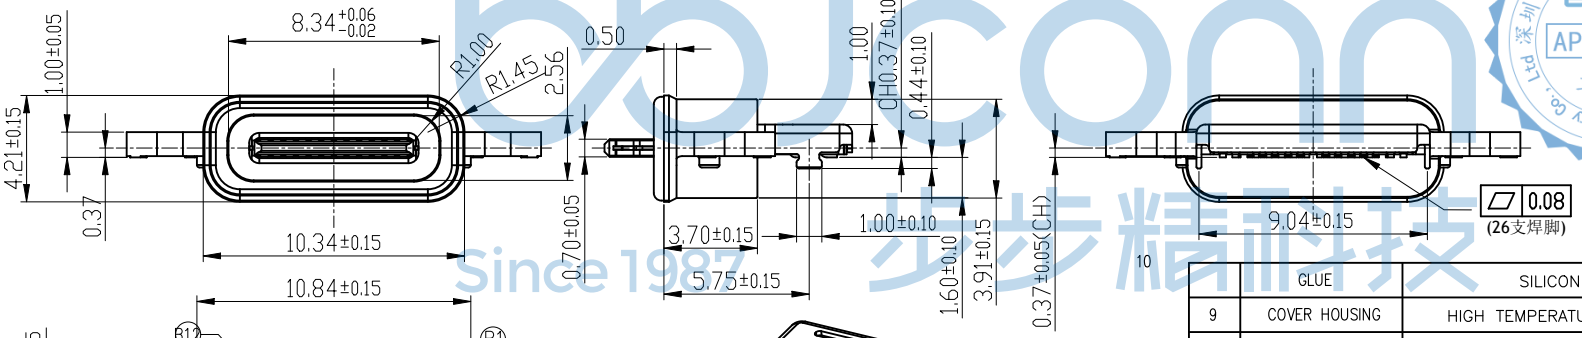

Pin	Name	Pin	Name
A1	GND	B12	GND
A2	SSTXp1	B11	SSRXp1
A3	SSTXn1	B10	SSRXn1
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	Dp1	B7	Dn2
A7	Dn1	B6	Dp2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A10	SSRXn2	B3	SSTXn2
A11	SSRXp2	B2	SSTXp2
A12	GND	B1	GND

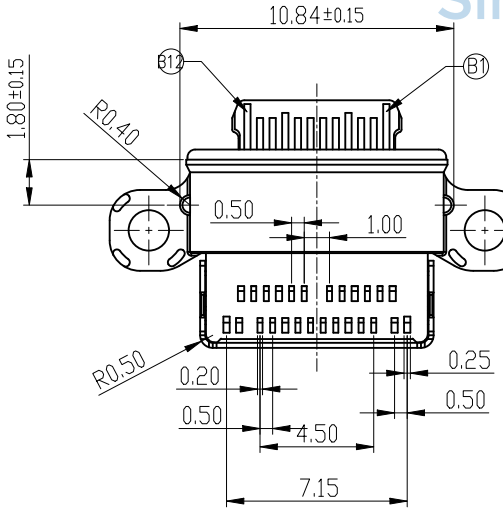

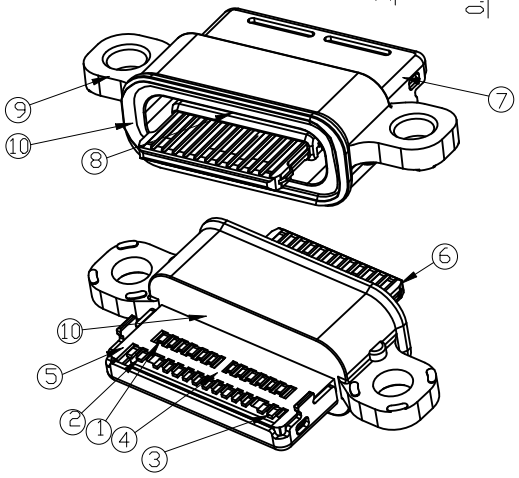

NO.	DESCRIPTION	MATERIAL	REMARKS	QTY
	GLUE	SILICONE	UL 94V-0	1PCS
9	COVER HOUSING	HIGH TEMPERATURE PLASTIC	BLACK	1PCS
8	LATCH PLATE	STAINLESS STEEL	NI Plated	1PCS
7	SHELL PLATE	STAINLESS STEEL	TI/NI Plated	1PCS
6	OVER MOLDING	HIGH TEMPERATURE PLASTIC	BLACK	1PCS
5	TOP CONTACT I/M	HIGH TEMPERATURE PLASTIC	BLACK	1PCS
4	BOTTOM CONTACT I/M	HIGH TEMPERATURE PLASTIC	BLACK	1PCS
3	MID PLATE	STAINLESS STEEL	TI/NI Plated	1PCS
2	CONTACT	COPPER ALLOY	Au/NI Plated	1SET
1	CONTACT	COPPER ALLOY	Au/NI Plated	1SET

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.

PDWG,NO: 0523-1

深圳市步步精科技有限公司

.X: ±0.38 X°: ±3°
.XX: ±0.25 .X°: ±2°
.XXX: ±0.13 .XX°: ±1°

NAME: TYPE-C (Mate20) 24P 防水母座 锁板式 双排SMT
沉板1.60 舌片外露1.95 L=7.85 CH=0.37 IPX8 编带

APPD.	JM_Zheng
CHKD.	LYX
DR.	TSP

PJ. NO.: 126-221-240001-U9G
SIZE: A4 DRW NO.:
FINISH: SEE NOTES MAT'L.: SEE NOTES
SCALE: N/A REV.: A0 UNIT: mm PAGE: 1/2

REV.	ECN NO	CONTENT	DATE	ENGINEER
A0		Initial release	/	TSP

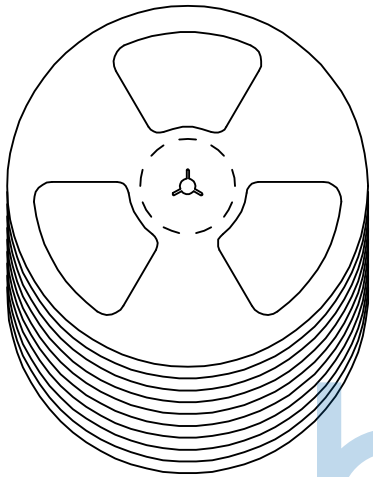



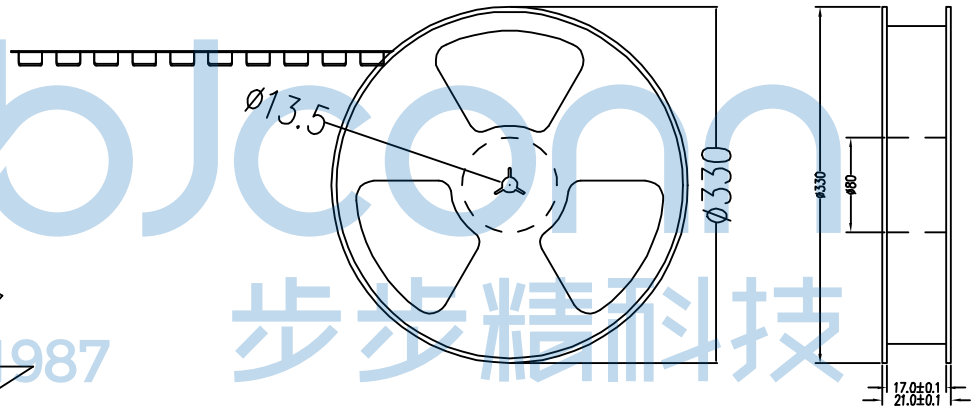

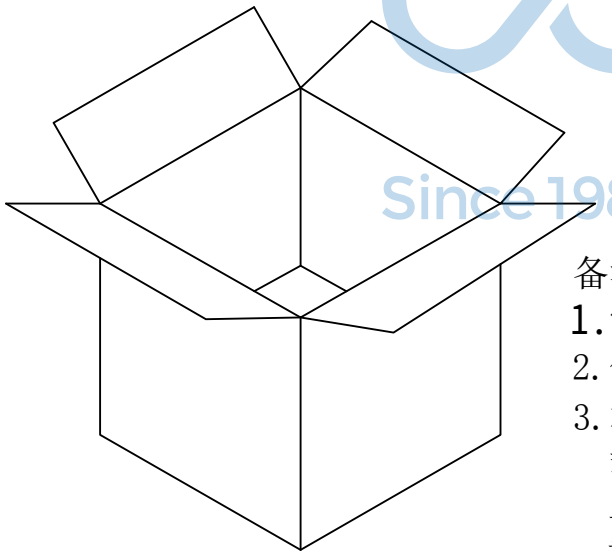

备注：

1.包装数量：650/PCS/卷，10卷/箱

2. 包装袋长度：每卷前后各空10-20个空格，中间包装。

3. 材质：

载体：聚丙烯（PS），

上带：聚乙烯（PET），

卷盘：聚苯乙烯。

纸箱规格：345*345*23MM

纸箱规格：345*345*35MM

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.

PDWG,NO:

深圳市步步精科技有限公司

.X: ±0.38 X°: ±3°
.XX: ±0.25 .X°: ±2°
.XXX: ±0.13 .XX°: ±1°

APPD. JM_Zheng

CHKD. LYX

DR. TSP

NAME: TYPE-C (Mate20) 24P 防水母座 锁板式 双排SMT 沉板1.60 舌片外露1.95 L=7.85 CH=0.37 IPX8 编带

PJ. NO.: 126-221-240001-U9G

SIZE: A4 DRW NO.:

FINISH: SEE NOTES MAT'L.: SEE NOTES

SCALE: N/A REV.: A0 UNIT: mm PAGE: 2/2