

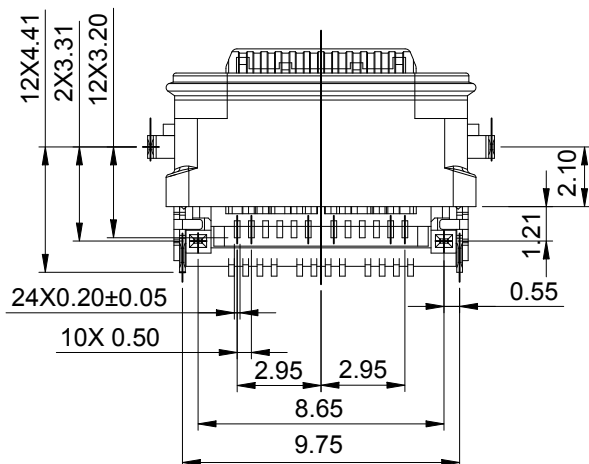
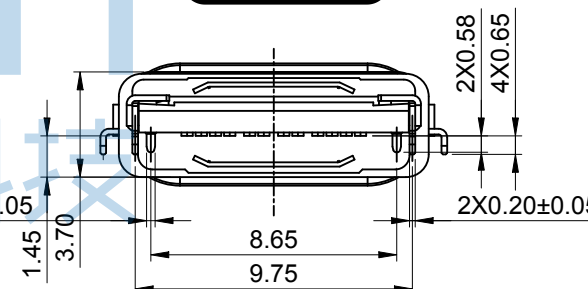
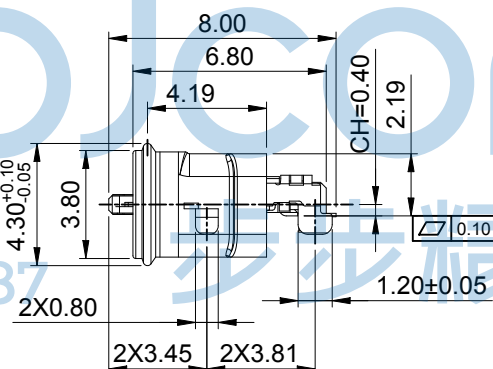
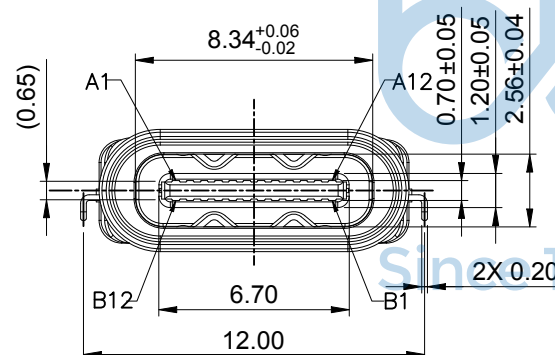


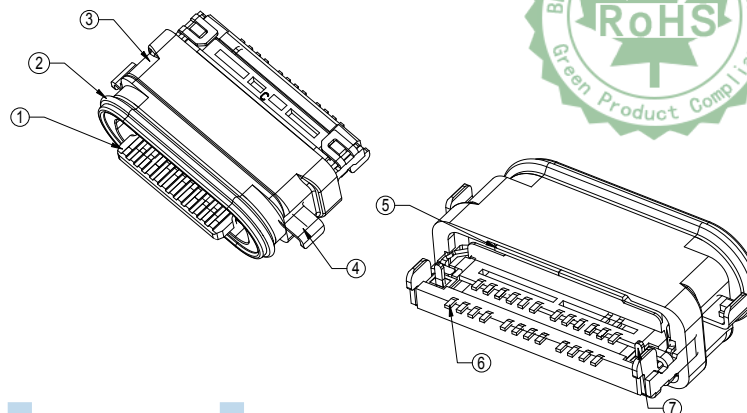

REV.	ECN NO.	CONTENT	DATE	ENGINEER
A0		Initial release	/	TSP

注释:

- 材料: 见材料清单
- 通用特性:
 - 共面度: 0.10 Max.
 - 额定电流: 5A
 - 接触电阻: 40Ω Min/ 绝缘电阻: 100MΩ Min
 - 耐电压: 100伏交流
 - 力学特性: 初始插入力: 5~20N 拔出力: 8~20N
 - 耐久后拔出力: 6~20N
 - 耐久性: 10000次
- 防水等级 IPX8

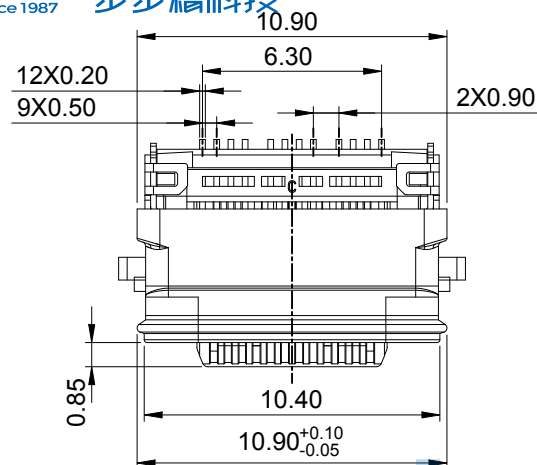


7	MID PLATE	1	STAINLESS STEEL	SOLDER NICKEL: 50U" MIN
6	TERMINAL	1	C18400	MATING SIDE: AU15U"; SOLDER TAIL: GOLD FLASH, 50u" NICKEL OVERALL.
5	SHELL	1	STAINLESS STEEL	SOLDER NICKEL: 50U" MIN
4	SOLDER PIN	1	STAINLESS STEEL	SOLDER NICKEL: 50U" MIN
3	SHELL HOUSING	1	High-TEMP. PLASTIC	BLACK
2	LIM	1	SILICA GEL	BLACK
1	MAIN HOUSING	1	High-TEMP. PLASTIC	BLACK
ITEM	DESCRIPTION	Q'TY	MATERIAL	FINISH

BILL OF MATERIAL



THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
OR IN PART WITHOUT
PRIOR WRITTEN PERMISSION.
PDWG.NO: 0541-1

.X: ±0.38 X': ±3" .XX: ±0.25 .X': ±2" .XXX: ±0.13 .XX': ±1"		NAME: TYPE-C 24P 防水母座 沉板1.45 双排SMT 四脚插 舌片外露0.85 L=6.80 CH=0.40 IPX8 编带	
APPD.	JM_Zheng	P.J. NO.: 126-221-240006-X7G SIZE: A4 DRW NO.:	FINISH: SEE NOTES MAT'L.: SEE NOTES
CHKD.	LYX		
DR.	TSP	SCALE: N/A REV.: A0 UNIT: mm	PAGE: 1/3

深圳市步步精科技有限公司

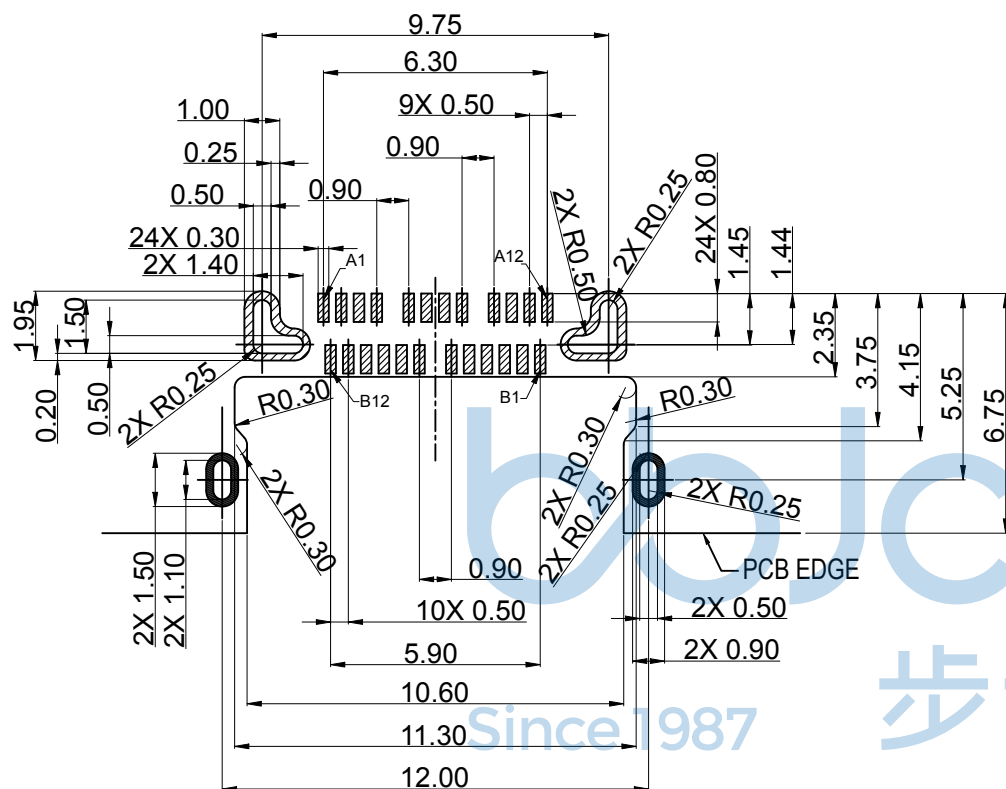

RECOMMENDED PCB LAYOUT
(Tolerance= ± 0.05)

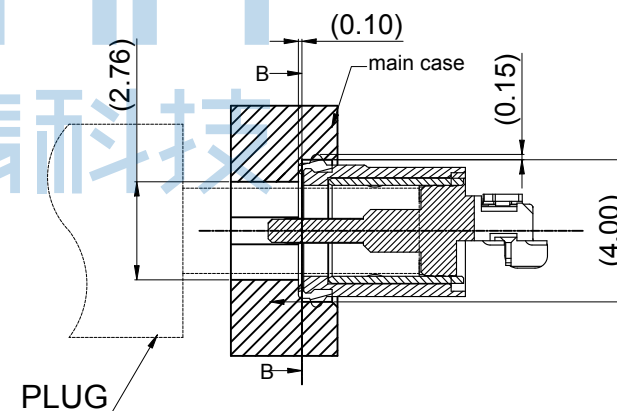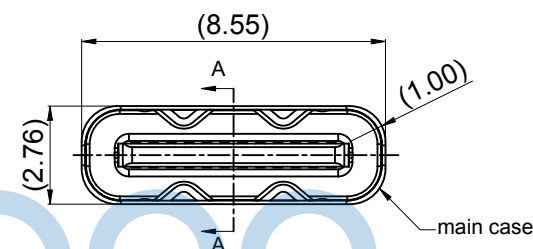

SECTION A-A
PANEL CUT-OUT REFERENCE

Pin:

A1	A2	A3	A4	A5	A6	A7	A8	A9	A10	A11	A12
GND	TX1+	TX1−	Vbus	CC1	D+	D−	SBU1	Vbus	RX2−	RX2+	GND
GND	RX1+	RX1−	Vbus	SBU2	D−	D+	CC2	Vbus	TX2−	TX2+	GND
B12	B11	B10	B9	B8	B7	B6	B5	B4	B3	B2	B1



THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd
Corporation AND SHOULD
NOT BE USED IN ANY




深圳市步步精科技有限公司

.X: ±0.38 X: ±3"		NAME:TYPE-C 24P 防水母座 沉板1.45 双排SMT 四脚插 舌片外露0.85 L=6.80 CH=0.40 IPX8 编带			
.XX: ±0.25 .X: ±2"					
.XXX: ±0.13 .XX: ±1"					
APPD.	JM_Zheng		PJ. NO.: 126-221-240006-X7G		
CHKD.	LYX		SIZE: A4 DRW NO.:		
DR.	TSP	FINISH: SEE NOTES		MAT'L.: SEE NOTES	
		SCALE:N/A	REV.: A0	UNIT: mm	PAGE: 2/3

REV.	ECN NO.	CONTENT	DATE	ENGINEER
A0		Initial release	/	TSP

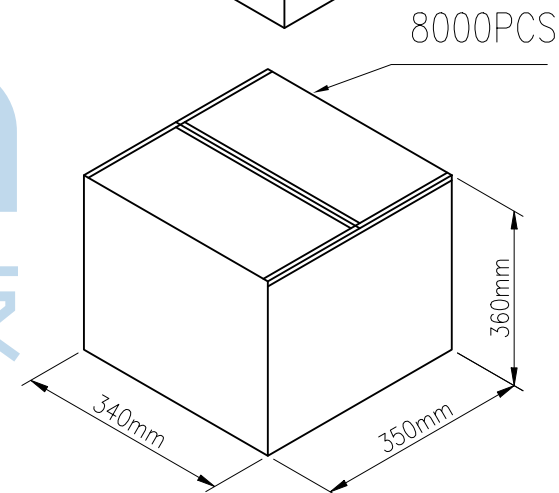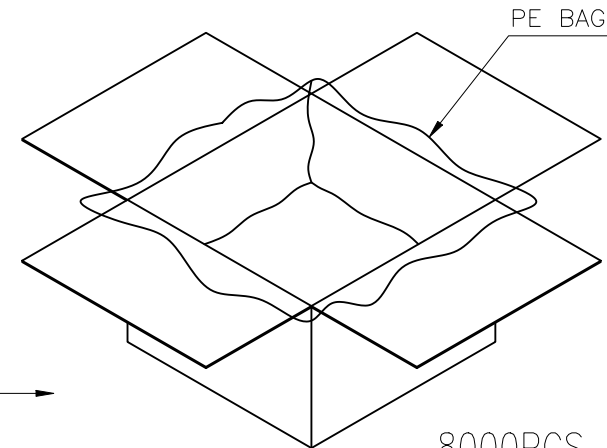

外包装箱规格

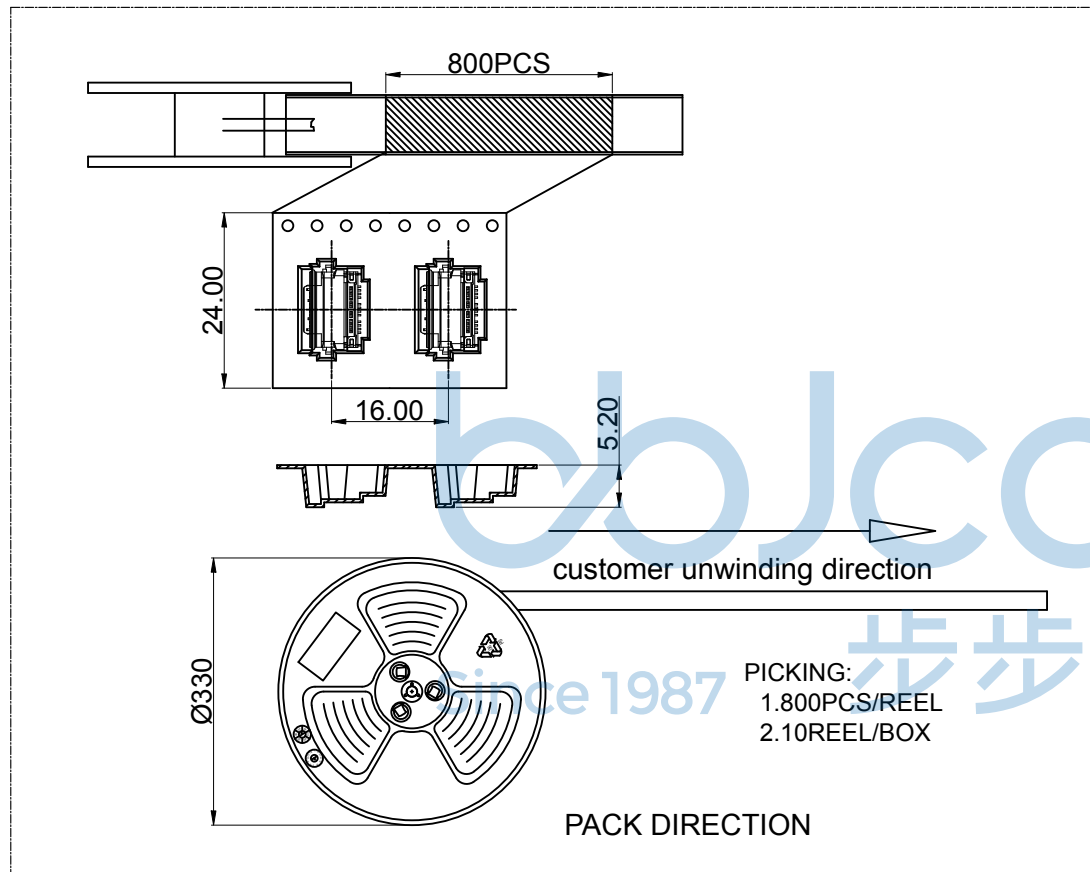

PICKING:
1.800PCS/REEL
2.10REEL/BOX

PACK DIRECTION



	REEL	CARTON
CONNECTOR (PCS)	800	9600

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.			深圳市步步精科技有限公司		
.X: ±0.38 .XX: ±0.25 .XXX: ±0.13		X': ±3" .X': ±2" .XX': ±1"		NAME: TYPE-C 24P 防水母座 沉板1.45 双排SMT 四脚插 舌片外露0.85 L=6.80 CH=0.40 1PX8 编带	
APPD. JM_Zheng		CHKD. LYX		P.J. NO.: 126-221-240006-X7G	
PDWG.NO: 0541-1		DR. TSP		SIZE: A4 DRW NO.:	
				FINISH: SEE NOTES MAT'L.: SEE NOTES	
				SCALE: N/A REV.: A0 UNIT: mm PAGE: 3/3	