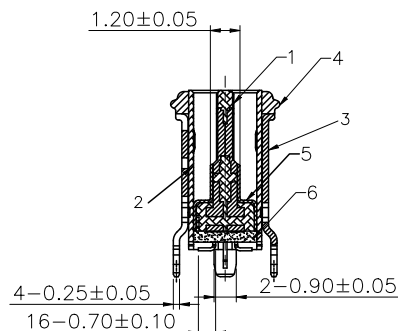


3D VIEW

技术参数pecifications:

1. 电气特性:Electrical:

1.1 额定电流: Current Rating

3.0A/contact terminal

1.2 额定电压: Voltage Rating

30V Max

1.3 接触阻抗: Contact Resistance

40 mΩ MAX

1.4耐电压:Dielectnic Withstanding Voitage:

100 V AC, 60s, 10mA

1.5绝缘阻抗:Insulation Resistance:

100M Ω MIN

1.6工作温度: Operating Temperature: $-40^{\circ}\text{C}\sim+85^{\circ}\text{C}$.

1.7 喷雾实验: 48H Min

2. 机械性能: Mechanical:






2.1插拔力: Cnnector Mate and Unmate Force

Mate force: 5~20N

Unmate force: 6~20N

2.2耐久性: Durability:10000 Cycles

2.3等级: IPX8

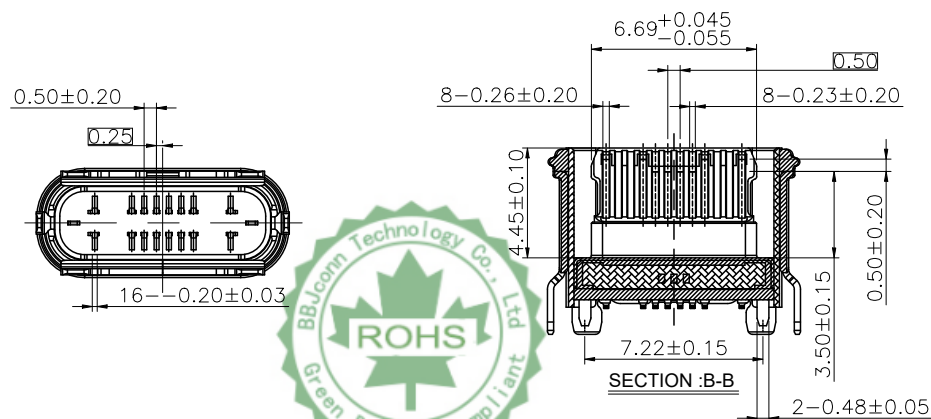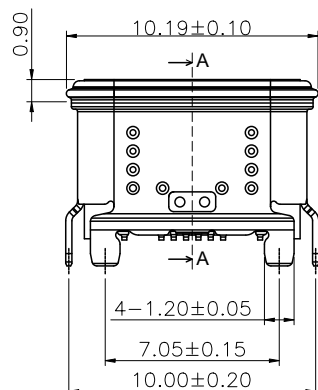

序号	产品名称	材料规格	表面处理/颜色	数量
1	MD	胶芯: PA46	黑色	1
		端子: C18400	镀镍	1
		中夹片: 不锈钢	/	1
2	内壳	不锈钢	/	1
3	外壳	不锈钢	镀镍	1
4	限位环	硅胶	/	1
5	EMC	不锈钢	镀镍	1
6	胶水	环氧树脂	黑色	1

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
PRIOR WRITTEN PERMISSION.

PDWG NO: 0956-1



深圳市步步精科技有限公司

.X: ± 0.38	X*: $\pm 3^*$
.XX: ± 0.25	.X*: $\pm 2^*$
.XXX: ± 0.13	.XX*: $\pm 1^*$

NAME: TYPE-C 16P 母座 直立式 六脚插 H=6.50
端子SMT 防水IPX8 编带

APPD	JM_Zheng
------	----------

	PJ NO: 126-224-160002-J8G
---	---------------------------

CHKD	LYX
------	-----


	SIZE:A4	DRW NO:

DR	SGF
----	-----

FINISH:SEE NOTES	MAT'L:SEE NOTES
------------------	-----------------

SCALE:N/A	REV:A0	UNIT:mm	PAGE:1 / 3
-----------	--------	---------	------------


7	0
---	---

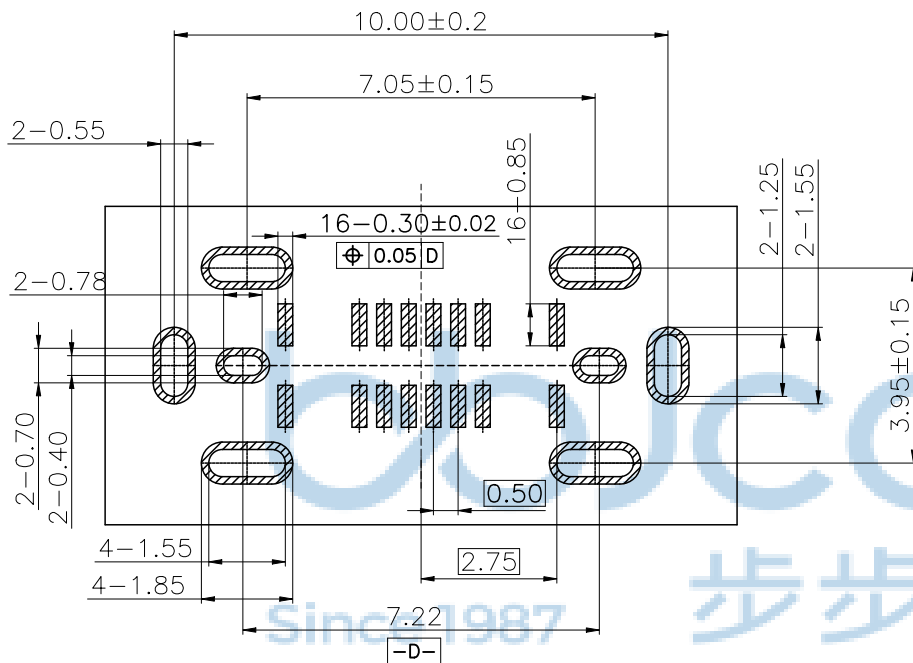

RECOMMENDED PCB LAYOUT (SCALE 2:1)
TOLERANCE UNSPECIFIED $\pm 0.05\text{mm}$

USB TYPE-C FULL-FEATURED RECEPTACLE
INTERFACE PIN ASSIGNMENTS

PIN	Signal Name	Description	PIN	Signal Name	Description
A1	GND	Ground return	B12	GND	Ground return
A2					
A3					
A4	VBUS	Bus Power	B9	VBUS	Bus Power
A5	CC1	Configuration Channel	B8	SBU2	Sideband Use (SBU)
A6	Dp1	Positive half of the USB 2.0 differential pair-Position 1	B7	Dn2	Negative half of the USB 2.0 differential pair-Position 2
A7	Dn1	Negative half of the USB 2.0 differential pair-Position 1	B6	Dp2	Positive half of the USB 2.0 differential pair-Position 2
A8	SBU1	Sideband Use (SBU)	B5	CC2	Configuration Channel
A9	VBUS	Bus Power	B4	VBUS	Bus Power
A10			B3	SSTXn2	
A11			B2	SSTXp2	
A12	GND	Ground return	B1	GND	Ground return



THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
PRIOR WRITTEN PERMISSION.

PDWG NO: 0956-1

深圳市步步精科技有限公司

.X: ± 0.38 .X': $\pm 3'$
.XX: ± 0.25 .X': $\pm 2'$
.XXX: ± 0.13 .X': $\pm 1'$

APPD JM_Zheng

CHKD LYX

DR SGF






NAME: TYPE-C 16P 母座 直立式 六脚插 H=6.50
端子SMT 防水IPX8 编带

PJ NO: 126-224-160002-J8G

SIZE:A4 DRW NO:

FINISH:SEE NOTES MAT'L:SEE NOTES

SCALE:N/A REV:A0 UNIT:mm PAGE:2/3

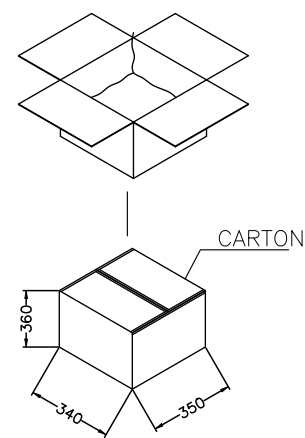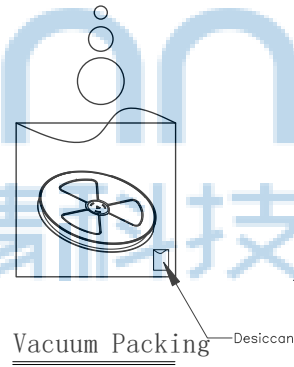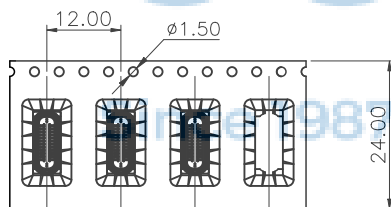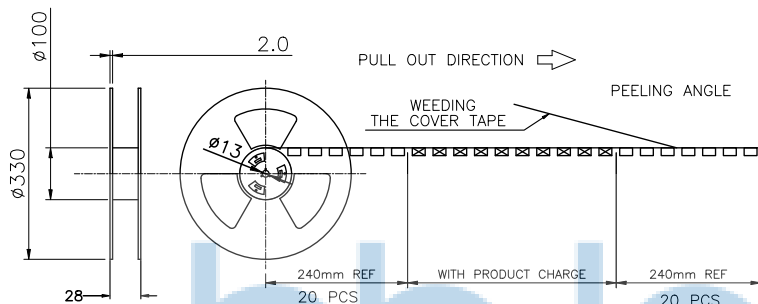

- 备注:
1. 包装数量: 600PCS/REEL, 10 REEL/CARTON, 共6000PCS.
 2. 材料: 纸箱: 纤维板, 瓦楞, 双层壁.
 3. 载带剥离强度: 0.1 ~ 1.3 N(10 ~ 130克)
 4. 脱皮速度: 300mm /min。
 5. 外箱上贴号物料标签及RoHS标签
 6. 同一产品只能装同一纸箱, 不允其它产品;
 7. 每个袋子都应包括干燥剂*1

	REEL	CARTON
CONNECTOR (PCS)	600	6000

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司	
.X: ± 0.38 .XX: ± 0.25 .XXX: ± 0.13		X': $\pm 3'$ X'': $\pm 2'$.XX': $\pm 1'$	
APPD	JM_Zheng	NAME: TYPE-C 16P 母座 直立式 六脚插 H=6.50 端子SMT 防水IPX8 编带	
CHKD	LYX	PJ NO: 126-224-160002-J8G SIZE:A4 DRW NO:	
PDWG NO: 0956-1	DR	SGF	FINISH:SEE NOTES SCALE:N/A REV:A0 MAT'L:SEE NOTES UNIT:mm PAGE:3/3