

REV.	ECN NO	CONTENT	DATE	ENGINEER
A0		Initial release	/	TSP

NOTE:

1. MATERIAL:

- 1.1 INSULATOR: HIGH TEMPERATURE PLASTIC UL 94 V-0; Black Color
- 1.2 CONTACT: C7025 (T=0.12mm)
- 1.3 SHELL: STAINLESS STEEL (T=0.40mm)
- 1.4 MID PLATE: STAINLESS STEEL (T=0.15mm)

2. ELECTRICAL CHARACTERISTICS:

2.1 CONTACT RESISTANCE: 40mΩ Max FOR INITIAL. 10mΩ CHANGE AFTER TEST. MEASURE AT 20mV, 100mA.

2.2 CONTACT CURRENT RATING: 5A FOR COLLECTIVELY POWER SUPPLY PIN (PIN1, A4, A9, A12, B1, B4, B9, B12); 1.25A FOR VCONN PIN; 0.25A FOR OTHER SIGNAL PIN.

2.3 DIELECTRIC WITHSTANDING VOLTAGE: 100V AC R. M. S.

2.4 INSULATION RESISTANCE 100MΩ Min

2.5 OPERATING TEMPERATURE: -40° C ~ 85° C

3. MECHANICAL CHARACTERISTICS:

3.1 MATING FORCE: 5~20 N.

3.2 UNMATED FORCE: 8~20N INITIAL TEST; 6~20N DURABILITY AFTER TEST









3.3 DURABILITY: 10,000 CYCLES

4. PLATING

4.1 TERMINAL CONTACT: Au 3u' PLATING ON CANTACT AREA; 焊脚镀金G/F 镍底50u"min

4.2 SHELL: 50u" Min. NICKEL ALL OVER,

4.3 MID PLATE: CLEAN

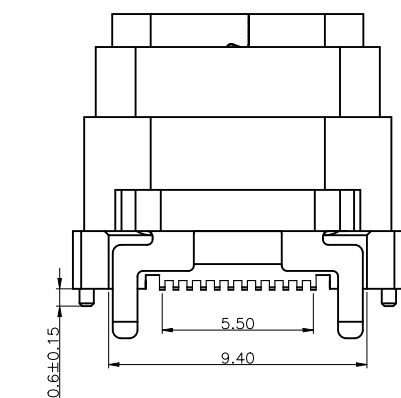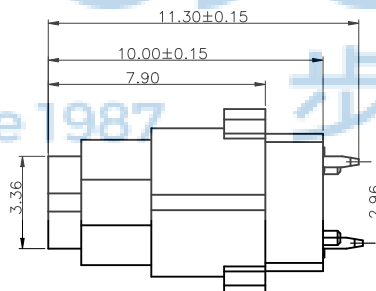
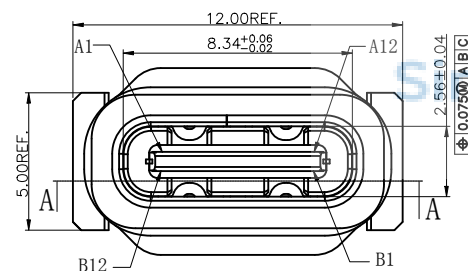
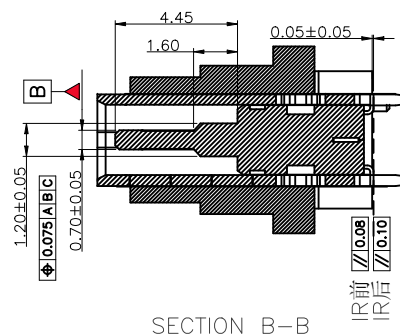
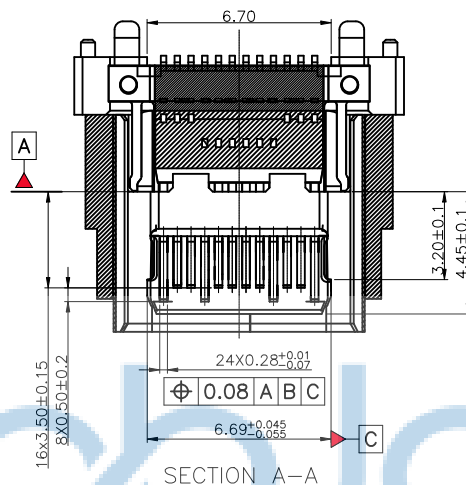
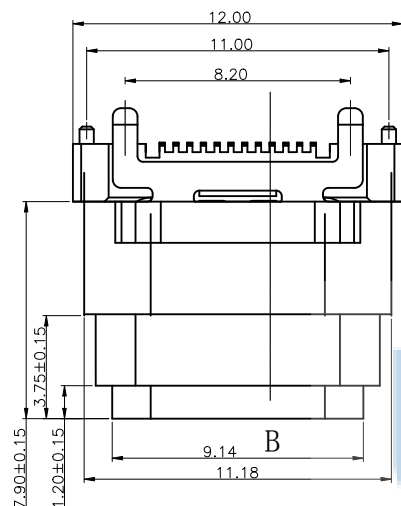


5	CAP	LCP 6007AS UL94V-0	BLACK	1PCS		
4	SHELL	SUS304 T=0.40mm	Ni 50u" Min Plated	1PCS		
3	LATCH	SUS301-H T=0.15mm	NO PLATED	1PCS	48H	Reel
2	CONTACT	C7025 T=0.12mm	Au 3u" PLATING ON CANTACT AREA; TIN 50u" Min TING ON SOLDER TAIL; Ni 50u" Min UNDERPLATING OVERALL	1SET		
1	HOUSING	LCP UL94V-0	LCP BLACK UL94V-0	1PCS		
NO.	DESCRIPTION	MATERIAL	REMARKS	QTY	盐雾	PACKAGING

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co., Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		PDWG.NO: 0541-1		深圳市步步精科技有限公司 .X: ±0.38 .X': ±3" .XX: ±0.25 .X": ±2" .XXX: ±0.13 .X": ±1"		NAME: TYPE-C 24P 防水母座 直立式加宽 SMT 四脚插 脚长1.3 带柱 H=10.0 IPX8 方形防水圈	
APPD.	JM_Zheng	PJ. NO.: 126-224-240002-X7G		SIZE: A4 DRW NO.:		FINISH: SEE NOTES MAT'L.: SEE NOTES	
CHKD.	LYX	SCALE: N/A		REV.: A0		UNIT: mm	
DR.	TSP					PAGE: 1/4	


USB TYPE-C FULL-FEATURED RECEPTACLE INTERFACE PIN ASSIGNMENTS

PIN	Signal Name	Description	PIN	Signal Name	Description
A1	GND	Ground return	B12	GND	Ground return
A4	VBUS	Bus Power	B9	VBUS	Bus Power
A5	CC1	Configuration Channel	B8	SBU2	Sideband Use (SBU)
A6	Dp1	Positive half of the USB 2.0 differential pair-Position 1	B7	Dn2	Negative half of the USB 2.0 differential pair-Position 2
A7	Dn1	Negative half of the USB 2.0 differential pair-Position 1	B6	Dp2	Positive half of the USB 2.0 differential pair-Position 2
A8	SBU1	Sideband Use (SBU)	B5	CC2	Configuration Channel
A9	VBUS	Bus Power	B4	VBUS	Bus Power
A12	GND	Ground return	B1	GND	Ground return

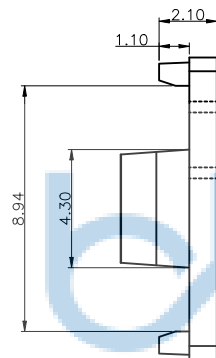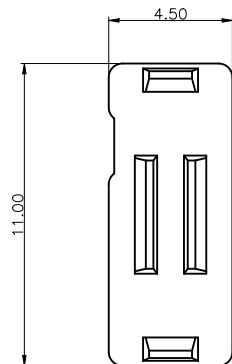

ENCLOSURE(REF.)

Waterproof ring


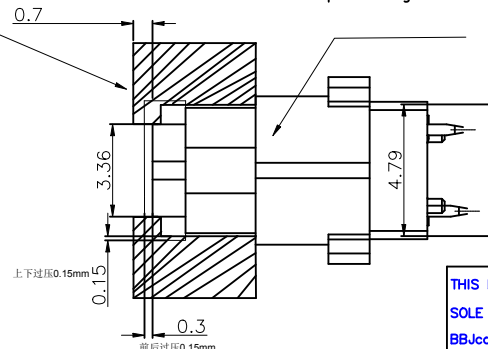


套防水圈示意图



加CAP示意图



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co., Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司	
PDWG.NO: 0541-1	NAME: TYPE-C 24P 防水母座 直立式加宽 SMT 四脚插 脚长1.3 带柱 H=10.0 IPX8 方形防水圈	APPD. JM_Zheng	PJ. NO.: 126-224-240002-X7G
CHKD. LYX	SIZE: A4 DRW NO.:	DR. TSP	MAT'L.: SEE NOTES
	FINISH: SEE NOTES		SCALE: N/A
	REV.: A0		UNIT: mm
			PAGE: 2/4

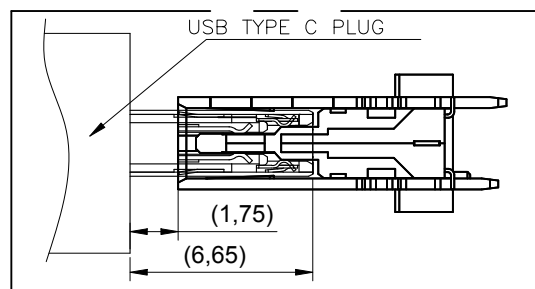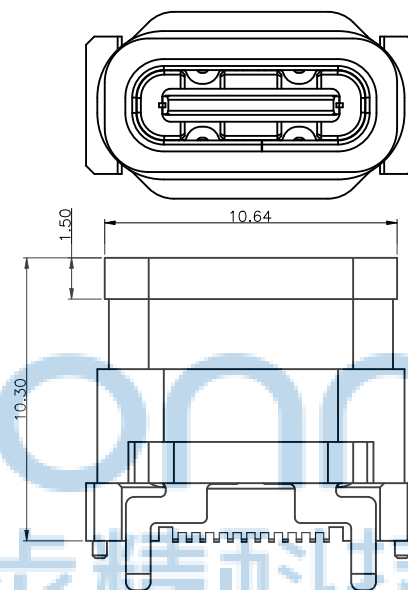

 深圳市步步精科技有限公司	
.X: ± 0.38 .XX: ± 0.25 .XXX: ± 0.13	X*: $\pm 3^{\circ}$.X*: $\pm 2^{\circ}$.XX*: $\pm 1^{\circ}$
NAME: TYPE-C 24P 防水母座 直立式加宽 SMT 四脚插 脚长1.3 带柱 H=10.0 IPX8 方形防水圈	
APPD. JM_Zheng	
CHKD. LYX	PJ. NO.: 126-224-240002-X7G SIZE: A4 DRW NO.:
DR. TSP	FINISH: SEE NOTES MAT'L.: SEE NOTES SCALE: N/A REV.: A0 UNIT: mm PAGE: 3/4

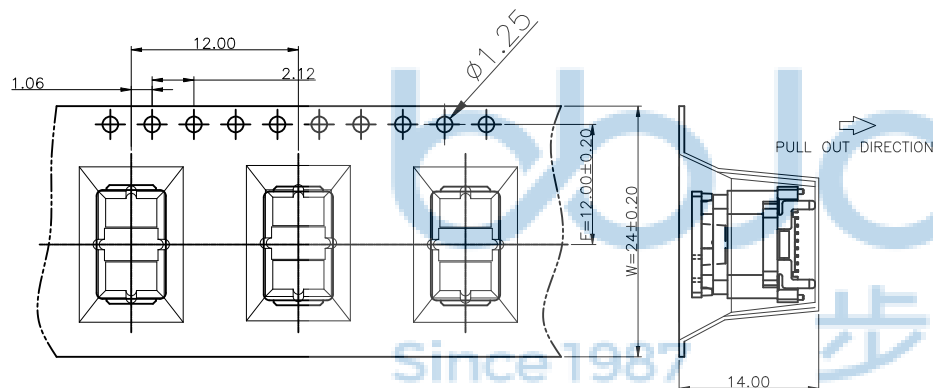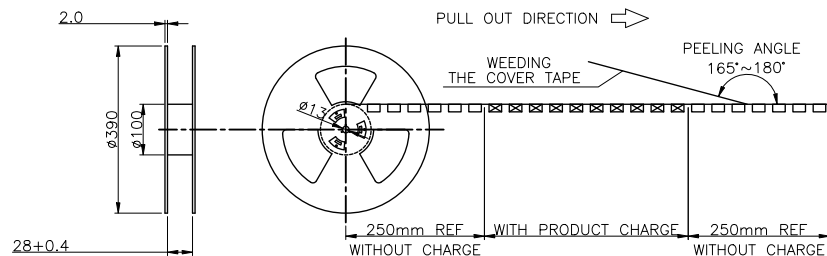

注意:

1. 材料:

纸箱:纤维板, 瓦楞, 双层壁。

胶带:聚苯乙烯, 耐热温度:120℃, 白。

卷筒:聚苯乙烯, 耐热温度:70℃, 蓝色。

包装:聚乙烯, 耐热温度:100℃。



2. 剥离强度:0.1 ~ 1.3 N(10 ~ 130克)

3. 脱皮速度:300mm /min。

4. 每盘都应真空包装包括干燥剂*2。

5. 外箱上贴号物料标签及RHOS标签

6. 同一产品只能装同一纸箱, 不允其它产品;

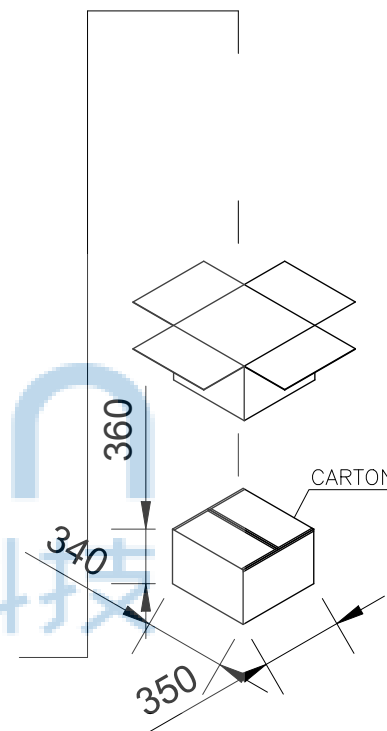

NOTE:

1. QUANTITY: 300 PCS/REEL, 3300PCS/CARTON.

300	11	3300 PCS
PCS/卷	卷/箱	箱

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co., Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司	
.X: ±0.38 .XX: ±0.25 .XXX: ±0.13		X*: ±3" .X*: ±2" .XX*: ±1"	
APPD. JM_Zheng		NAME: TYPE-C 24P 防水母座 直立式加宽 SMT 四脚插 脚长1.3 带柱 H=10.0 IPX8 方形防水圈	
CHKD. LYX		PJ. NO.: 126-224-240002-X7G	
DR. TSP		SIZE: A4 DRW NO.:	
PDWG.NO: 0541-1		FINISH: SEE NOTES MAT'L.: SEE NOTES	
		SCALE: N/A REV.: A0 UNIT: mm PAGE: 4/4	