

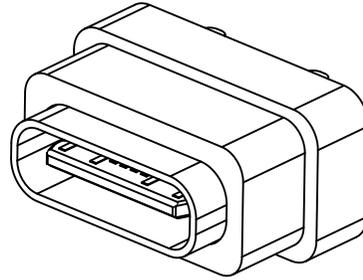
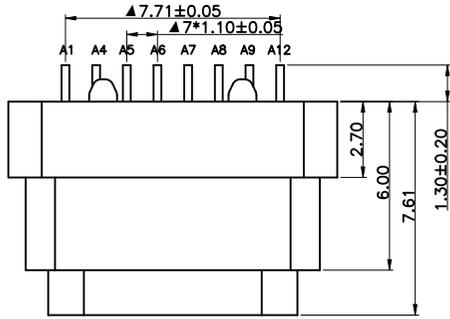
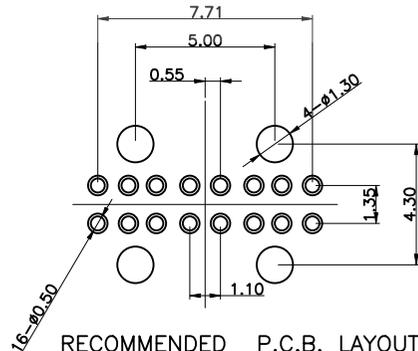
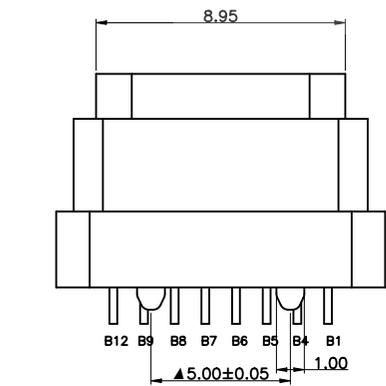



REV.	ECN NO	CONTENT	DATE	ENGINEER
A0				

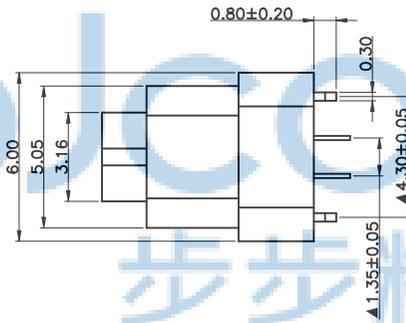

备注 (NOTE):

- 电气特性:
  - 接触区: 接触电阻40mΩ Max, 允许10mΩ变化量. 测试条件: 20mv, 100mA下测量.
  - 接触电流: 3A VBUS引脚; 1.25A用于GND引脚; 其他引脚为0.25A.
  - 额定电压: 30V.
  - 耐电压: 100VR. M. S.
  - 绝缘电阻: 至少100兆欧.
- 机械性能:
  - 插入力: 0.51-2.04Kg
  - 拔出力: 0.82-2.04Kg
  - 耐久性: 0.61-2.04Kg
  - 插拔次数: 10000次.
  - 工作环境: -20°C to +85°C.
- 尺寸标注事项:
  - 图示有标注“▲”记号者为重点尺寸.
  - 图示所有标注“Cpk”尺寸为Cpk检验尺寸.
  - 图示未标注公差之尺寸参考公差表.
  - 图示标注“\*”记号之尺寸为对称尺寸.




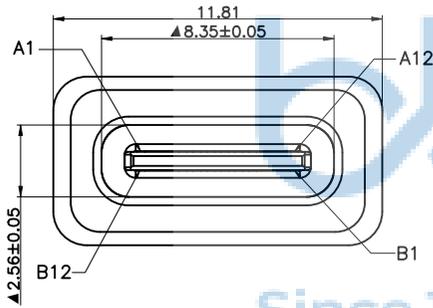


RECOMMENDED P.C.B. LAYOUT  
TOLERANCE UNSPECIFIED ±0.05mm

A12	A11	A10	A9	A8	A7	A6	A5	A4	A3	A2	A1
GND			VBUS		D-	D+	Vconn	VBUS			GND
GND			VBUS	Vconn	D+	D-		VBUS			GND
B1	B2	B3	B4	B5	B6	B7	B8	B9	B10	B11	B12

ALL MATERIAL MEET THE FORMAN'S SPEC; ENVIRONMENT-RELATED SUBSTANCES MANAGEMENT TECHNICAL STANDARD

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		<b>深圳市步步精科技有限公司</b>	
.X: ±0.38 .XX: ±0.25 .XXX: ±0.13		X*: ±3' .X*: ±2' XX*: ±1'	
NAME:	TYPE-C 16P 防水母座 直立式 四脚插 H=7.61 端子DIP IPX8		
APPD.	JM_Zheng	PJ. NO.: 126-225-160001-J2G SIZE: A4   DRW NO.:	FINISH: SEE NOTES   MAT'L.: SEE NOTES SCALE: N/A   REV.: A0   UNIT: mm   PAGE: 1/2
CHKD.	LYX		
PDWG.NO:	0395-1	DR.	LHC

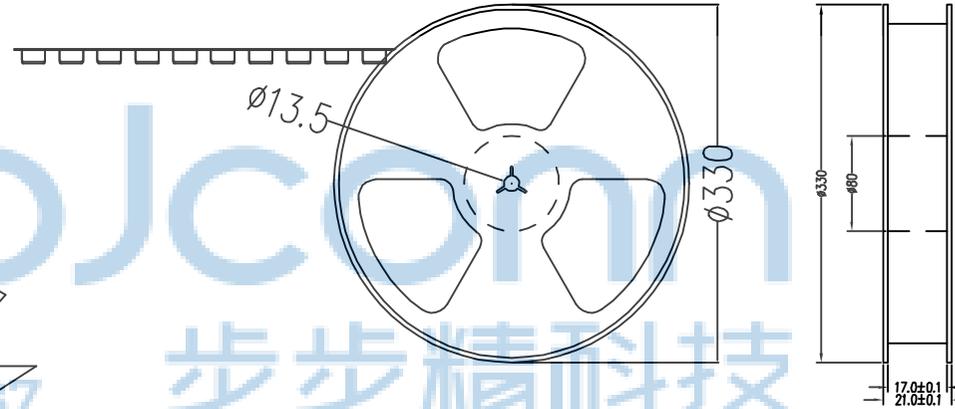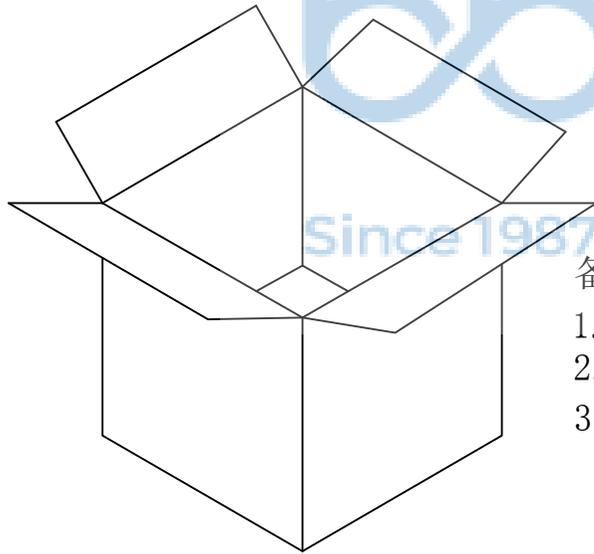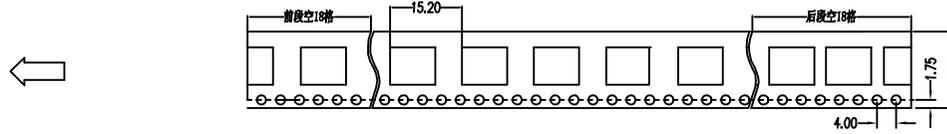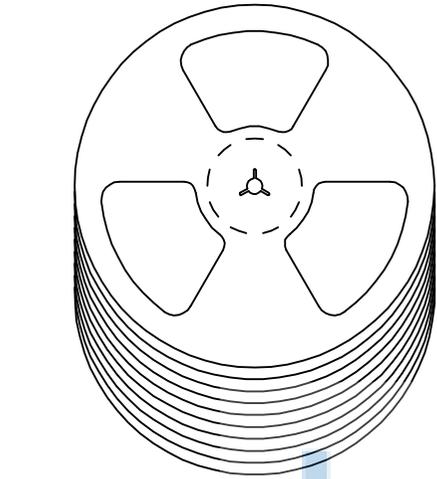

备注:

1. 包装数量: 1000/PCS/卷, 10卷/箱。
2. 包装袋长度: 每卷前后各空10-20个空格, 中间包装。
3. 材质:  
载体: 聚丙烯 (PS), 阻抗 $10^{6-9} \Omega$   
上带: 聚乙烯 (PET), 阻抗 $10^{6-11} \Omega$   
卷盘: 聚苯乙烯。

纸箱规格: 345\*345\*23MM

纸箱规格: 345\*345\*35MM

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司	
PDWG.NO: 0395-1		APPD. JM_Zheng CHKD. LYX DR. LHC	NAME: TYPE-C 16P 防水母座 直立式 四脚插 H=7.61 端子DIP IPX8 PJ. NO.: 126-225-160001-J2G SIZE: A4   DRW NO.: FINISH: SEE NOTES   MAT'L.: SEE NOTES SCALE: N/A   REV.: A0   UNIT: mm   PAGE: 2/2