
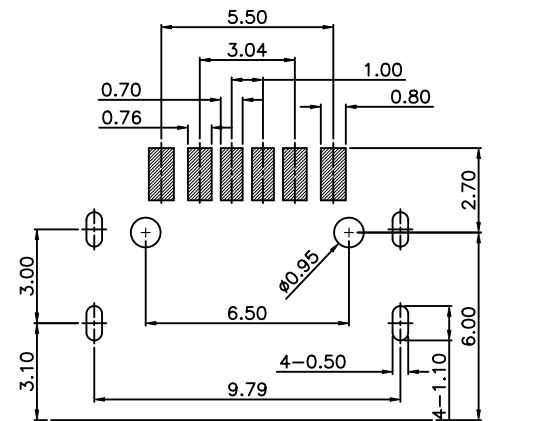


REV.	ECN NO	CONTENT	DATE	ENGINEER
A0		Initial release	/	TSP






NOTES:

SPECIFICATION:

1. CURRENT RATING: 3.0A MAX
2. VOLTAGE: 100 VAC
3. TEMPERATURE RANGE: -30° C~+85° C
4. CONTACT RESISTANCE: 40 MILLIONHM MAX
5. INSULATION RESISTANCE: 100 MEGOHMS MIN
6. LNSERTION FORCE: 5N~20N
7. UNMATING FORCE: 8N~20N
8. DURABILITY: 10000 CYCLES
9. WATER PROOFNESS: THIS PRODUCT IS BASED ON IPX7.

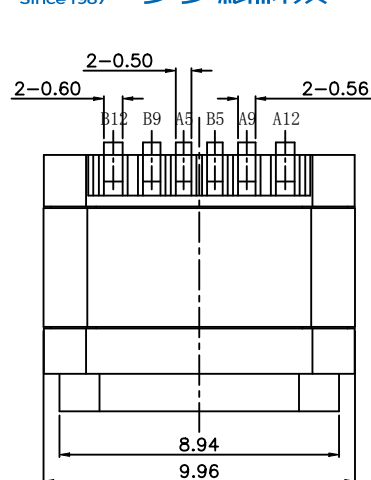

RECOMMEND P.C.B LAYOUT (COMPONENT SIDE)
TOLERANCE FOR PCB LAYOUT IS ± 0.05

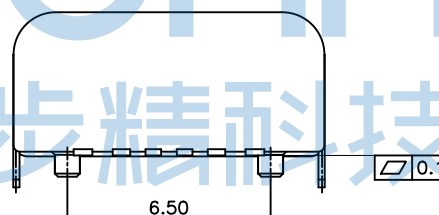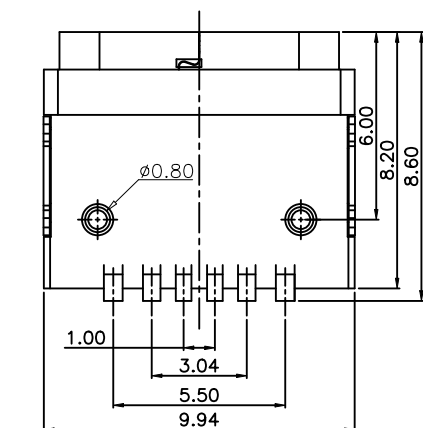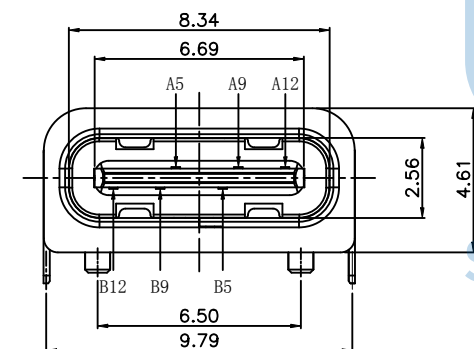

A5	CC1	B12	GND
A9	VBUS	B9	VBUS
A12	GND	B5	CC2
PIN	SIGNAL NAME	PIN	SIGNAL NAME

黑胶 LCP-V0	SUS201 镀镍50u"	SUS201 T=0.15mm	LCP UL94 V0, BK	C2680-EH, T=0.2, 半金1u"
规格	外壳	中夹片	胶体	端子

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co., Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
OR IN PART WITHOUT
PRIOR WRITTEN PERMISSION.
PDWG. NO: 0545-1

.X: ± 0.38 .XX: ± 0.25 .XXX: ± 0.13		X': $\pm 3'$.X': $\pm 2'$.XX': $\pm 1'$		NAME: TYPE-C 6P 防水母座 四脚插 带柱 L=8.20 CH=2.35 端子SMT IPX7 不带防水圈 (点胶)	
APPD.	JM_Zheng	PJ. NO.: UC.01.53-1W-0004		SIZE: A4 DRW NO.:	
CHKD.	LYX	FINISH: SEE NOTES		MAT'L.: SEE NOTES	
DR.	TSP	SCALE: N/A		REV.: A0	UNIT: mm

深圳市步步精科技有限公司





A

B

C

D

E

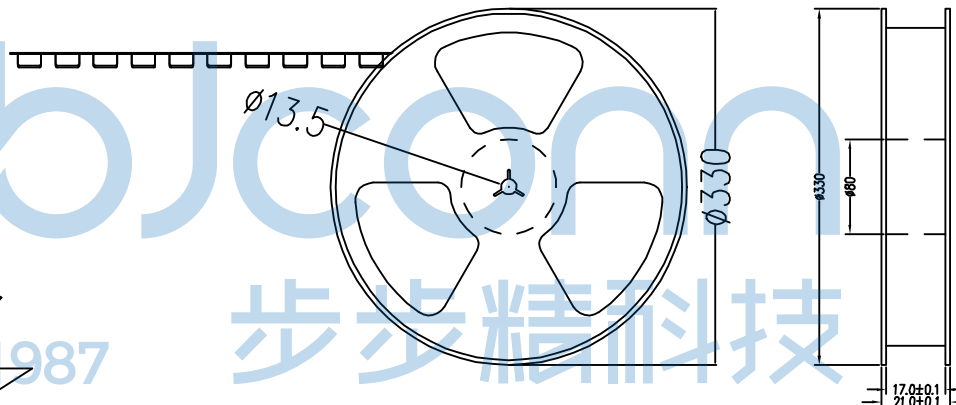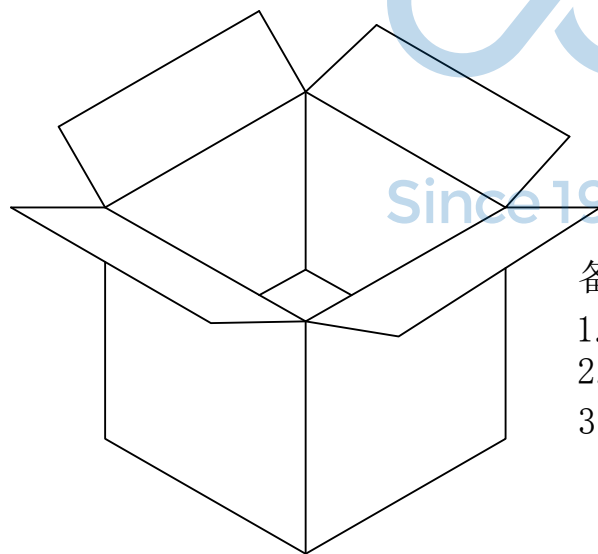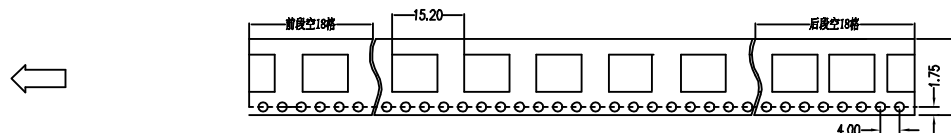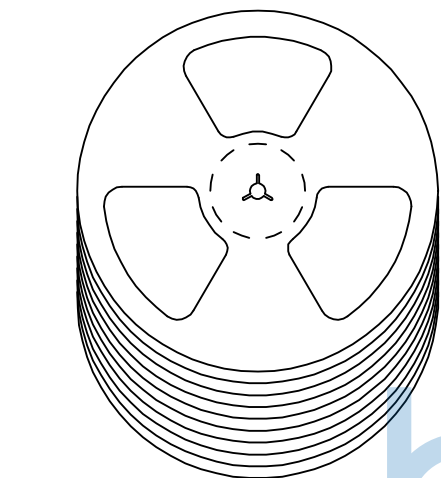

备注:

1. 包装数量: 700/PCS/卷, 10卷/箱。
2. 包装袋长度: 每卷前后各空10-20个空格, 中间包装。
3. 材质:
载体: 聚丙烯 (PS) ,
上带: 聚乙烯 (PET) ,
卷盘: 聚苯乙烯。

纸箱规格: 345*345*23MM

纸箱规格: 345*345*35MM

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司		NAME: TYPE-C 6P 防水母座 四脚插 带柱 L=8.20 CH=2.35 端子SMT IPX7 不带防水圈 (点胶)	
.X: ±0.38 .XX: ±0.25 .XXX: ±0.13	X': ±3" .X': ±2" .XX': ±1"	APPD.	JM_Zheng	PJ. NO.: UC.01.53-1W-0004	
PDWG.NO: 0545-1	DR.	CHKD.	LYX	SIZE: A4	DRW NO.:
				FINISH: SEE NOTES	MAT'L.: SEE NOTES
				SCALE: N/A	REV.: A0 UNIT: mm PAGE: 2/2