
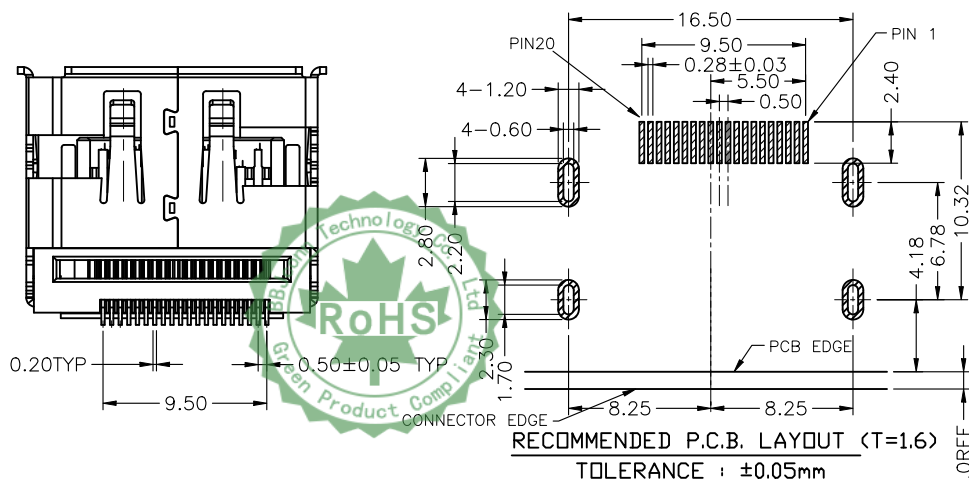
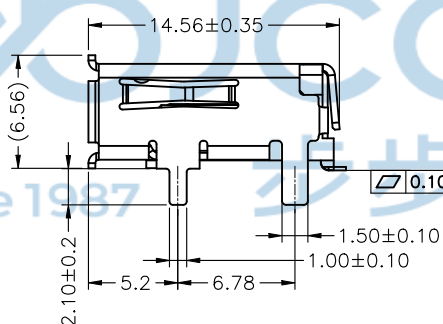
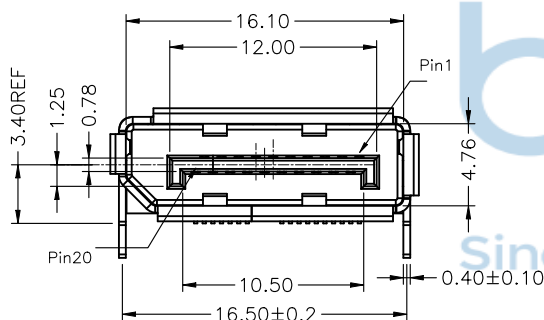
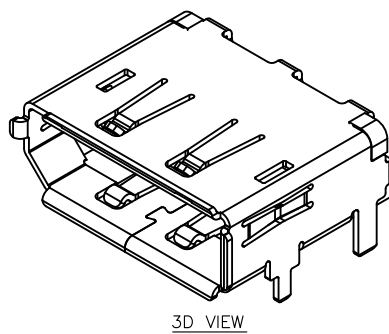


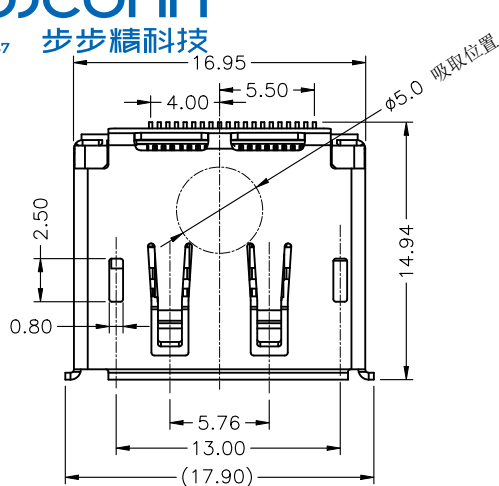

NOTE:

1. Electrical:

- 1.1 RATING CURRENT: 0.5A;
- 1.2 RATING VOLTAGE: 40V;
- 1.3 CONTACT RESISTANCE: 30 mΩ MAX.;
- 1.4 INSULATION RESISTANCE: 100MΩ MIN.;
- 1.5 DIELECTRIC WITHSTANDING VOLTAGE: 500V AC/1MINUTE

2. Mechanical:

- 2.1 Mating Force: 4.5Kgf Max.;
- 2.2 Unmating Force: 1.0~4.0Kgf;
- 2.3 DURABILITY: 10000 CYCLES.

3. Environmental

- 3.1 OPERATING TEMPERATURE: -20°C-85°C



④	SHELL	SUS	1	NI PLATED
③	CONTACTS	COPPER ALLOY	20	Au 1u" PLATING IN CONTACT AREA, 50u" MIN MATTE Tin PLATED IN SOLDER AREA, 50u" MIN. NICKEL UNDER PLATED OVERALL.
②	COVER	LCP COLOR:BLACK	1	UL 94V-0
①	HOUSING	LCP COLOR:BLACK	1	UL 94V-0
NO.	DESCRIPTION	MATERIAL	QTY.	REMARK

THIS DOCUMENT IS THE
SOLE PROPERTY OF

BBJconn Technology Co.,Ltd.

Corporation AND SHOULD

NOT BE USED IN WHOLE

OR IN PART WITHOUT

PRIOR WRITTEN PERMISSION.

PDWG,NO: XX

深圳市步步精科技有限公司

.X: ±0.38
.XX: ±0.30
.XXX: ±0.25

X': ±3"
.X': ±1"
.XX': ±1"

NAME:

DP 普通款/脚长2.0/无底座/无LOGO

APPD. JM_Zheng2023/08/08

CHKD. DAX 2023/08/08

DR. King 2023/08/08




PJ. NO.: 158-221-200001-00G

SIZE: A4 DRW NO.: -----



FINISH: SEE NOTES MAT'L.: SEE NOTES

SCALE: N/A REV.: A0 UNIT: mm PAGE: 1/2

REV.	ECN NO.	CONTENT	DATE	ENGINEER
AO			2022 11/08	

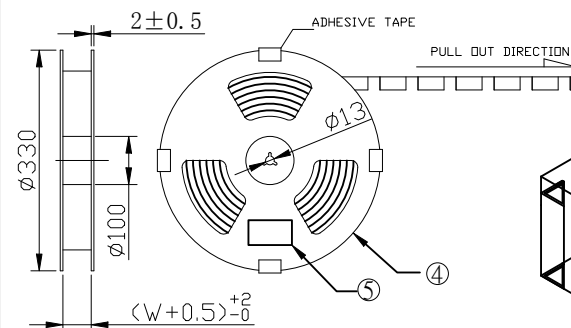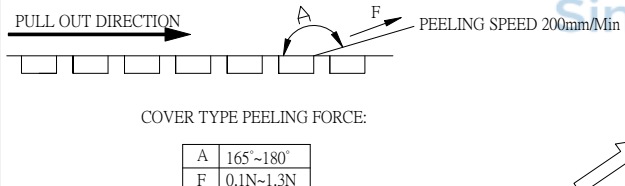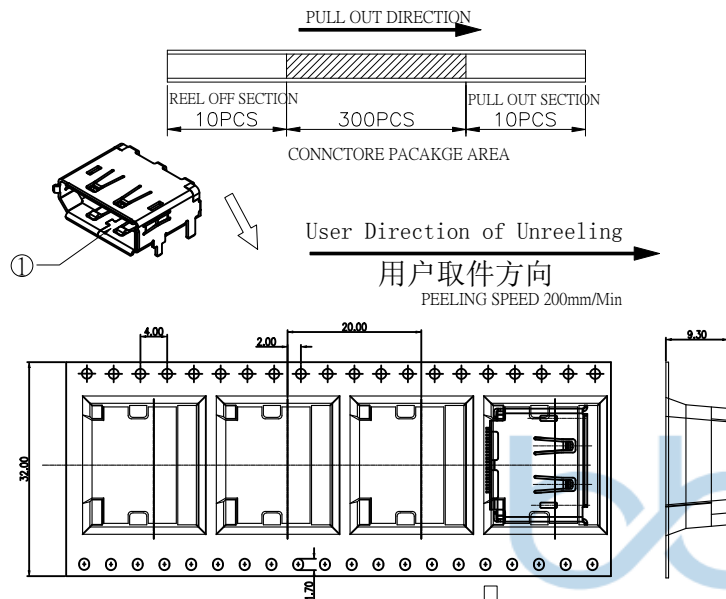

图二

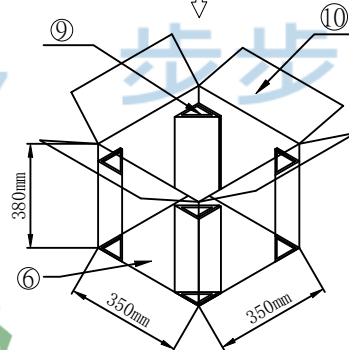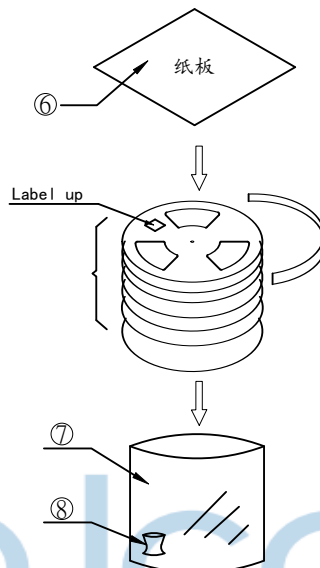

图三

- 一、包装方式：
每料盘封装300PCS产品（图1），10盘（叠放方式见图2）
装一箱（图3）。
- 二、包装数量：
300pcsX10盘=3000pcs
- 三、产品单重:2.5g，净重7.5Kg, 包装材料毛重5.3Kg, 总重12.8±1Kg.
- 四、存储条件: 温度-40℃~85℃ 湿度<85%RH
- 五、我司保存期限: 6个月
- 六、料件使用期限: 12个月
- 七、最小包装以及外包装盒都应有RoHS标签或标识。



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co., Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.				深圳市步步精科技有限公司			
.X: ±0.38 .XX: ±0.25 .XXX: ±0.13		X*: ±3" .X*: ±2" .XX*: ±1"		NAME: DP 普通款/脚长2.0/无底座/-无LOGO			
APPD.		JM_Zheng		PJ. NO.: 158-221-200001-00G			
CHKD.		HongGuang		SIZE: A4 DRW NO.: -----			
PDWG.NO: 9999-9		DR.		LYX		FINISH: SEE NOTES	
						MAT'L.: SEE NOTES	
						SCALE: N/A	
						REV.: AO	
						UNIT: mm	
						PAGE: 2/2	