
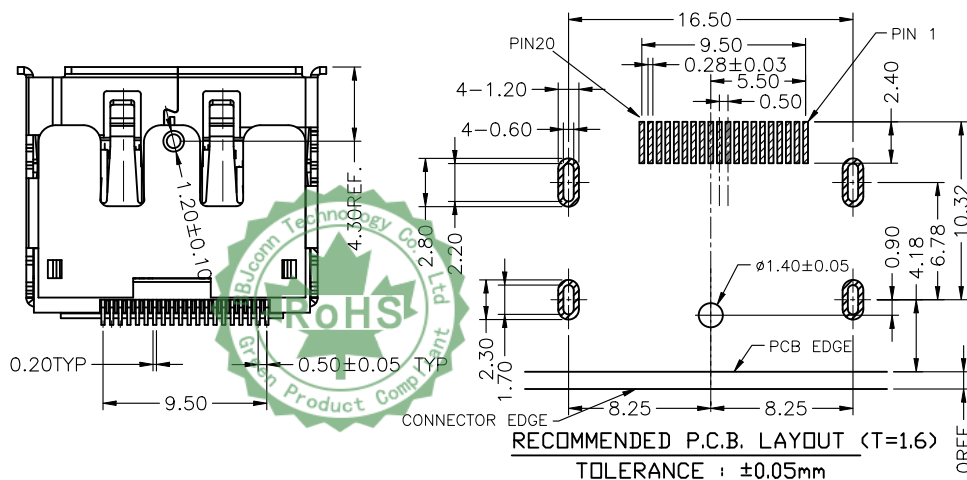
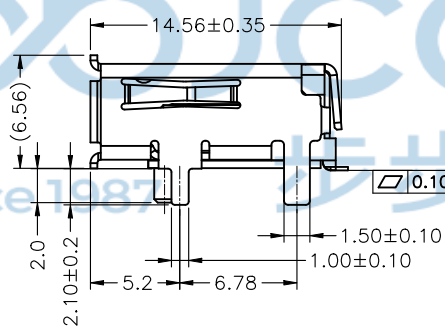
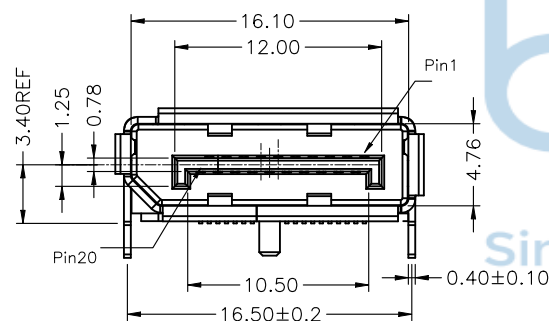
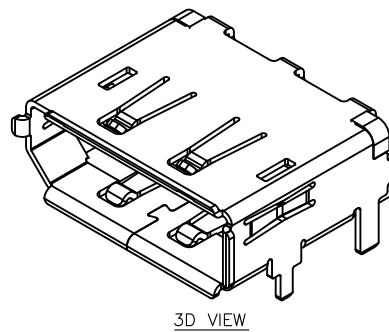


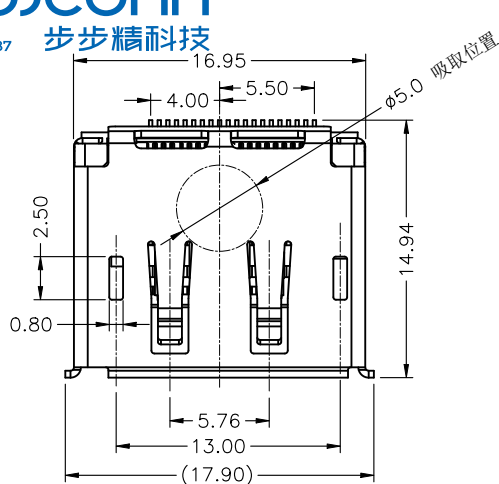

NOTE:

1. Electrical:

- 1.1 RATING CURRENT: 0.5A;
- 1.2 RATING VOLTAGE: 40V;
- 1.3 CONTACT RESISTANCE: 30 mΩ MAX.;
- 1.4 INSULATION RESISTANCE: 100MΩ MIN.;
- 1.5 DIELECTRIC WITHSTANDING VOLTAGE: 500V AC/1MINUTE

2. Mechanical:

- 2.1 Mating Force: 4.5Kgf Max.;
- 2.2 Unmating Force: 1.0~4.0Kgf;
- 2.3 DURABILITY: 10000 CYCLES.

3. Environmental

- 3.1 OPERATING TEMPERATURE: -20°C-85°C



④	SHELL	SUS	1	NI PLATED
③	CONTACTS	COPPER ALLOY	20	Au 15u" PLATING IN CONTACT AREA, 50u" MIN MATTE Tin PLATED IN SOLDER AREA, 50u" MIN. NICKEL UNDER PLATED OVERALL.
②	COVER	LCP COLOR:BLACK	1	UL 94V-0
①	HOUSING	LCP COLOR:BLACK	1	UL 94V-0
NO.	DESCRIPTION	MATERIAL	QTY.	REMARK

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.

深圳市步步精科技有限公司




Corporation AND SHOULD
NOT BE USED IN WHOLE
OR IN PART WITHOUT
PRIOR WRITTEN PERMISSION.

.X: ±0.38
.XX: ±0.30
.XXX: ±0.25
X*: ±3*
X*: ±1*
XX*: ±1*



NAME:
DP 普通款/脚长2.0/有柱/无LOGO
PJ. NO.: 158-221-200002-00G
SIZE: A4 DRW NO.: -----
FINISH: SEE NOTES
SCALE: N/A
REV.: A0
UNIT: mm
PAGE: 1/2

PDWG:NO: XX
APPD. JM_Zheng2023/08/08
CHKD. DAX 2023/08/08
DR. King 2023/08/08

REV.	ECN NO.	CONTENT	DATE	ENGINEER
AO			2022 11/08	

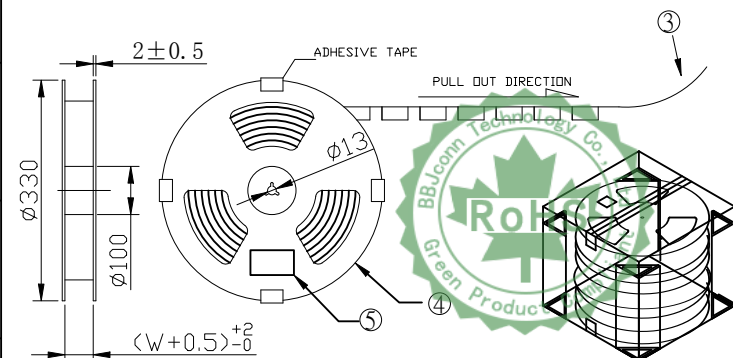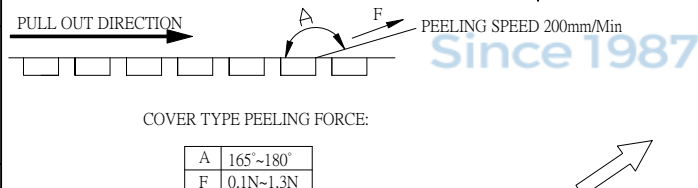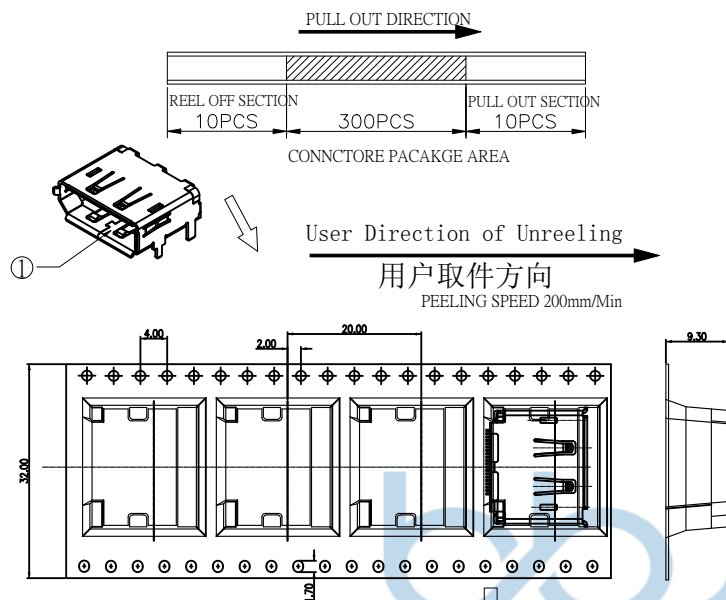

图二

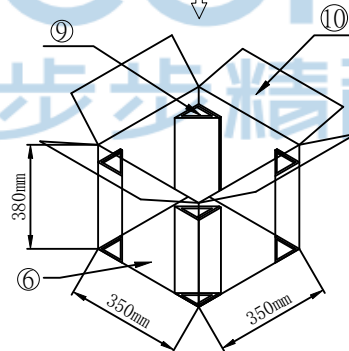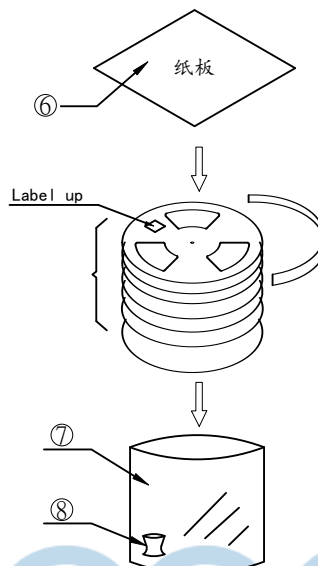

图三

- 一、包装方式：
每料盘封装300PCS产品（图1），10盘（叠放方式见图2）
装一箱（图3）。
- 二、包装数量：
300pcsX10盘=3000pcs
- 三、产品单重:2.5g, 净重7.5Kg, 包装材料毛重5.3Kg, 总重12.8±1Kg.
- 四、存储条件: 温度-40℃~85℃ 湿度<85%RH
- 五、我司保存期限: 6个月
- 六、料件使用期限: 12个月
- 七、最小包装以及外包装盒都应有RoHS标签或标识。



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co., Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.				深圳市步步精科技有限公司			
.X: ±0.38 .XX: ±0.25 .XXX: ±0.13		X*: ±3" .X*: ±2" .XX*: ±1"		NAME: DP 普通款/脚长2.0/有柱/-无LOGO			
APPD.		JM_Zheng		PJ. NO.: 158-221-200002-00G			
CHKD.		HongGuang		SIZE: A4 DRW NO.: -----			
PDWG.NO: 9999-9		DR.		LYX		FINISH: SEE NOTES	
				SCALE: N/A		REV.: AO	
				UNIT: mm		PAGE: 2/2	