










REV.	ECN NO.	CONTENT	DATE	ENGINEER
A0		Initial release	/	TSP

MATERIALS

1. HOUSING : L.C.P, (UL 94V-0), BLACK
2. TERMINAL : BRASS (C2680), GOLD FLASH PLATING ON CONTACT AREA, MATTE TIN PLATING ON SOLDER TAIL, UNDER NICKEL PLATING OVER ALL.
3. SHELL : S50C/BRASS(C2680), NICKEL PLATING






SPECIFICATION

1. CURRENT RATING : 0.5 A MAX.
2. DIELECTRIC WITHSTANDING VOLTAGE : 500V AC R.M.S. FOR ONE MINUTE.
3. INSULATION RESISTANCE : 100M OHMS MIN.
4. CONTACT RESISTANCE : 30m OHMS MAX.
5. OPERATING TEMPERATURE : -20°C TO +85°C.
6. INSERTION FORCE : 4.5kgf MAX.
7. EXTRACTION FORCE : 1.0~4.0kgf MIN.
8. SALT SPRAY : 24 HOURS PASS.
9. REFLOW SOLDERING(SMD COMPONENT) OVEN TEMPERATURE: 260°C.5SEC

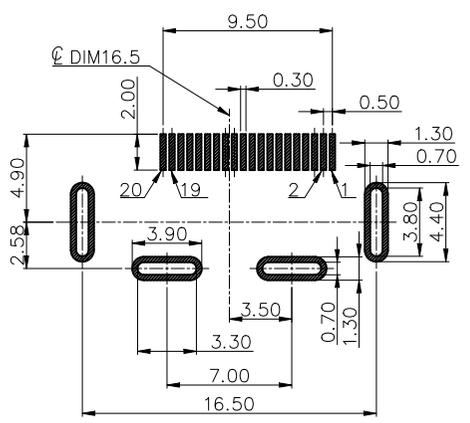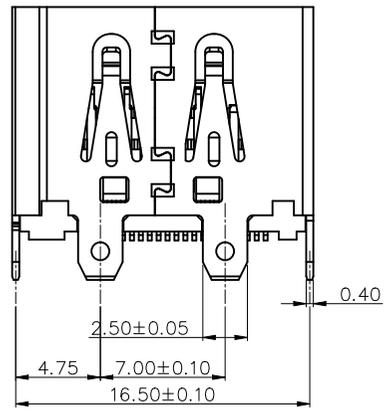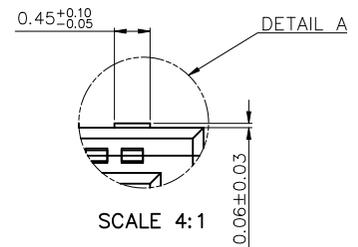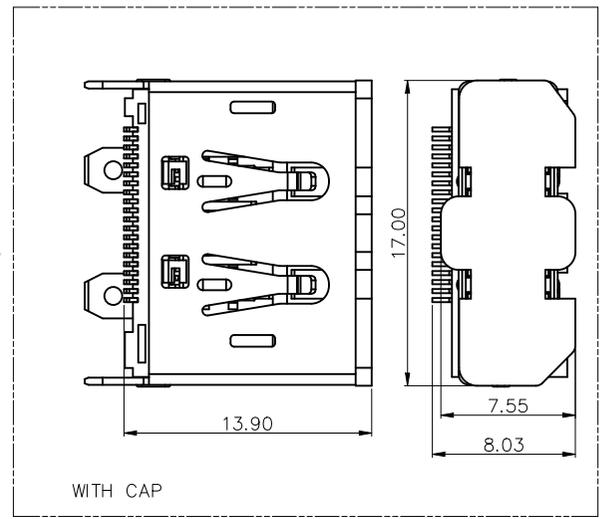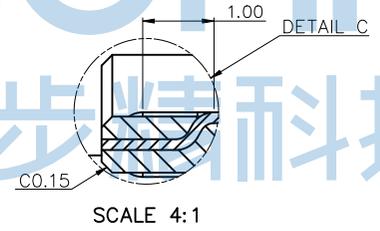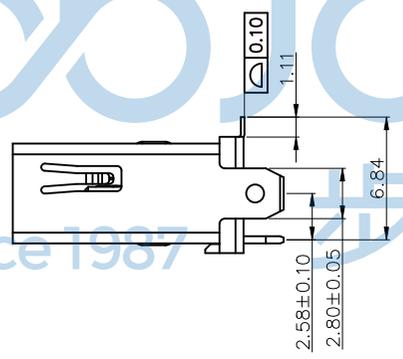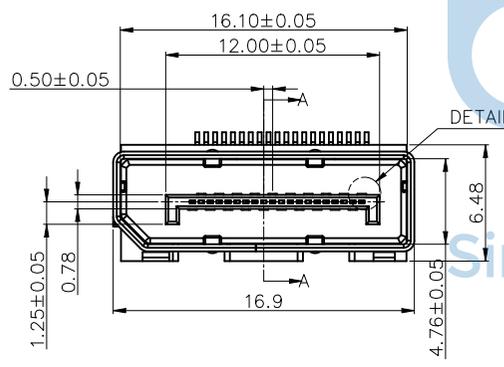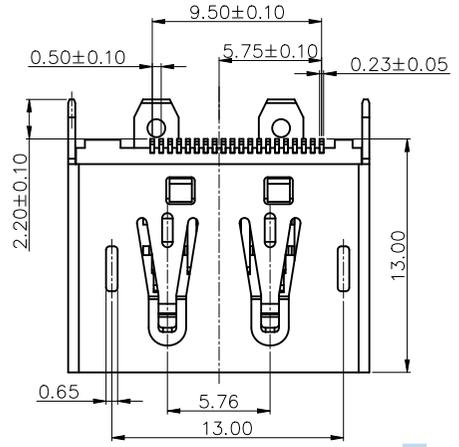

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司 .X: ±0.38 X: ±3* .XX: ±0.25 .X: ±2* .XXX: ±0.13 .XX: ±1*		NAME: DP 20P 母座 180度 四脚插 端子SMT 外壳脚长2.2 无弹片 H=13.0 平口 铜壳 绑带 APPD. JM_Zheng P.J. NO.: 158-224-200002-U4G CHKD. LYX SIZE: A4 DRW NO.: FINISH: SEE NOTES MAT'L.: SEE NOTES PDWG.NO: 0470-1 DR. TSP SCALE: N/A REV.: A0 UNIT: mm PAGE: 1/2	
--	--	--	--	--	--



REV.	ECN NO.	CONTENT	DATE	ENGINEER
A0		Initial release	/	TSP

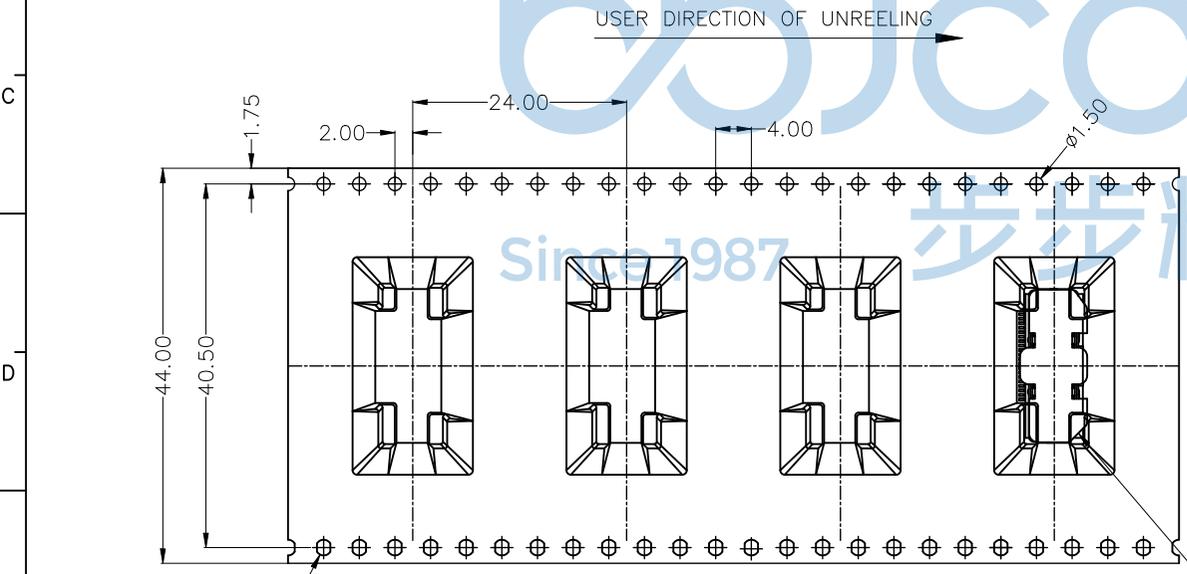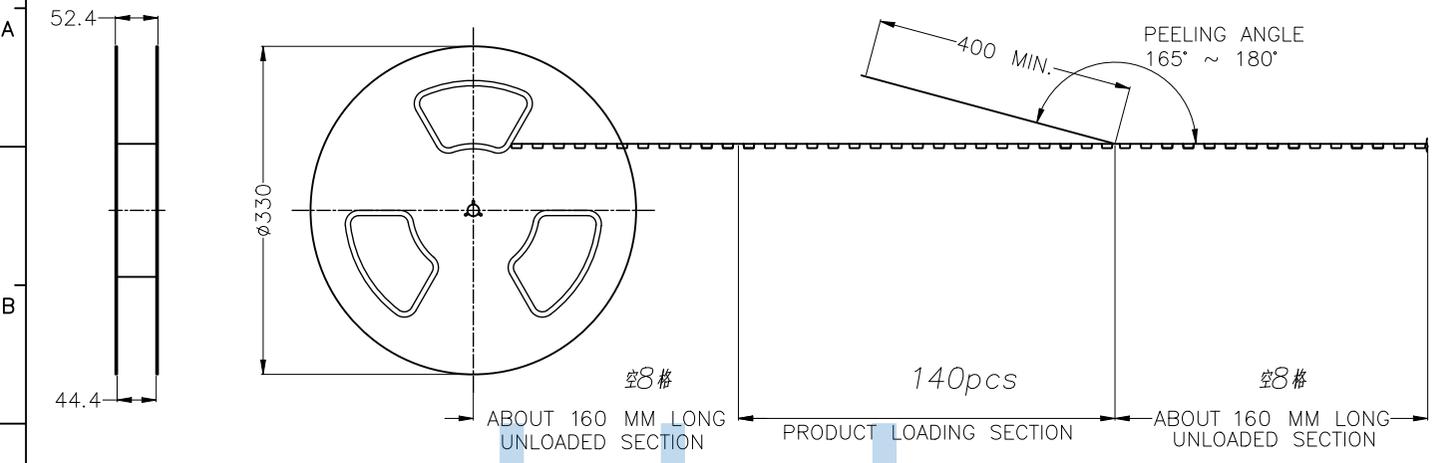

请注意“C”角方向

PACKAGE

- SIZE :
REEL : DIA.=330mm
CORTON(外箱) : 350x350x450mm (LxWxH)
- QUANTITY :
140 PCS/REEL(卷)
9 REELS/CARTON : 1260PCS
(9卷/箱 1260PCS)

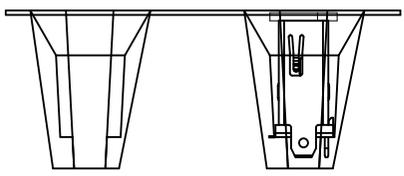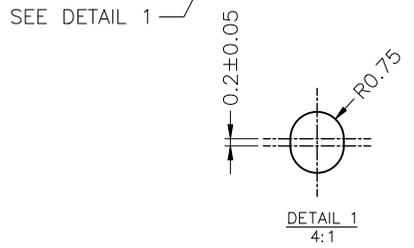

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司	
PDWG.NO: 0470-1	DR. TSP	NAME: DP 20P 母座 180度 四脚插 端子SMT 外壳脚长2.2 无弹片 H=13.0 平口 铜壳 编带	PJ. NO.: 158-224-200002-U4G
APPD. JM_Zheng	CHKD. LYX	SIZE: A4	DRW NO.:
FINISH: SEE NOTES		MAT'L.: SEE NOTES	
SCALE: N/A		REV.: A0	UNIT: mm
PAGE: 2/2			