

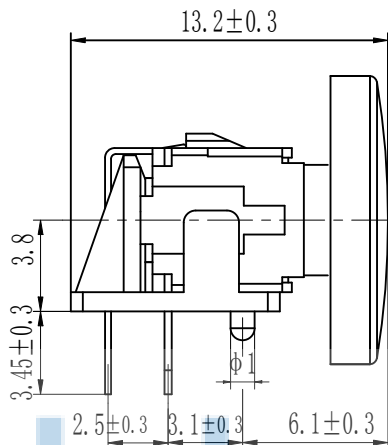




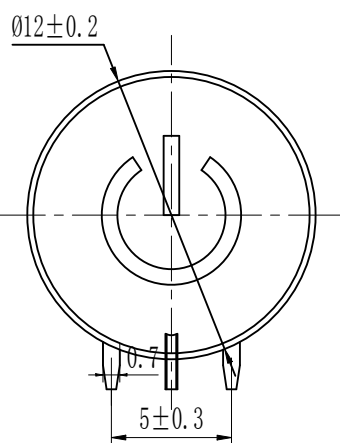


轻触开关主要技术指标: Main Specifications:


气候等级 Climate Grade	额定值 Rated Values	接触电阻 Contact Resistance	耐电压 Dielectric Strength	绝缘电阻 Insulation Resistance	动作力 Operating Force	寿命 Life	盐雾试验 Salt mist. Test
-25℃ 至 +75℃	30V DC, 30mA	≤0.05Ω	250V AC	≥100MΩ	260gf±50gf	10W times	12±1 hours.
-25℃ 至 +75℃	30V DC, 30mA	≤0.05Ω	250V AC	≥100MΩ	160gf±50gf	10W times	12±1 hours.

灯光选型表

双色灯光	灯光代码	电原理图
蓝/红双色光(宽脚蓝)	BL/R Blue/Red	
绿/红双色光(宽脚绿)	G/R Green/Red	
白/红双色光(宽脚白)	W/R White/Red	
蓝/黄双色光(宽脚蓝)	BL/Y Blue/yellow	
橙/蓝双色光(宽脚橙)	O/BL Orange/Blue	
....		..

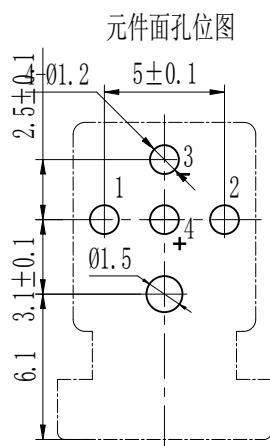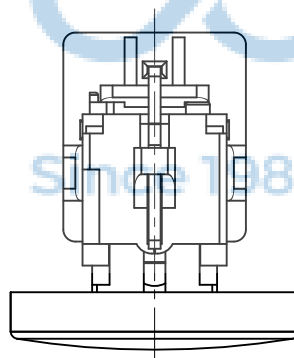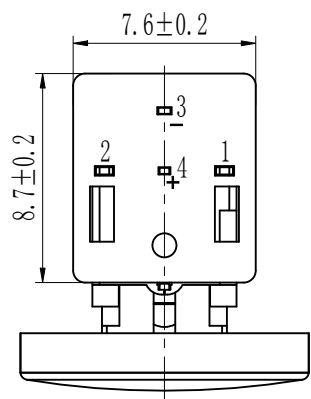

电原理图



7	圆帽	PC	1	银白	
6	定位板	PA66	1	黑色	
5	LED 灯		1	透明	
4	按钮	PA66	1	瓷白	
3	弹片	不锈钢	1	Ag	
2	塑座	PA66	1	黑色	
1	卡件	H62	1	Ag	
序号	名称	材料	数量	镀层/颜色	备注

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co., Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
OR IN PART WITHOUT
PRIOR WRITTEN PERMISSION.
PDWG.NO: 0436-1

深圳市步步精科技有限公司


NAME: 轻触开关 7.6X13.2L 侧插 不锈钢弹片 260gf 红蓝双色灯 瓷白按钮 直径12银白帽 帽雕上电源符号

PJ. NO.: 901-431-193008-T9G
SIZE: A4 DRW NO.:
FINISH: SEE NOTES MAT'L.: SEE NOTES
SCALE: N/A REV.: A0 UNIT: mm PAGE: 1/2


APPD. JM_Zheng
CHKD. LYX
DR. TSP

REV.	ECN NO	CONTENT	DATE	ENGINEER
A0		Initial release	/	TSP

PE袋规格: 260*185

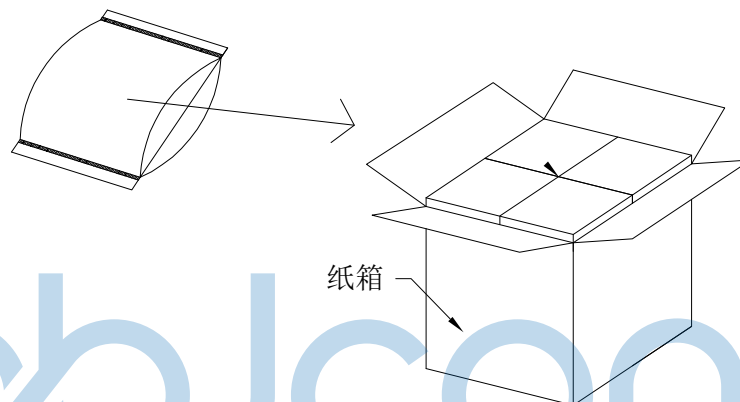

成品标签



1. 包装要求:

- 1.1 每个PE袋包装200pcs;
- 1.2 每1袋放一小纸盒;
- 1.3 每20个小纸盒放一个纸箱, 共计4000pcs;
- 1.4 纸箱外贴上标签



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司	
PDWG.NO: 0436-1		NAME: 轻触开关 7.6X13.2L 侧插 不锈钢弹片 260gf 红蓝双色灯 瓷白按钮 直径12银白帽 帽雕上电源符号	
APPD.	JM_Zheng	PJ. NO.: 901-431-193008-T9G	
CHKD.	LYX	SIZE: A4	DRW NO.:
DR.	TSP	FINISH: SEE NOTES	MAT'L.: SEE NOTES
		SCALE: N/A	REV.: A0 UNIT: mm PAGE: 2/2