

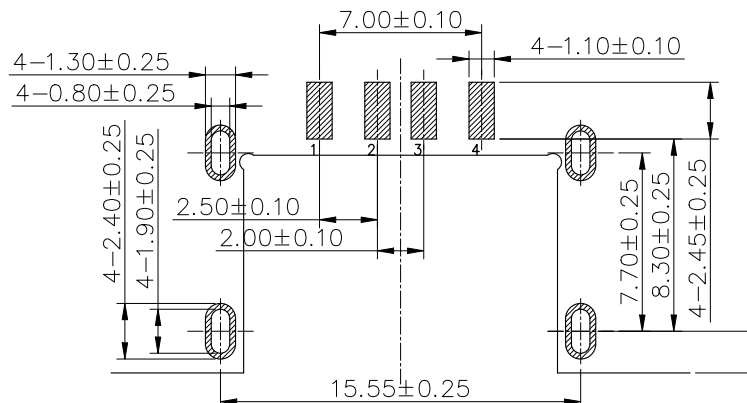
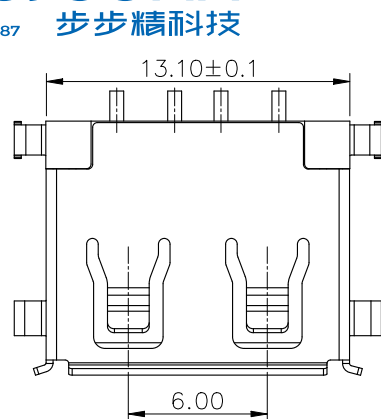
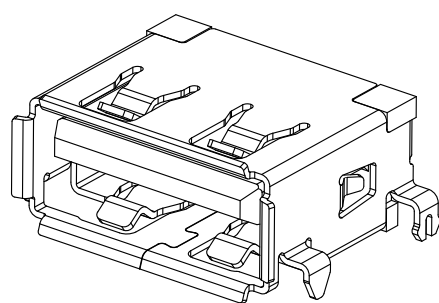
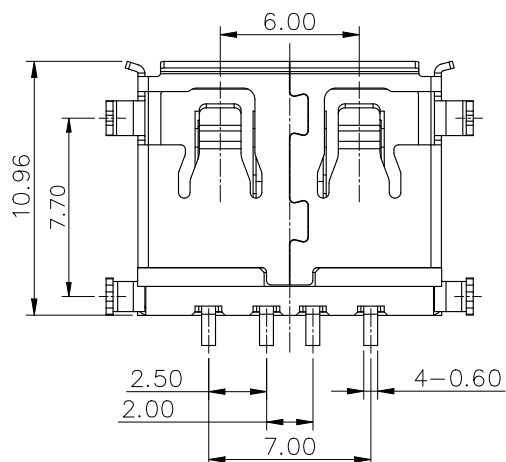


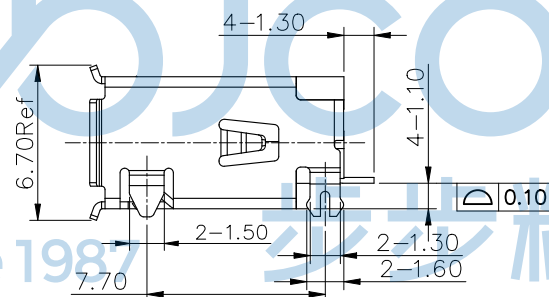

RECOMMENDED P.C.B HOLE LAYOUT
COMPONENT SIDE VIEW(TOLERANCE: +/-0.05)

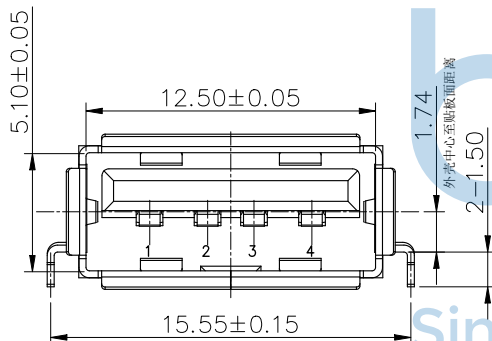

3D(2:1)

NOTES:

1.MATERIAL

CONTACTS: COPPER ALLOY (T=0.25mm)
SHELL: STAINLESS STEEL (T=0.30mm)
HOUSING: HIGH TEMPERATURE RESISTANT PLASTIC,UL94 V-0.

2. ELECTRICAL PERFORMANCE,

CONTACT RESISTANCE:30mΩ MAX
CONTACT CURRENT RATING:3.0 AMPERES
DIELECTRIC WITHSTAND VOLTAGE, 500V R. M. S
INSULATION RESISTANCE: 100MΩ MIN
OPERATING TEMPERATURE: -40° C~+85° C.

3. MECHANICAL PERFORMANCE,

INSERTION FORCE: 3.5kgf Max
REMOVAL FORCE: 1.02kgf Min
DURABILITY: 7500 CYCLES.


4. PLATING SPECIFICATION:

CONTACTS: GOLD PLATED 3u" ON CONTACT AREA,Sn ON SOLDER AREA,
NICKEL UNDERPLATED.
SHELL: 80u"MIN BRIGHT NICKEL PLATING OVER ALL,
NICKEL MUST BE SOLDABILITY.
HOUSING:HIGH TEMPERATURE RESISTANT PLASTIC,UL94 V-0 .



Pin Number	Signal Name
1	VBUS
2	D-
3	D+
4	GND


THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司 .X: ±0.38 .X': ±3" .XX: ±0.25 .X': ±2" .XXX: ±0.13 .XX': ±1"		NAME:USB 2.0 AF 90度 短体 L=11.15 沉板1.1 四脚插 端子SMT 镀金3U 大电流3A 卷边 LCP黑胶 不锈钢外壳	
APPD.	JM_Zheng	PJ. NO.: 127-271-040001-V2G		SIZE: A4 DRW NO.:	
CHKD.	LYX	FINISH: SEE NOTES		MAT'L.: SEE NOTES	
PDWG.NO:	0100-2	DR.	ZY	SCALE: N/A	REV.: A0 UNIT: mm PAGE: 1/2

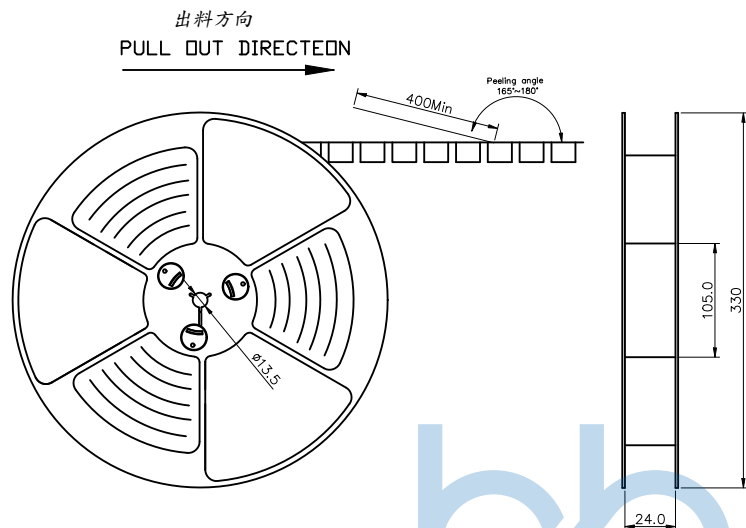


NOTES

1. 帶子引導長度
LEAD TAPE LENGTH

出料方向
PULL OUT DIRECTION

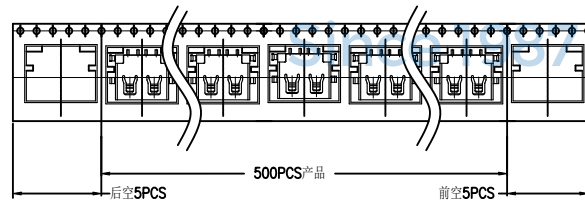

2. 上帶剝力為: 0.1~1.3N(10.2gf~130gf)
PEELING OFF FORCE OF TOP TAPE: 0.1~1.3N(10.2gf~130gf)
出貨運輸過程中一定注意:
THIS REQUIREMENT SHOULD BE APPLIED AT SHIPMENT:
卷帶在運輸過程中不能散開
PEELING OFF SHOULD NOT BE ALLOWED DURING TRANSPORTATION


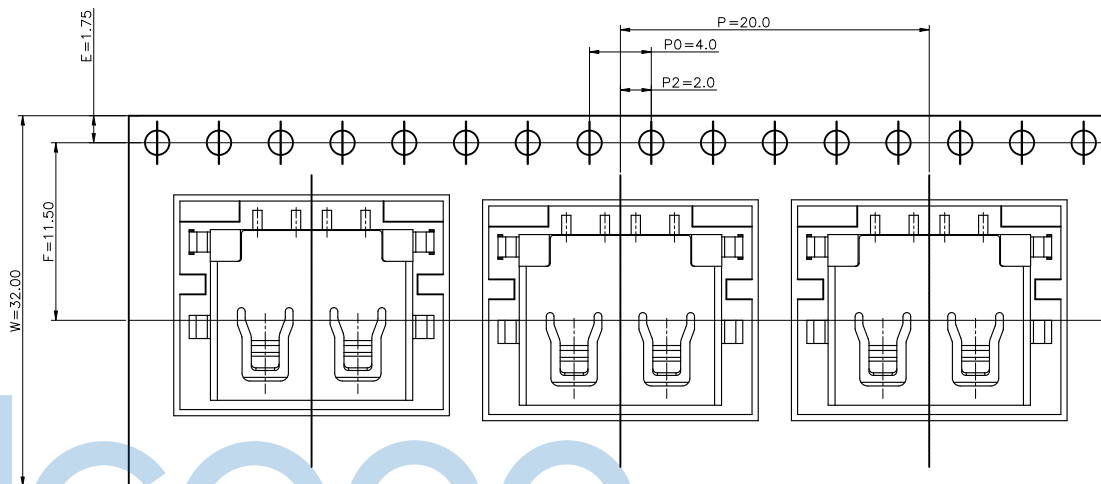


TAPE & REEL 10 PCS

1 REEL
= 500 PCS

BOX

DIMENSIONS:
33.5X33.5X30.5

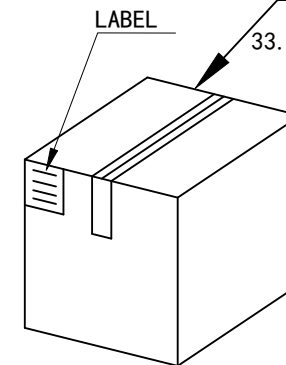

1 CARTON
=10 REELS
=5000 PCS



包裝明細表 (The detail of the packing) Carton					
包裝容量 (Packing Capacity)			重量 (Weight) (Kg)		
pcs/box	boxs/Carton	Pcs/Box	N. W. /Pcs	N. W. /Box	G. W. /Box
500	10	5000	----	----	----



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co., Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.				深圳市步步精科技有限公司			
.X: ±0.38 .XX: ±0.25 .XXX: ±0.13		X*: ±3" .X*: ±2" .XX*: ±1"		NAME: USB 2.0 AF 90度 短体 L=11.15 沉板 1.1 四脚插 端子 SMT 镀金 3U 大电流 3A 卷边 LCP 黑胶 不锈钢外壳			
APPD. JM_Zheng		CHKD. LYX		PJ. NO.: 127-271-040001-V2G			
PDWG. NO: 0100-2		DR. ZY		SIZE: A4 DRW NO.:			
				FINISH: SEE NOTES MAT'L.: SEE NOTES			
				SCALE: N/A REV.: A0 UNIT: mm PAGE: 2/2			