

NOTES:

1.MATERIAL

CONTACTS: COPPER ALLOY (T=0.25mm)
SHELL: STAINLESS STEEL (T=0.30mm)
HOUSING: HIGH TEMPERATURE RESISTANT PLASTIC, UL94 V-0.

2. ELECTRICAL PERFORMANCE,


CONTACT RESISTANCE: 30mΩ MAX
CONTACT CURRENT RATING: 3.0 AMPERES
DIELECTRIC WITHSTAND VOLTAGE, 500V R. M. S
INSULATION RESISTANCE: 100MΩ MIN
OPERATING TEMPERATURE: -40° C~+85° C.

3. MECHANICAL PERFORMANCE,




INSERTION FORCE: 3.5kgf Max
REMOVAL FORCE: 1.02kgf Min
DURABILITY: 7500 CYCLES.

4. PLATING SPECIFICATION:

CONTACTS: GOLD PLATED ON CONTACT AREA, Sn ON SOLDER AREA,
NICKEL UNDERPLATED.
SHELL: 80u"MIN BRIGHT NICKEL PLATING OVER ALL,
NICKEL MUST BE SOLD RABILITY.
HOUSING: HIGH TEMPERATURE RESISTANT PLASTIC, UL94 V-0 .

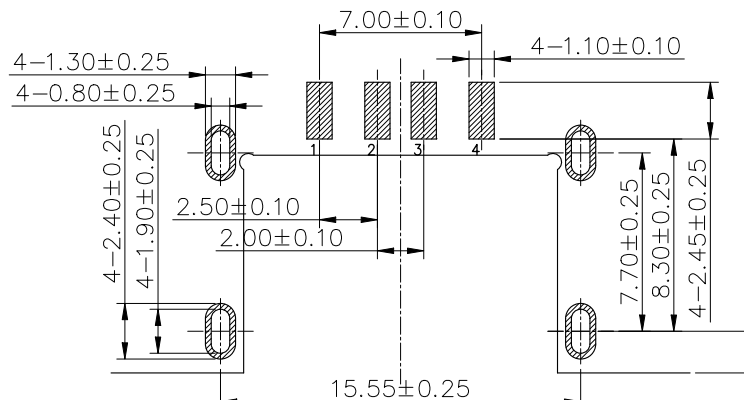

RECOMMENDED P.C.B HOLE LAYOUT
COMPONENT SIDE VIEW (TOLERANCE: +/-0.05)

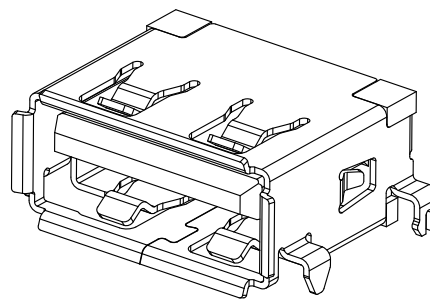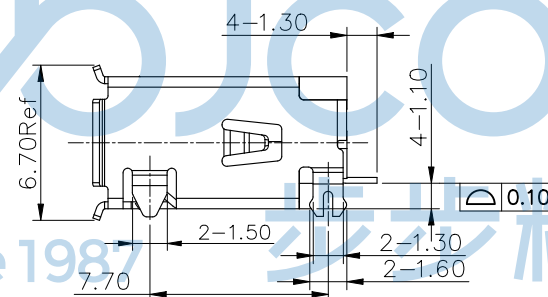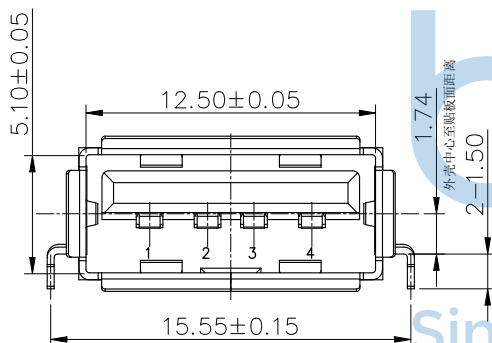

3D(2:1)




Pin Number	Signal Name
1	VBUS
2	D-
3	D+
4	GND

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co., Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
OR IN PART WITHOUT
PRIOR WRITTEN PERMISSION.
PDWG.NO: 0100-2

深圳市步步精科技有限公司


.X: ±0.38 .X': ±3" .XX: ±0.25 .X': ±2" .XXX: ±0.13 .XX': ±1"		NAME: USB 2.0 AF 90度 短体 L=11.15 沉板1.1 四脚插 端子SMT 大电流3A 卷边 LCP黑胶 不锈钢外壳 编带	
APPD.	JM_Zheng	PJ. NO.: 127-273-040001-V2G SIZE: A4 DRW NO.:	FINISH: SEE NOTES MAT'L.: SEE NOTES SCALE: N/A REV.: A0 UNIT: mm PAGE: 1/2
CHKD.	LYX		
DR.	ZY		

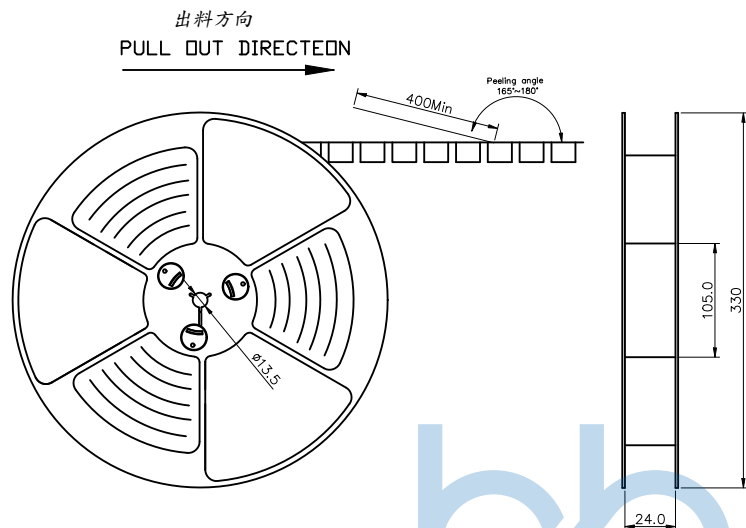


NOTES

1. 帶子引導長度
LEAD TAPE LENGTH

出料方向
PULL OUT DIRECTEON

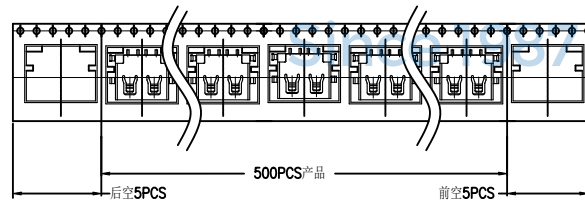

2. 上帶剝力為：0.1~1.3N(10.2gf~130gf)
PEELING OFF FORCE OF TOP TAPE: 0.1~1.3N(10.2gf~130gf)
出貨運輸過程中一定注意：
THIS REQUIREMENT SHOULD BE APPLIED AT SHIPMENT：
卷帶在運輸過程中不能散開
PEELING OFF SHOULD NOT BE ALLOWED DURING TRANSPORTATION


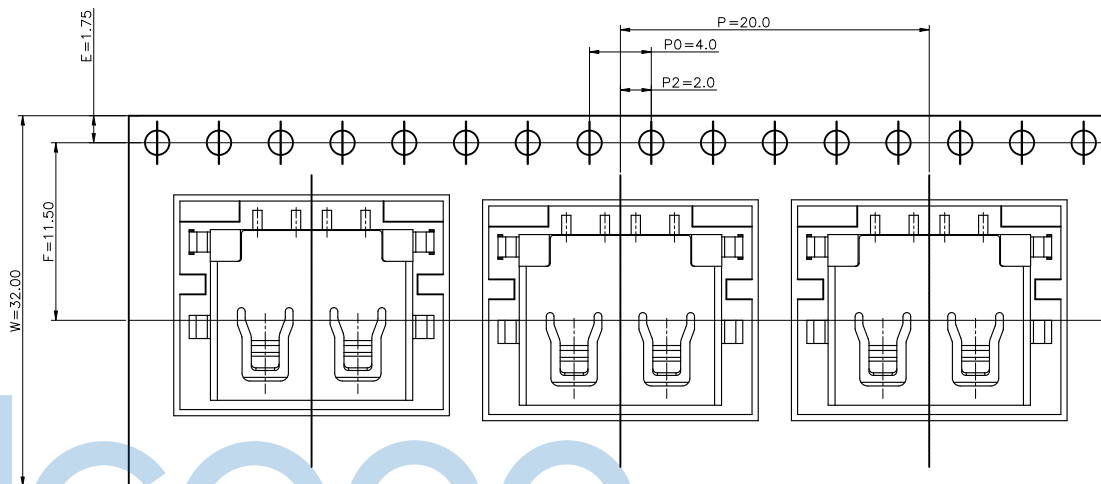


TAPE & REEL 10 PCS

1 REEL
= 500 PCS

BOX

DIMENSIONS:
33.5X33.5X30.5

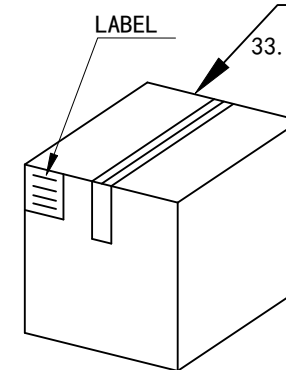

1 CARTON
=10 REELS
=5000 PCS



包裝明細表 (The detail of the packing) Carton					
包裝容量 (Packing Capacity)			重量 (Weight) (Kg)		
pcs/box	boxs/Carton	Pcs/Box	N. W. /Pcs	N. W. /Box	G. W. /Box
500	10	5000	----	----	----



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION. PDWG.NO: 0100-2		深圳市步步精科技有限公司					
		.X: ±0.38 .XX: ±0.25 .XXX: ±0.13		X*: ±3° .X*: ±2° .XX*: ±1°		NAME: USB 2.0 AF 90度 短体 L=11.15 沉板1.1 四脚插 端子SMT 大电流3A 卷边 LCP黑胶 不锈钢外壳 编带	
	APPD.	JM_Zheng			PJ. NO.: 127-273-040001-V2G		
	CHKD.	LYX			SIZE: A4	DRW NO.:	
	FINISH: SEE NOTES		MAT'L.: SEE NOTES				
SCALE: N/A		REV.: A0		UNIT: mm	PAGE: 2/2		