
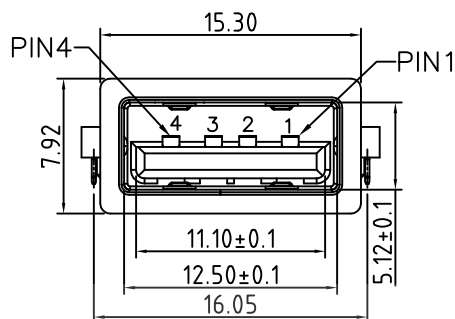
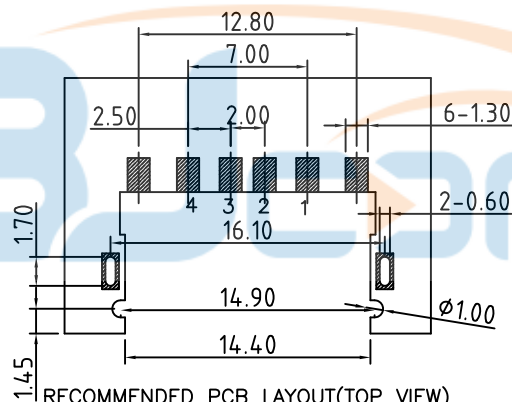


NOTES:

SPECIFICATION:

1. CURRENT RATING: 3.0A MAX
2. DIELECTRIC WITHSTAND VOLTAGE: 100VAC
3. TEMPERATURE RANGE: -30 °C ~ 85 °C
4. CONTACT RESISTANCE: 40 MILLIONHM MAX
5. INSULATION RESISTANCE: 100 MEGOHMS MIN.
6. INSERTION FORCE :8N~35N
7. UNMATING FORCE: 8N~35N
8. DURABILITY:1500 CYCLES

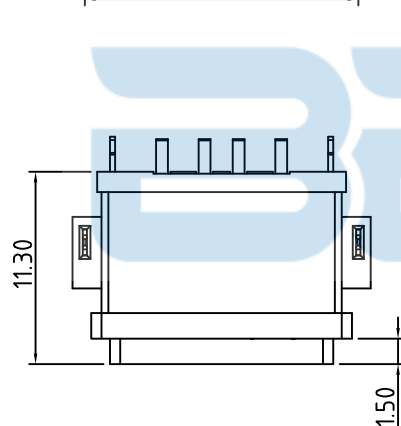

RECOMMENDED PCB LAYOUT(TOP VIEW)

DEFAULT TOLERANCE+/-0.05

THICKNESS T=1.2mm





PIN ASSIGNMENT

PIN NO.	1	2	3	4
SINGAL NAME	VBUS	D-	D+	GND

3	Shell	1	SUS 301 1/4H	
3	PLASTIC Shell	1	PA9T&LCP (G.F30%)	
2	Contact	4	BRASS C2680-EH Au/Ni Plating T=0.25mm	
1	Housing	1	PA10T (G.F30%)	
ITEM	PART NAME	Q'TY	FINISH	NOTE

X.	±0.50	X.*	± 2°	 深圳市步步精科技有限公司	
.X	±0.30	.X*	± 1°		
.XX	±0.10	.XX*	± 0.5°		
.XXX	± 0.05				
TITLE: USB 2.0 180度防水母座 H=11.30 平口 不锈钢壳 PA10T黑胶 侧边带焊片 IPX8					



DRAWN/ DATE	设计	LYX	SIZE:A4	UNIT:MM.	PART. NO:	UB.01.52-13-W001
CHECKED/ DATE	审核	HMY	SCALE: 1:1	PROJECTION		REV.: 版本
APPROVED/ DATE	核准	LJP	DWG. PATH	0388-1	SHEET: 页码	

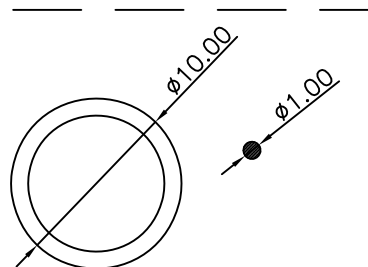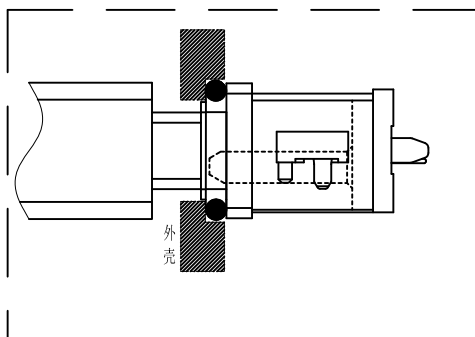

注: 防水圈是圆形截面, 直径为1.0mm的
硅胶圈, 防水圈挤压量, 由1.0mm挤压到
0.4mm ~ 0.5mm, 防水效果好



PE袋规格:***X*** (以实际出货为准)

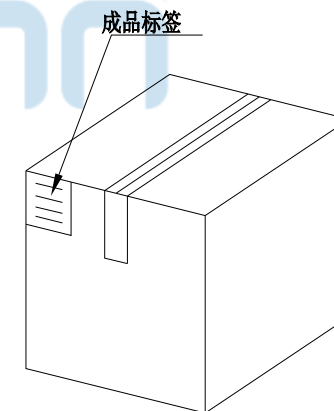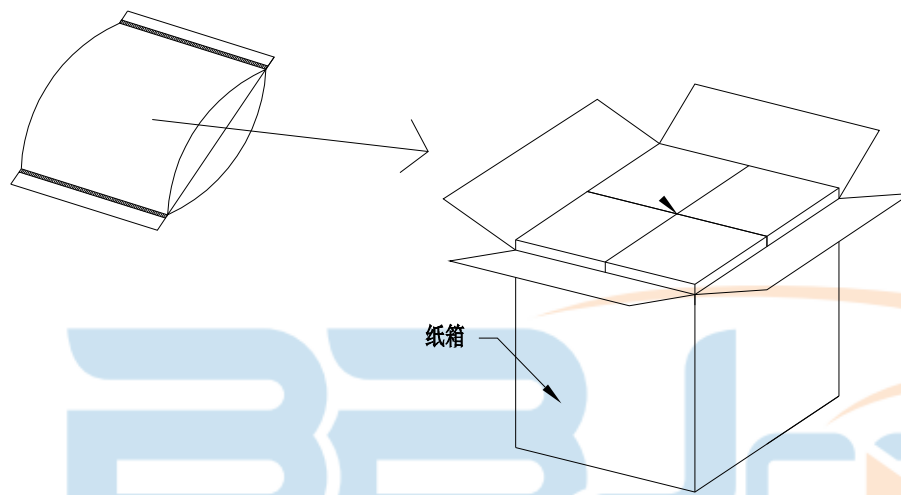

1. 包装要求:

- 1.1 每PE袋包装 300 pcs;
- 1.2 每1袋放一小纸盒;
- 1.3 每20个小纸盒放一个纸箱, 共计6000 PCS
- 1.4 纸箱外贴上标签

TOLERANCE UNSPECIFIED . 0 ±0.35 .00 ±0.25 .000 ±0.15 X. ° ±2.00° CUSTOMER DRAWING			深圳市步步精科技有限公司			
DRAWN/ 设计 LYX DATE			SIZE:A4	UNIT:MM.	PART. NO: UB.01.52-13-W001	
CHECKED/ 审核 HMY DATE			SCALE: 1:1	PROJECTION	REV.: 版本	
APPROVED/ 核准 LJP DATE			DWG. PATH	0388-1	SHEET: 页码	