

REV.	ECN NO	CONTENT	DATE	ENGINEER
A0		Initial release	/	TSP

NOTES:

1. MATERIAL SPECIFICATION:



- 1) HOUSING MATERIAL: LCP 防火94V0 ROHS;
- 2) SHELL MATERIAL: SPCC T=0.30
PLATING: NICKEL;
- 3) TERMINAL: C5191 T=0.25
PLATING: SEMI GOLD TIN G/F;

2. ELECTRICAL CHARACTERISTIC:





- 1) INSULATION RESISTANCE: 1000MΩ MIN;
- 2) CONTACT RESISTANCE: 30mΩ MAX;
- 3) WITHSTANDING VOLTAGE: 500V AC;

3. MECHANICAL CHARACTERISTICS:


- 1) INSERTION FORCE: 3.57Kgf Max;
- 2) EXTRACTION FORCE: 1.02Kgf Min;

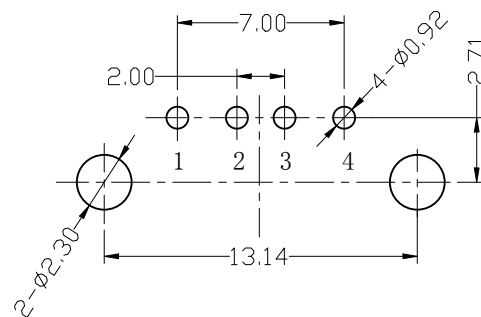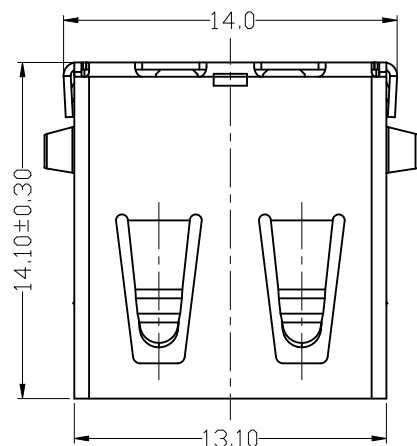

RECOMMEND P. C. B. LAYOUT
TOLERANCE ±0.05

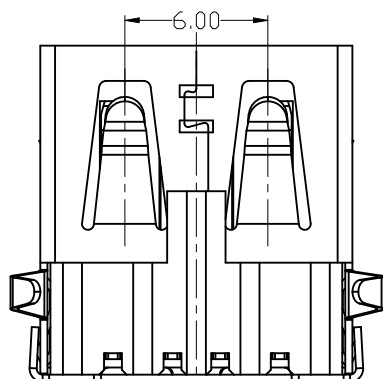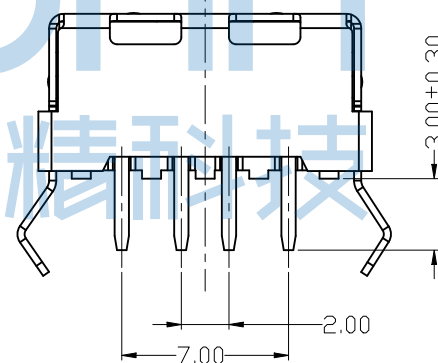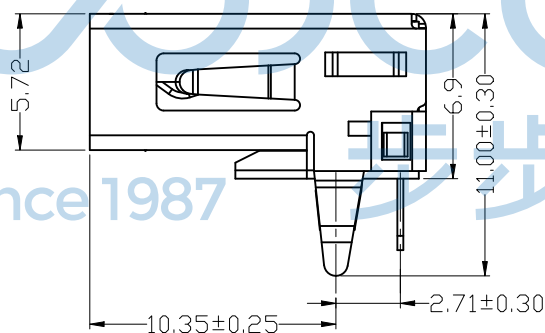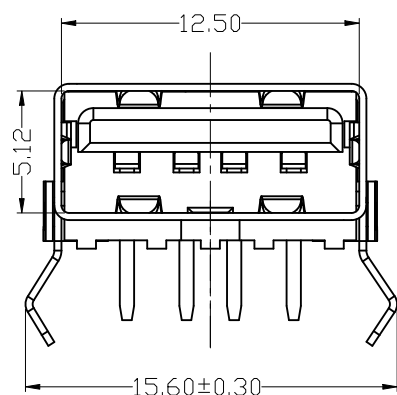

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co., Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司		NAME: USB 2.0 AF 90度 L=14.10 H=6.90 有盖 后两脚弯插 脚距15.60 端子DIP 平口 LCP黑胶 铁壳	
.X: ±0.38 .XX: ±0.25 .XXX: ±0.13		X*: ±3* .X*: ±2* .XX*: ±1*		PJ. NO.: UB.01.12-11-4004	
APPD.		JM_Zheng		SIZE: A4 DRW NO.:	
CHKD.		LYX		FINISH: SEE NOTES MAT'L.: SEE NOTES	
PDWG.NO: 0036-1		DR. TSP		SCALE: N/A REV.: A0 UNIT: mm PAGE: 1/2	

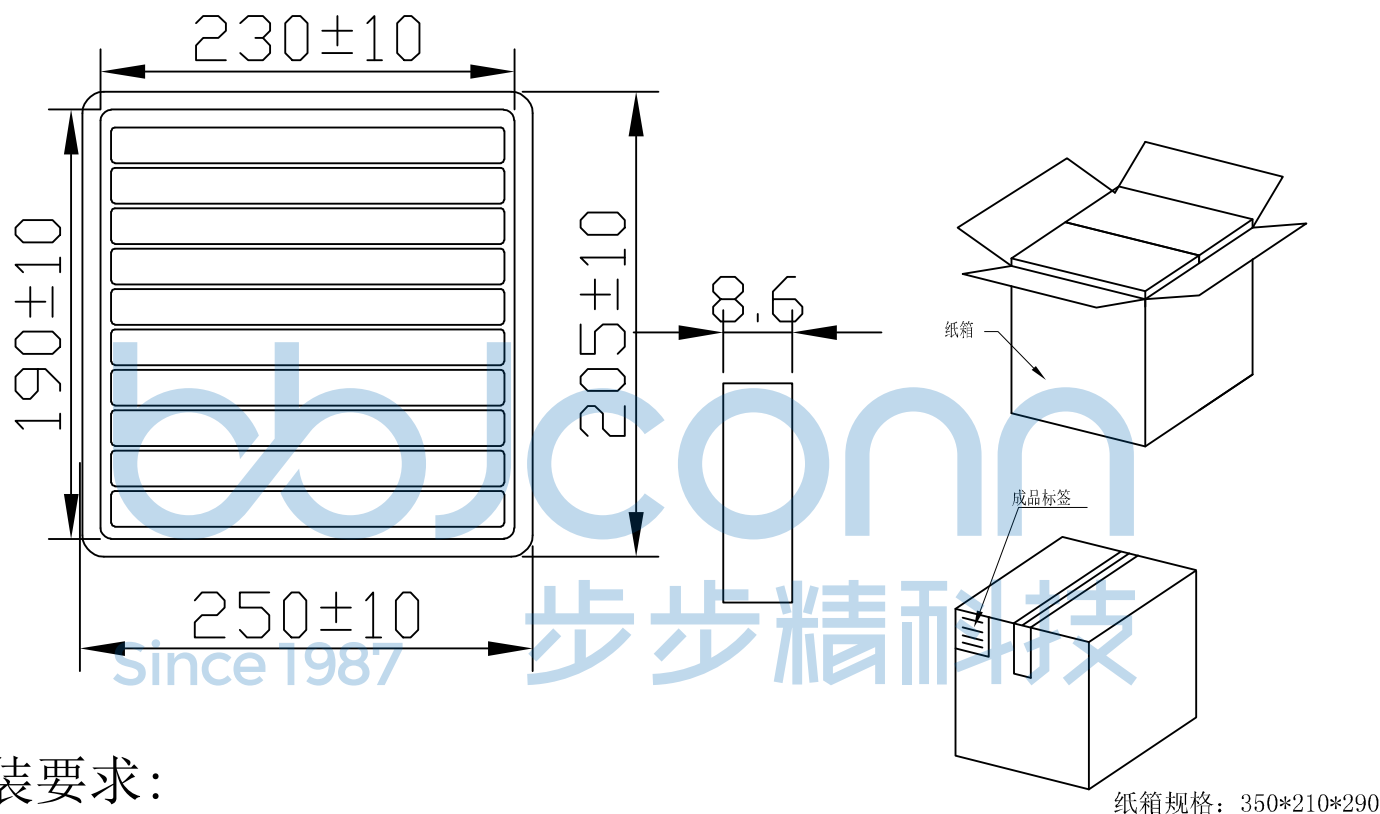

1. 包装要求:
- 1.1 每盒吸塑盒包装100pcs;
- 1.2 每20盘放一箱, 共计2000PCS;
- 1.3 纸箱外贴上标签。

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司	
PDWG.NO: 0036-1		NAME: USB 2.0 AF 90度 L=14.10 H=6.90 有盖 后两脚弯插 脚距15.60 端子DIP 平口 LCP黑胶 铁壳	
APPD.	JM_Zheng	PJ. NO.:	UB.01.12-11-4004
CHKD.	LYX	SIZE: A4	DRW NO.:
DR.	TSP	FINISH: SEE NOTES	MAT'L.: SEE NOTES
		SCALE: N/A	REV.: A0 UNIT: mm PAGE: 2/2