



REV.	DESCRIPTION	NAME	DATE
A	NEWS ISSUE		

NOTES:

1. MATERIAL SPECIFICATION:


- 1) HOUSING MATERIAL: WHITE PBT ROHS.
- 2) SHELL MATERIAL: SPCC T: 0.30mm PLATING NICKEL.
- 3) BACK COVER MATERIAL: SPCC T: 0.30mm PLATING NICKEL.
- 4) SHRAPNEL MATERIAL: C2680. T: 0.30mm PLATING NICKEL.
- 5) TERMINAL: C5191 T: 0.25mm PLATING: SEMI GOLD TIN G/F.

2. ELECTRICAL CHARACTERISTIC:

- 1) VOLTAGE CURRENT RATING: 1AMP, 30V DC;
- 2) INSULATION RESISTANCE: 1000MΩ MIN;
- 3) CONTACT RESISTANCE: 30mΩ MAX;
- 4) WITHSTANDING VOLTAGE: 500V AC;

3. MECHANICAL:

- 1) MATING FORCE: 3.57 KG MAX
- 2) UNMATING FORCE: 1.02 KG MIN.

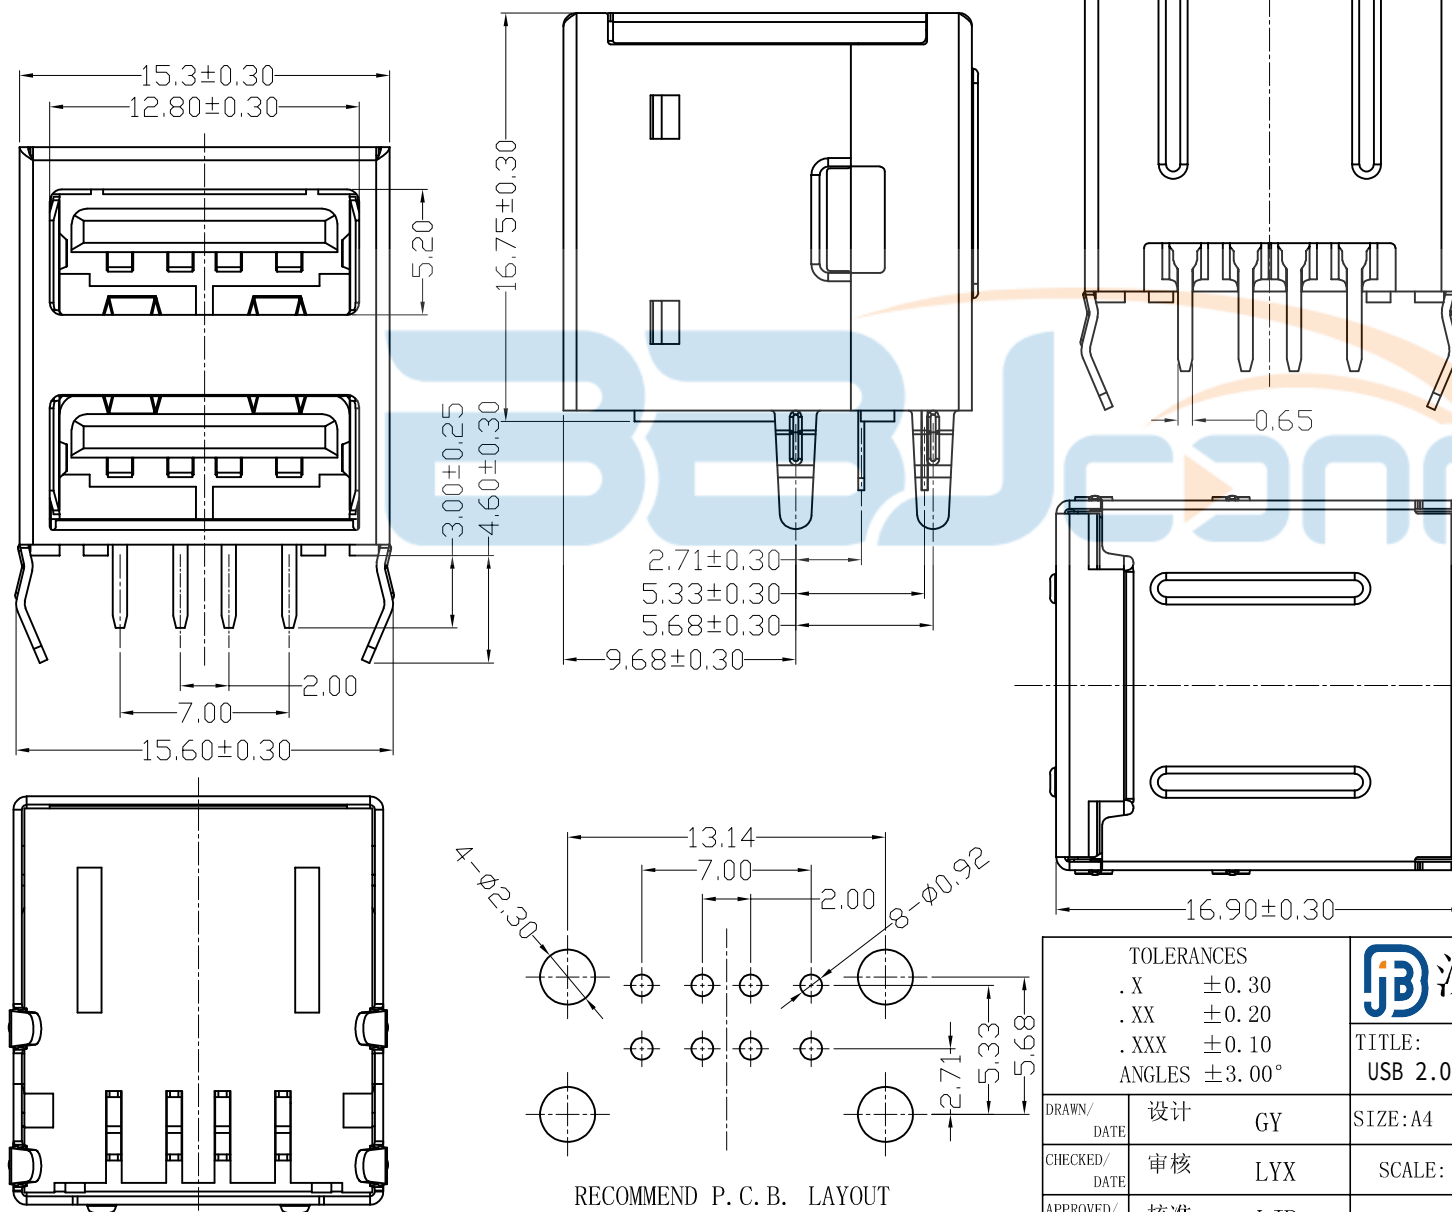

TOLERANCES				深圳市步步精科技有限公司			
.X	±0.30			TITLE:			
.XX	±0.20			USB 2.0 AF 90度 双层 L=16.90 全包 弯脚 平口 PBT白胶 铁壳			
.XXX	±0.10			DRAWN/ DATE	设计 GY	SIZE: A4	UNIT: MM.
ANGLES	±3.00°			CHECKED/ DATE	审核 LYX	PART. NO: UB.01.12-21-4002	PROJECTION
				APPROVED/ DATE	核准 LJP	SCALE: 1:1	REV.: 版本
						DWG. PATH	SHEET: 页码
							0036-1

