

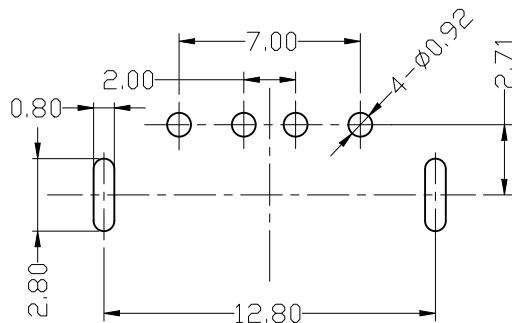
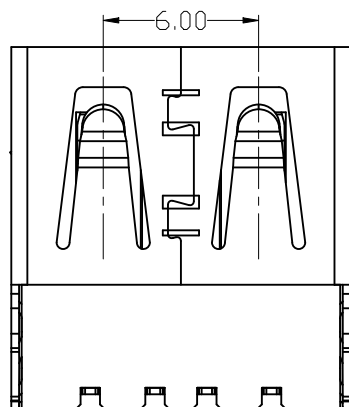
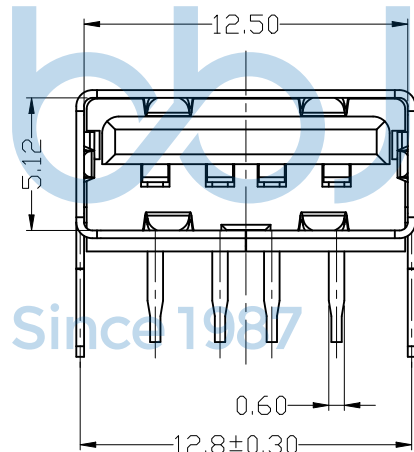
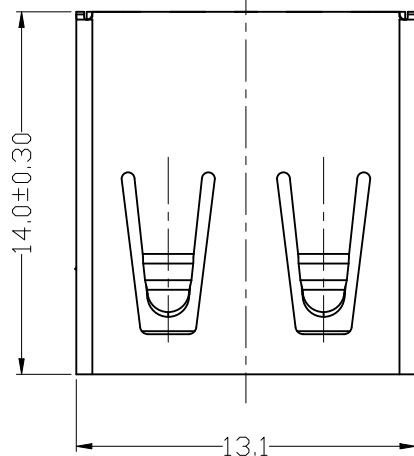


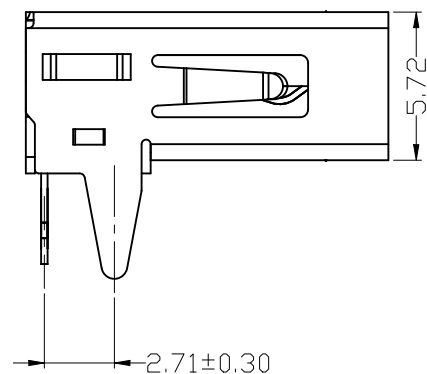

RECOMMEND P. C. B. LAYOUT

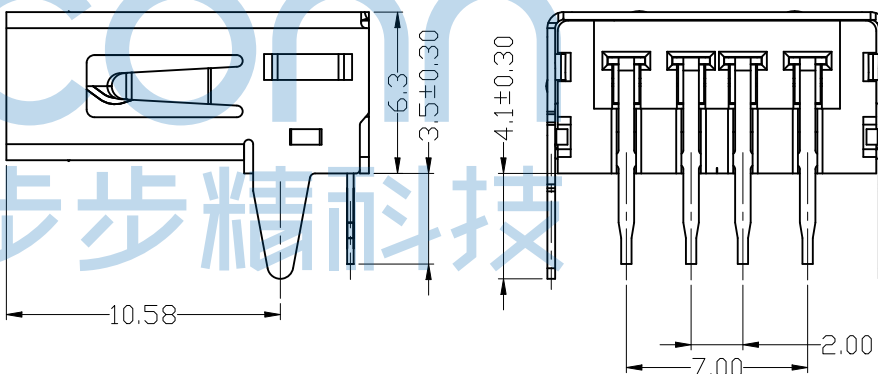


REV.	ECN NO	CONTENT	DATE	ENGINEER
A0		Initial release	/	TSP

NOTES:

- MATERIAL SPECIFICATION:
 - HOUSING: PBT/LCP UL94V-0.
 - SHELL: COPPER ALLOY C2680/SPCC T=0.30mm
 - CONTACT: COPPER ALLOY C5191 T=0.25mm
- PLATING:
 - CONTACT :
 - G/F GOLD PLATING ON CONTACT AREA
 - 80~100u".Bright Tin PLATING ON SOLDER TAILS
 - 50u"Min.Nickel UNDERPLATING OVER ALL
 - SHELL: 50u"Min.Nickel Underplated Over All
- ELECTRICAL CHARACTERISTIC:
 - CURRENT RATING: 1.5A;
 - INSULATION RESISTANCE: 1000MΩ,MIN;
 - CONTACT RESISTANCE: 30mΩ,MAX;
 - DIELECTRIC WITHSTANDING VOLTAGE: 500V AC;
- MACHINE CHARACTERISTICS:
 - MATING FORCE:3.57 KgF MAX
 - UNMATING FORCE:1.02 KgF MIN.

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司	
.X: ±0.38 .XX: ±0.25 .XXX: ±0.13		X*: ±3* .X*: ±2* .XX*: ±1*	
APPD. JM_Zheng		NAME: USB 2.0 AF 90度 L=14.0 H=6.30 后两脚插一型直脚 端子DIP 无后盖 平口 PBT白胶 铜壳	
CHKD. LYX		PJ. NO.: UB.01.12-22-4001	
DR. TSP		SIZE: A4 DRW NO.:	
PDWG.NO: 0036-1		FINISH: SEE NOTES MAT'L.: SEE NOTES	
		SCALE: N/A REV.: A0 UNIT: mm PAGE: 1/2	

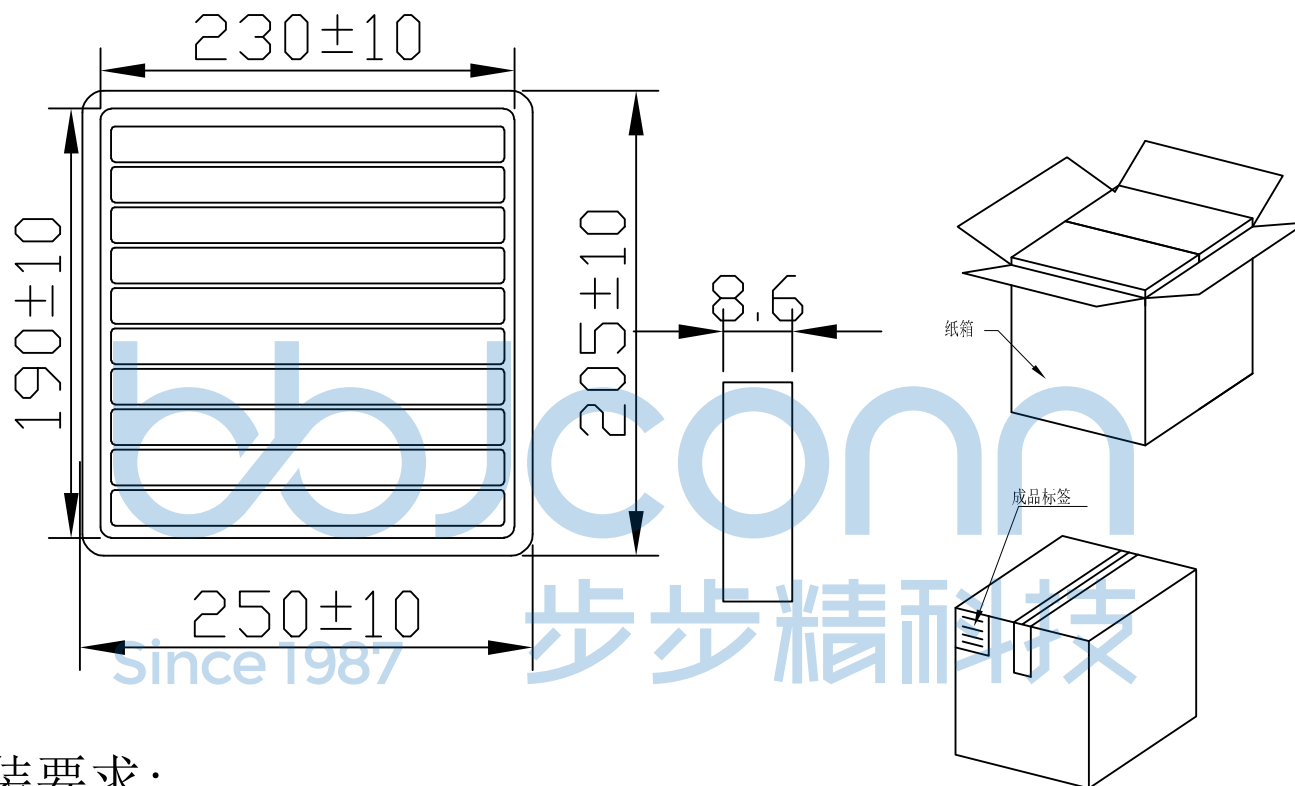

1. 包装要求:

- 1.1 每盒吸塑盒包装100pcs;
- 1.2 每20盘放一箱, 共计2000PCS;
- 1.3 纸箱外贴上标签。

纸箱规格: 350*210*290

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司	
PDWG.NO: 0036-1		NAME: USB 2.0 AF 90度 L=14.0 H=6.30 后两脚插一型直脚 端子DIP 无后盖 平口 PBT白胶 铜壳	
APPD.	JM_Zheng	PJ. NO.: UB.01.12-22-4001	
CHKD.	LYX	SIZE: A4 DRW NO.:	
DR.	TSP	FINISH: SEE NOTES	MAT'L.: SEE NOTES
		SCALE: N/A	REV.: A0 UNIT: mm PAGE: 2/2