

| REV. | ECN NO | CONTENT         | DATE | ENGINEER |
|------|--------|-----------------|------|----------|
| A0   |        | Initial release | /    | LYL      |

规格型号: Specifications:

电气特性: Electrical:

1. 额定电流: Current Rating  
1.5A/contact terminal
2. 额定电压: Voltage Rating  
30V DC
3. 接触阻抗: Contact Resistance  
30 milliohms MAX
4. 耐电压: Dielectric Withstanding Voltage:  
500 V AC AT Sea Level
5. 阻抗: Insulation Resistance:  
1000MEGA ohms MIN

物理性能: Mechanical:

1. 插拔力: Connector Mate and Unmate Force  
Mate force: 3.57kgf (MAX)  
Unmate force: 1.02kgf (MIN)
2. 端子保持力: Terminal Retention  
1.0kgf (MIN)


原材料: Material:

1. 塑膠: Housing:  
Hing Temperature Tnermaplastics,  
LCP Black
2. 端子: Contact: Copper Alloy C2680
3. 外壳: Shell: Copper Alloy SPCC


1. 端子: Contact: Plated Gold in Mating Area:  
Tin On Solder Talls

端子四周鍍30U" (MIN) 錫, 鍍金区域鍍100-200U" 鍍金1U"

2. 外壳: Shell:  
外壳四周鍍80U" (MIN) 镍  
Nickel Plating

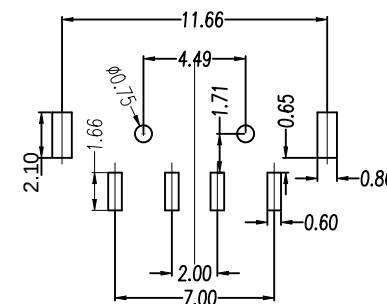


RECOMMENDED P.C.B. LAYOUT

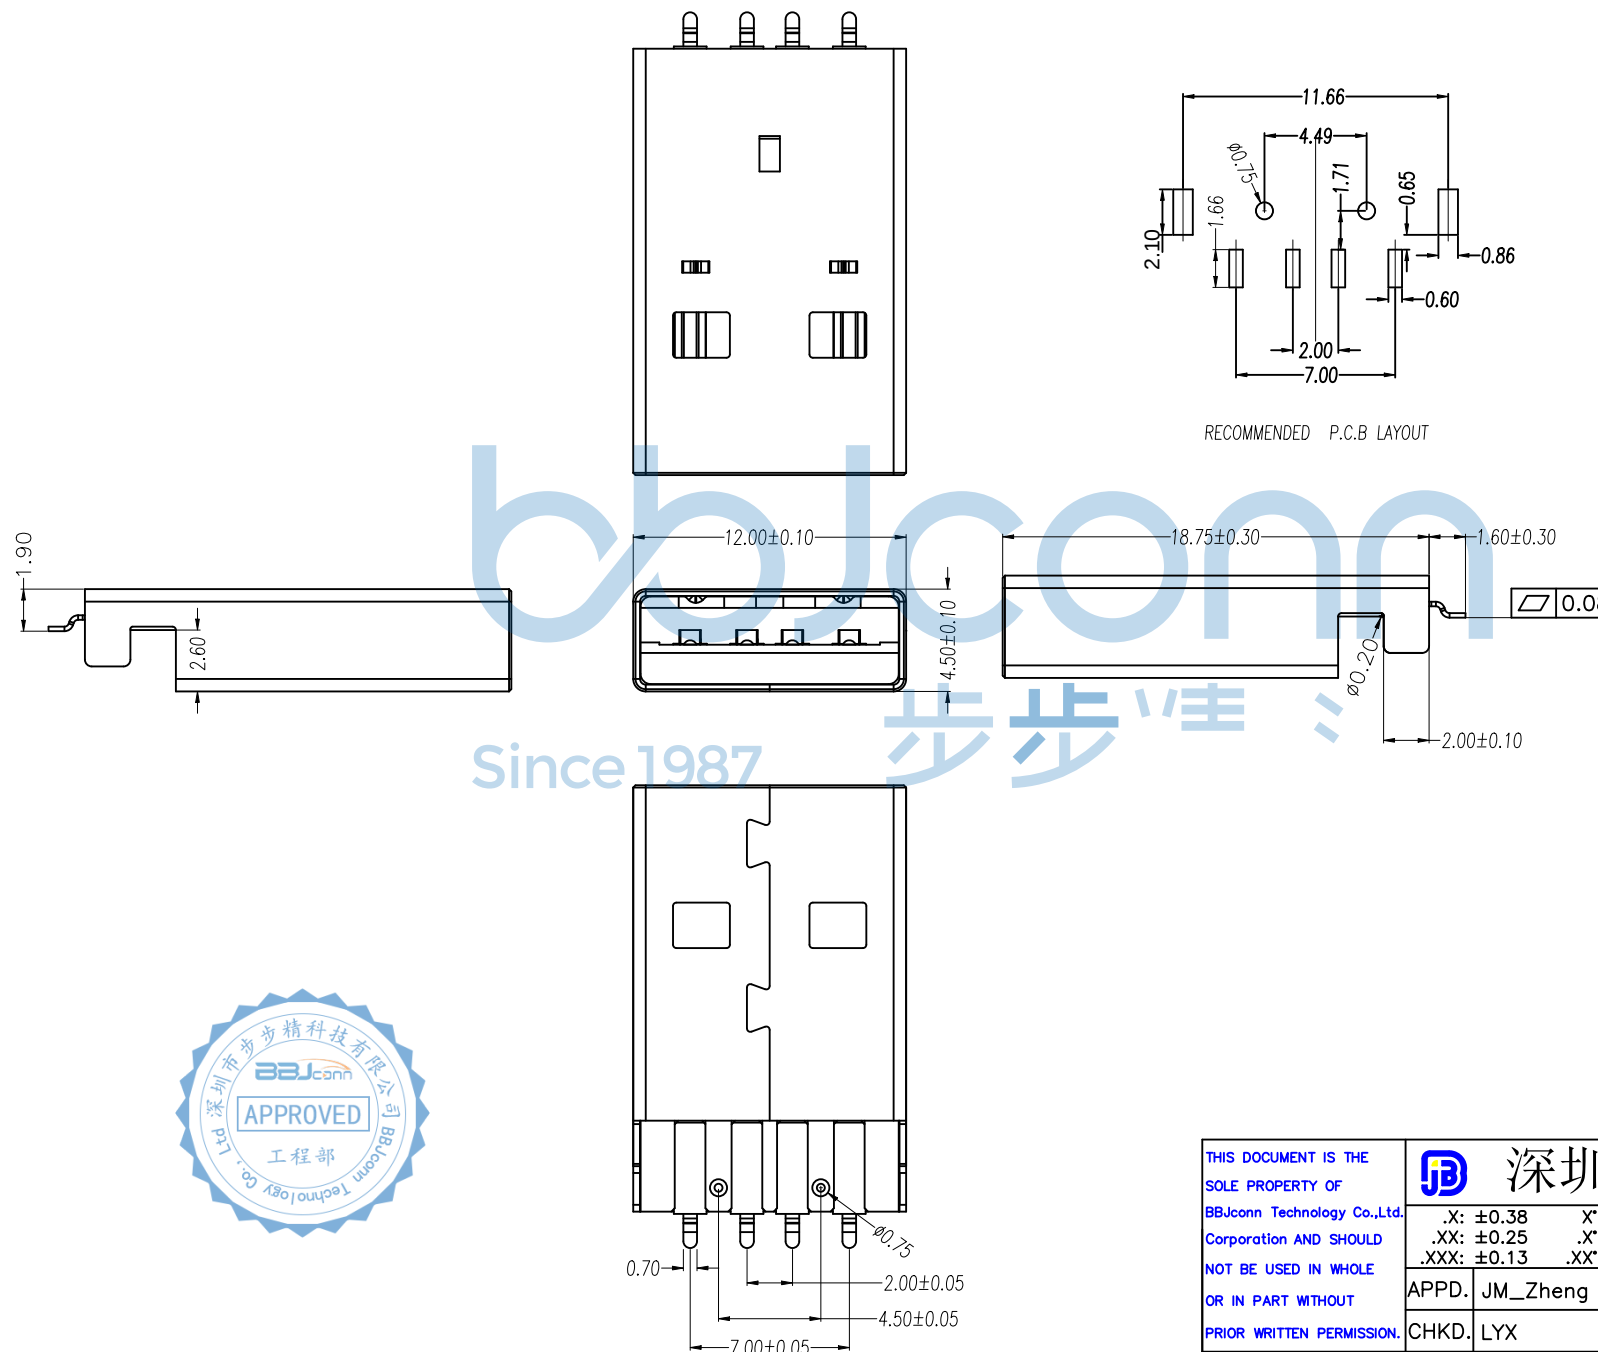


|                                                                                                                                                                               |  |                                                                                                                                                                                                                                   |  |                                                                  |  |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|------------------------------------------------------------------|--|
| THIS DOCUMENT IS THE<br>SOLE PROPERTY OF<br>BBJconn Technology Co., Ltd.<br>Corporation AND SHOULD<br>NOT BE USED IN WHOLE<br>OR IN PART WITHOUT<br>PRIOR WRITTEN PERMISSION. |  |  深圳市步步精科技有限公司                                                                                                                                |  | NAME: USB 2.0 公头 180度 卧式直脚 L=18.75<br>沉板2.6 带柱 端子SMT 平口 LCP黑胶 铁壳 |  |
| .X: ±0.38<br>.XX: ±0.25<br>.XXX: ±0.13                                                                                                                                        |  | X': ±3"<br>.X': ±2"<br>.XX': ±1"                                                                                                                                                                                                  |  | APPD. JM_Zheng<br>CHKD. LYX<br>DR. LYL                           |  |
| PDWG,NO: 0383-1                                                                                                                                                               |  |  PJ. NO.: 127-175-040001-W7G<br>SIZE: A4   DRW NO.:<br>FINISH: SEE NOTES   MAT'L.: SEE NOTES<br>SCALE: N/A   REV.: A0   UNIT: mm   PAGE: 1/2 |  |                                                                  |  |


1. 把已全檢好的 USB AF 180度公头系列 成品, 装入專用的吸塑盘內, 每盤裝100PCS;

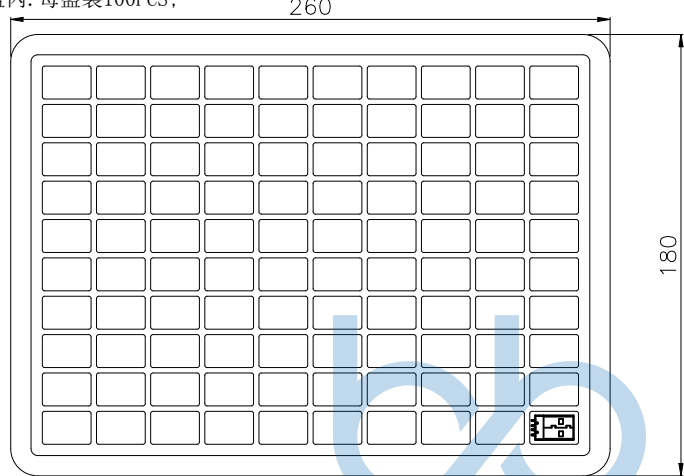


2. 产品放滿100PCS 后, 盖上下盖后使用订书机鎖边, 然后层叠10盘打包1摞1000PCS的), 并用打包模捆好(如下图).

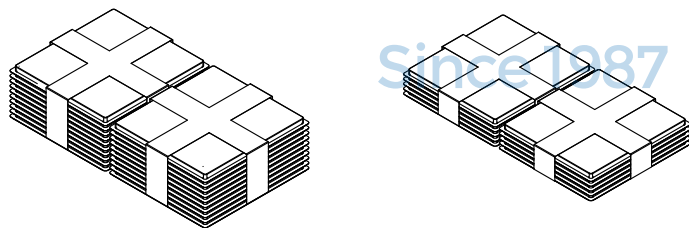

3. 将叠好的产品, 按圖示用PE模捆扎, 后装入紙箱, 每箱裝6摞, 6000PCS

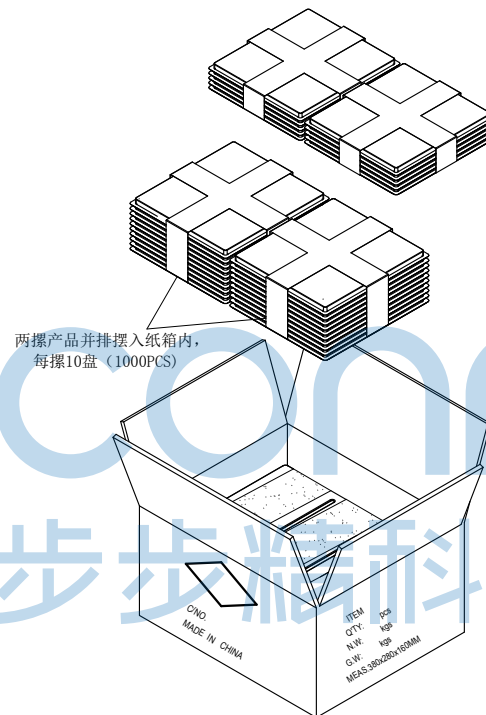

4. 外箱規格及外箱標籤貼附要求.  
(客戶指定要求之標籤及規格參照“客戶包裝規範”)

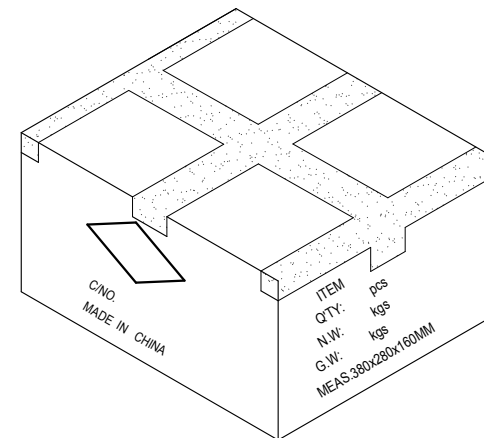

尺寸: 380\*280\*160mm



| 包材清單: |     |        |        | 包裝數量 |           |
|-------|-----|--------|--------|------|-----------|
| 品名規格: | 料 号 | 單重 (g) | 數量     | 成品單重 | G/PCS     |
| 吸塑盒下盤 |     |        | 60 PCS |      | 100PCS/盒  |
| 吸塑盒上蓋 |     |        | 60 PCS |      |           |
| 紙箱    |     |        | 1 PCS  |      | 6000PCS/箱 |

|                                                                                                                                                             |  |  |                                  |  |  |                                                                  |  |  |  |  |  |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------|--|--|----------------------------------|--|--|------------------------------------------------------------------|--|--|--|--|--|
| THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co., Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION. |  |  |                                  |  |  | 深圳市步步精科技有限公司                                                     |  |  |  |  |  |
| .X: ±0.38<br>.XX: ±0.25<br>.XXX: ±0.13                                                                                                                      |  |  | X*: ±3*<br>.X*: ±2*<br>.XX*: ±1* |  |  | NAME: USB 2.0 公头 180度 卧式直脚 L=18.75<br>沉板2.6 带柱 端子SMT 平口 LCP黑胶 铁壳 |  |  |  |  |  |
| APPD.                                                                                                                                                       |  |  | JM_Zheng                         |  |  | P.J. NO.: 127-175-040001-W7G                                     |  |  |  |  |  |
| CHKD.                                                                                                                                                       |  |  | LYX                              |  |  | SIZE: A4 DRW NO.:                                                |  |  |  |  |  |
| DR.                                                                                                                                                         |  |  | LYL                              |  |  | FINISH: SEE NOTES MAT'L.: SEE NOTES                              |  |  |  |  |  |
| PDWG,NO: 0383-1                                                                                                                                             |  |  |                                  |  |  | SCALE: N/A REV.: A0 UNIT: mm PAGE: 2/2                           |  |  |  |  |  |