

REV.	ECN NO.	CONTENT	DATE	ENGINEER
A0		Initial release	/	TSP

备注:

1. 材质:

1-1 塑胶: PBT/LCP

1-2 端子: 黄铜C2680

1-3 外壳: C2680/SPCC

2. 电镀:

端子接触区域: 镀金G/F

端子锡脚: 镀锡80u"min.

端子整个表面: 镀镍40u"min.

铁壳: 镀镍80u"min

3. 电气性能:

3-1 耐电压: 500V 交流电

3-2 接触电阻: 50 毫欧 最大

3-3 绝缘阻抗: 500 兆欧最小

3-4 额定电流: 1.5A






4. 机械性能

4-1 插入力: 3.5kgf MAX


4-2 拨出力: 0.8kgf MIN

5. 环境

温度范围: -20° C TO +65° C

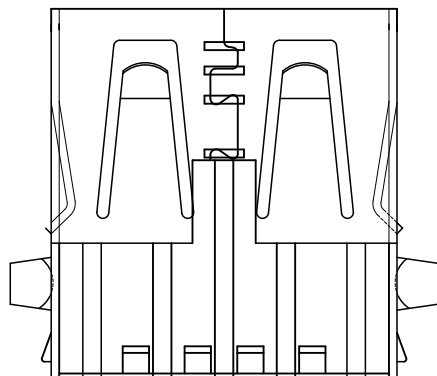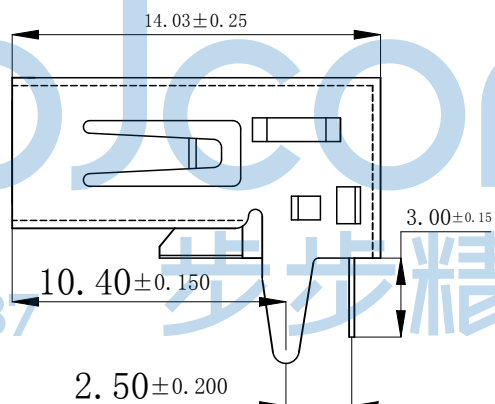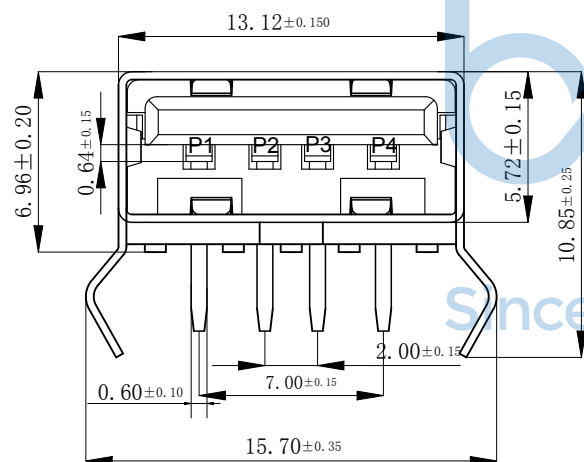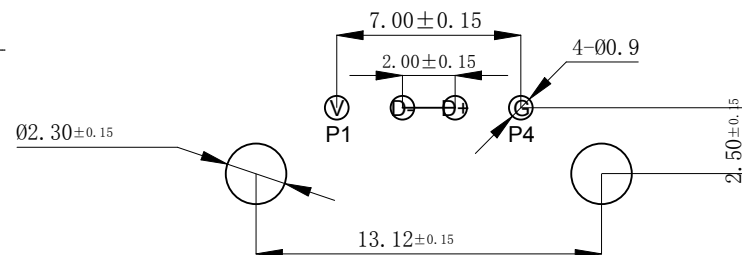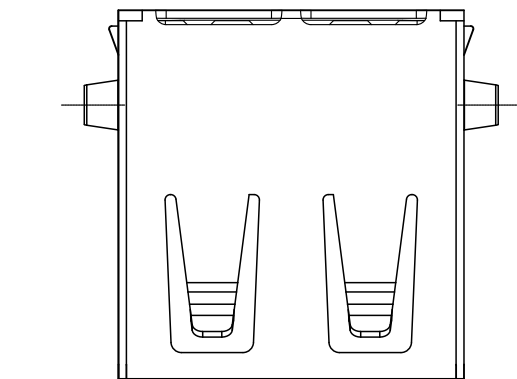

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司		NAME:USB 2.0 AF 90度 L=14.03 H=6.96 后两脚插弯脚 端子DIP 平口 LCP白胶无卤 铁壳	
.X: ±0.38 .XX: ±0.25 .XXX: ±0.13		X*: ±3* .X*: ±2* .XX*: ±1*		APPD. JM_Zheng	
PDWG:NO: 0383-1		CHKD. LYX		DR. TSP	
				PJ. NO.: 127-272-040001-W7H	
				SIZE: A4 DRW NO.:	
				FINISH: SEE NOTES MAT'L.: SEE NOTES	
				SCALE: N/A REV.: A0 UNIT: mm PAGE: 1/2	

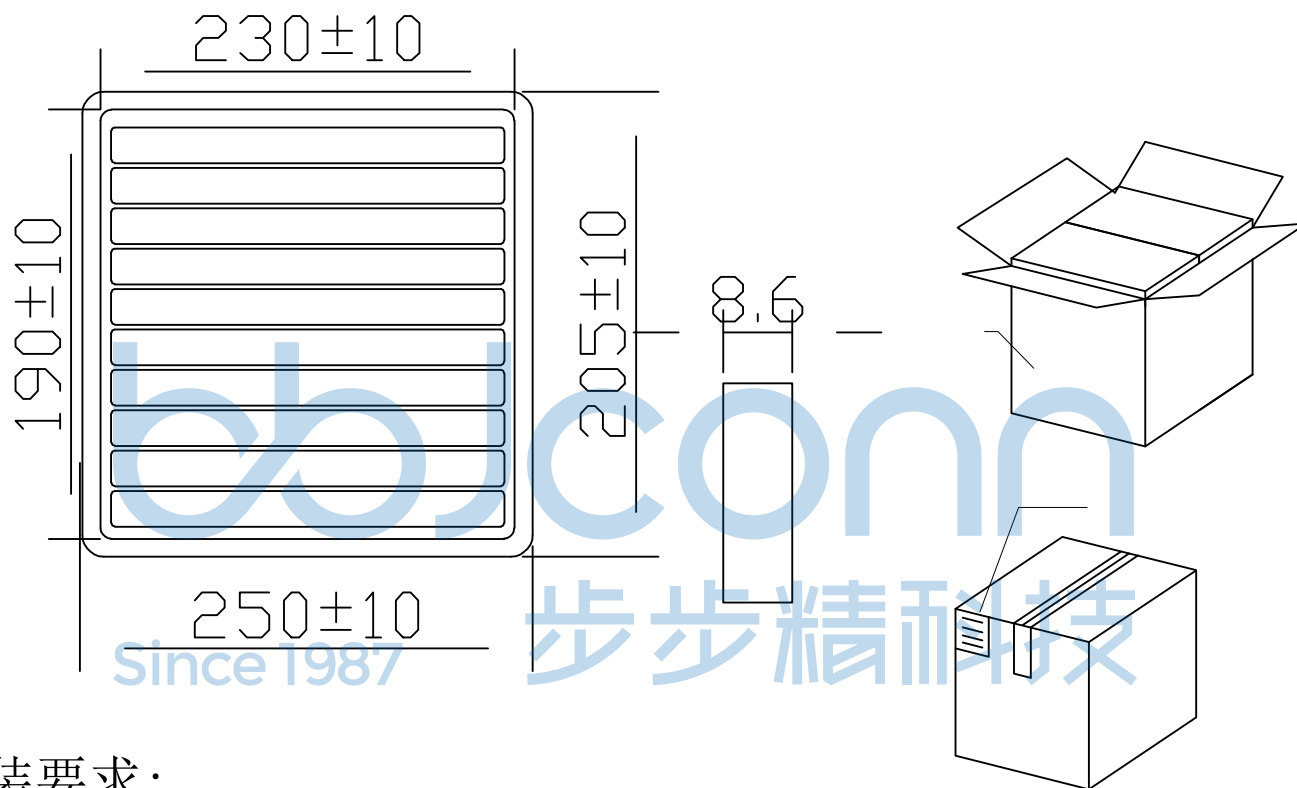

1. 包装要求:
- 1.1 每盒吸塑盒包装100pcs;
 - 1.2 每20盘放一箱, 共计2000PCS;
 - 1.3 纸箱外贴上标签。

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司		NAME:USB 2.0 AF 90度 L=14.03 H=6.96 后两脚插弯脚 端子DIP 平口 LCP白胶无卤 铁壳	
.X: ±0.38 .XX: ±0.25 .XXX: ±0.13		X*: ±3" .X*: ±2" .XX*: ±1"		PJ. NO.: 127-272-040001-W7H	
APPD. JM_Zheng		CHKD. LYX		SIZE: A4 DRW NO.:	
PDWG.NO: 0383-1		DR. TSP		FINISH: SEE NOTES MAT'L.: SEE NOTES	
				SCALE: N/A REV.: A0 UNIT: mm PAGE: 2/2	