



REV.	ECN NO.	CONTENT	DATE	ENGINEER
AO				

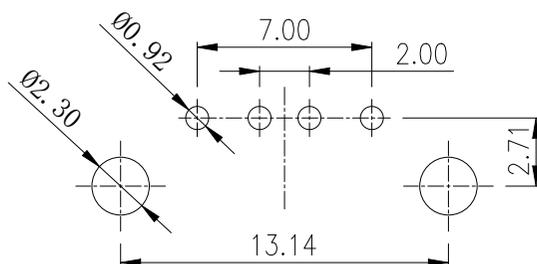

Recommend PCB layout

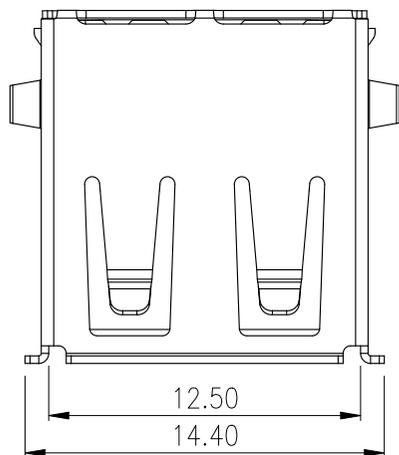

注:

1. 机械性能:

插入力: 35N Max.

拔出力: 10N Min.

耐插拔: 3000 次

工作温度: 0°C ~ +50°C

储存温度: -20°C ~ 60°C






2. 电性能:

额定电流: 1.5A Max.

接触阻抗: 30 mΩ Max.

耐高压: 500V AC Min.

绝缘阻抗: 1000 MΩ Min.

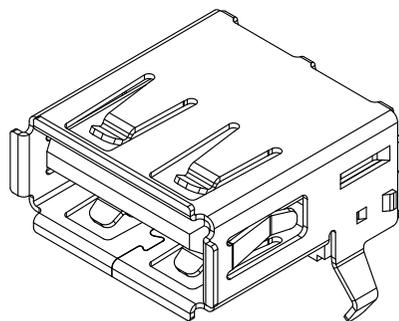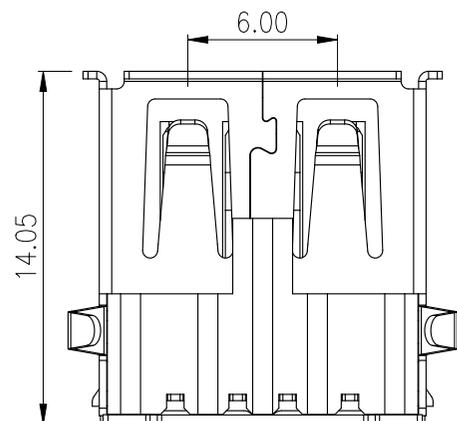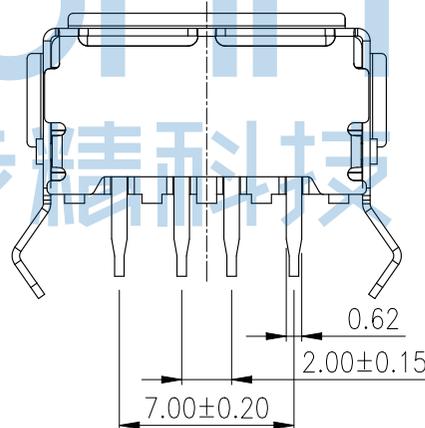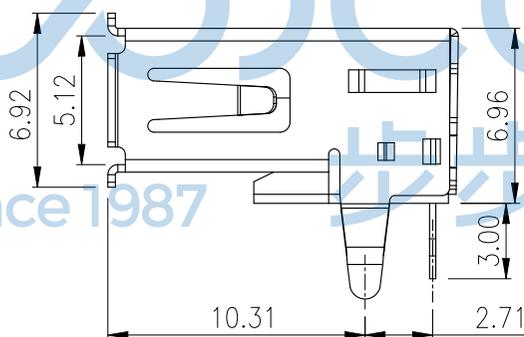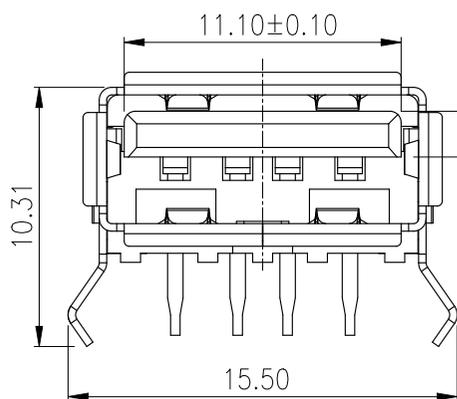

黑胶 铜	C2680, 镀镍80u"	LCP V0, 黑色	C2680-EH, T=0.25, 镀金30u
白胶 铜			
黑胶 铁	SPCC, 镀镍80u"	LCP V0, 本色	C2680-EH, T=0.25, 镀金30u
白胶 铁			
规格	外壳 (1)	胶体 (2)	端子 (3)

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co., Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.

PDWG.NO: 0383-1

APPD. JM\_Zheng  
CHKD. LYX  
DR. TSP


**深圳市步步精科技有限公司**

NAME: USB 2.0 AF 90度 L=14.05 H=6.96 后两脚插弯脚 端子DIP 卷边 LCP黑色 铜壳 端子镀金30U

PJ. NO.:  
SIZE: A4 DRW NO.:

FINISH: SEE NOTES MAT'L.: SEE NOTES

SCALE: N/A REV.: AO UNIT: mm PAGE: 1/2

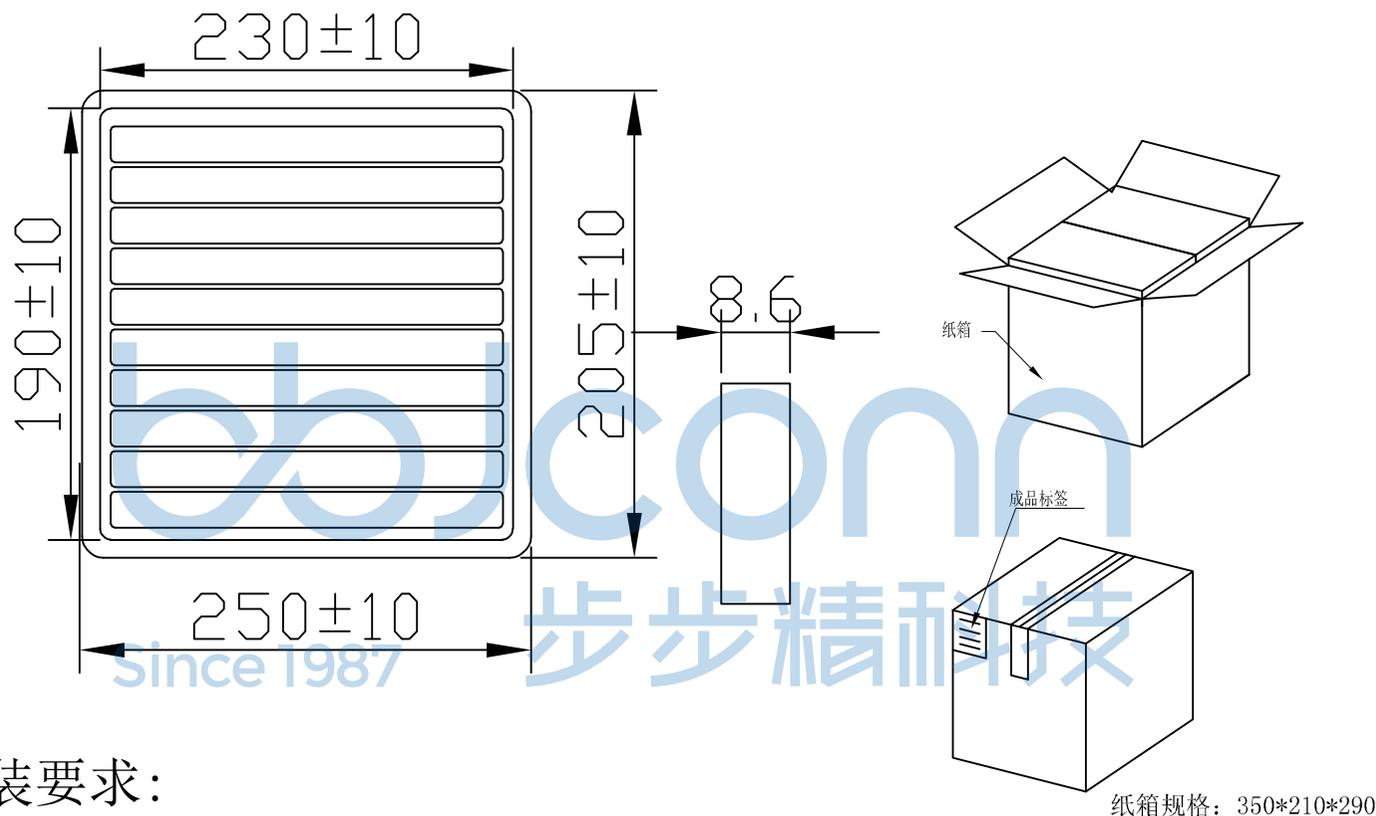

1. 包装要求:

- 1.1 每盒吸塑盒包装100pcs;
- 1.2 每20盘放一箱, 共计2000PCS;
- 1.3 纸箱外贴上标签。

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION. PDWG.NO: 0383-1	深圳市步步精科技有限公司		NAME: USB 2.0 AF 90度 L=14.05 H=6.96 后两脚插 弯脚 端子DIP 卷边 LCP黑色 铜壳 端子镀金30U		
	.X: ±0.38    .X': ±3' .XX: ±0.25    .X': ±2' .XXX: ±0.13    .XX': ±1'		PJ. NO.: SIZE: A4   DRW NO.:		
	APPD.	JM_Zheng	FINISH: SEE NOTES    MAT'L.: SEE NOTES		
	CHKD.	LYX	SCALE: N/A	REV.: AO	UNIT: mm