


REV	ECN NO	CONTENT	DATE	ENGINEER
A0		INITIAL RELEASE	/	LYX

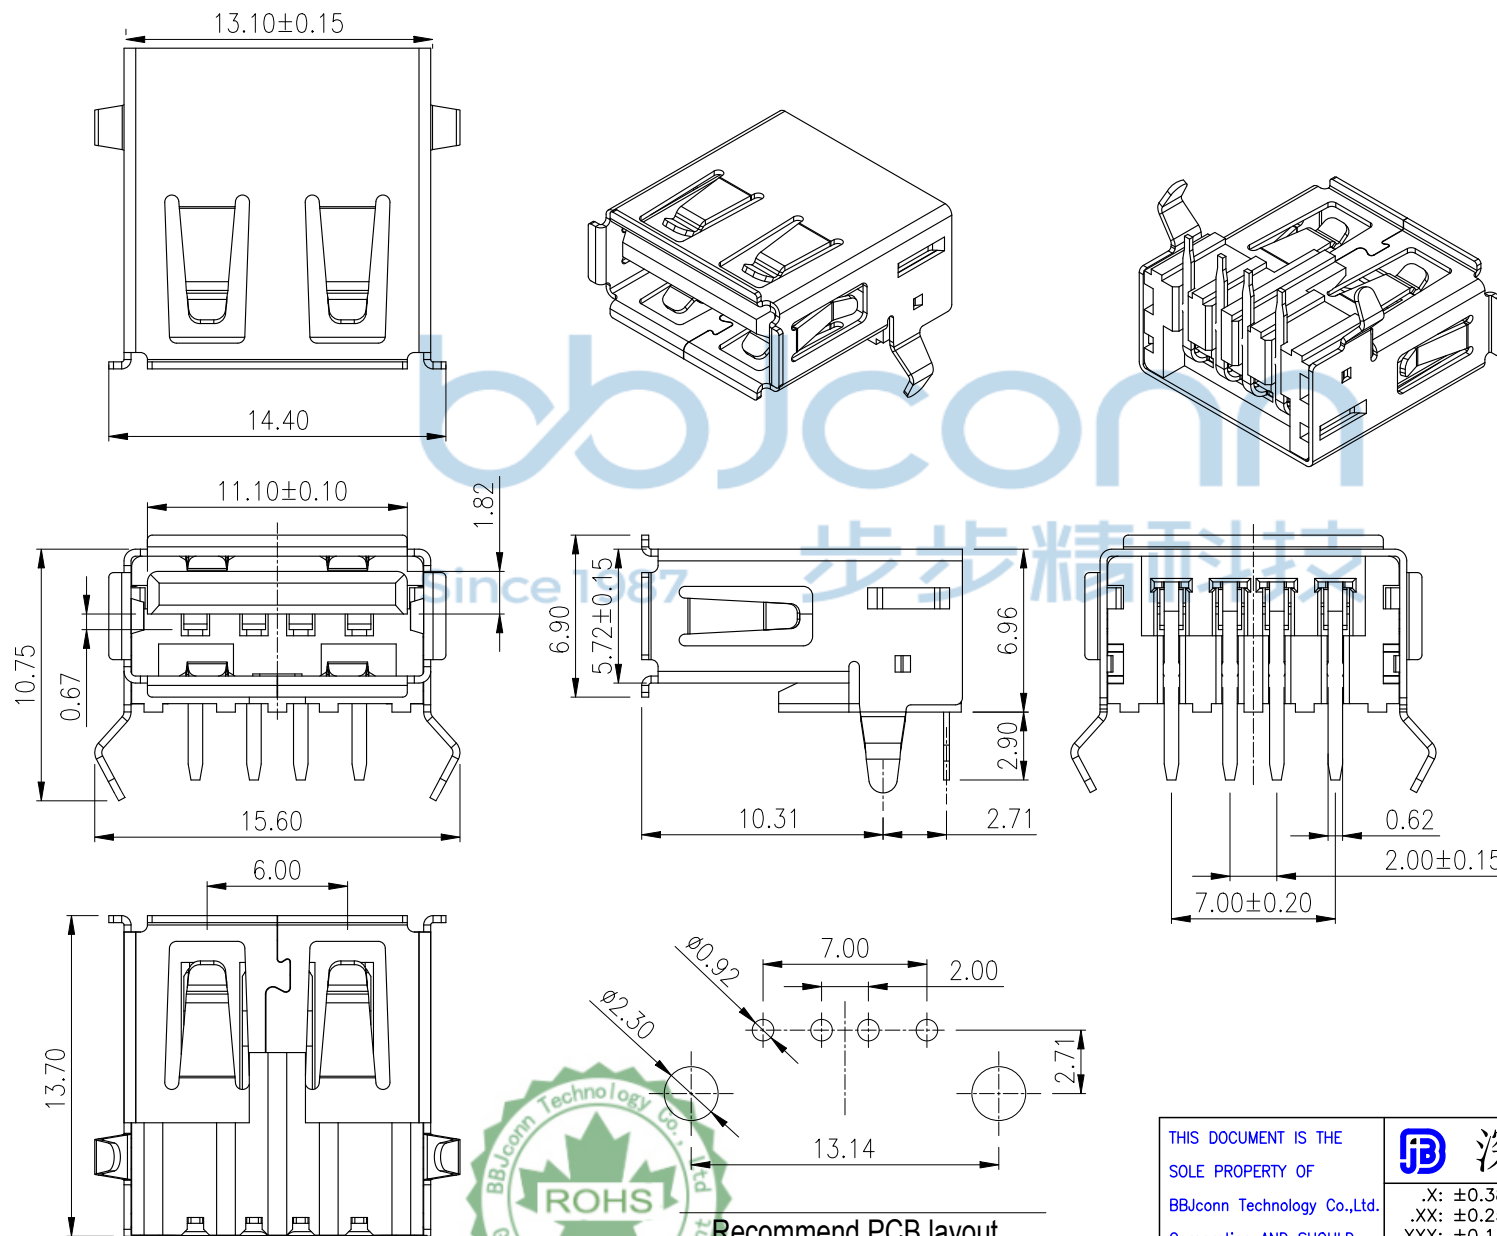

Recommend PCB layout

注:

1. 机械性能:

插入力: 35N Max.

拔出力: 10N Min.

耐插拔: 3000 次

工作温度: 0°C ~ +50°C

储存温度: -20°C ~ 60°C

2. 电性能:

额定电流: 1.5A Max.

接触阻抗: 30 mΩ Max.


耐高压: 500V AC Min.

绝缘阻抗: 1000 MΩ Min.



黑胶 (PBT) 铜	C2680, 镀镍50-80u	PBT V0, 黑色	C2680-EH, T=0.25, 半金锡
规格	外壳	胶体	端子

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co., Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司	
.X: ±0.38	.X*: ±3*	NAME: USB 2.0 AF 90度 L=13.70 后两脚插 弯脚 无后盖 端子DIP 卷边 PBT黑胶 铁壳	
.XX: ±0.25	.X*: ±2*		
.XXX: ±0.13	.XX*: ±1*	PJ NO: 127-272-040041-W7G	
APPD	JM_Zheng	SIZE: A4 DRW NO:	
CHKD	Tang	FINISH: SEE NOTES MAT'L: SEE NOTES	
PDWG NO: 0383-1	DR LYX	SCALE: N/A	REV: A0 UNIT: mm PAGE: 1/2

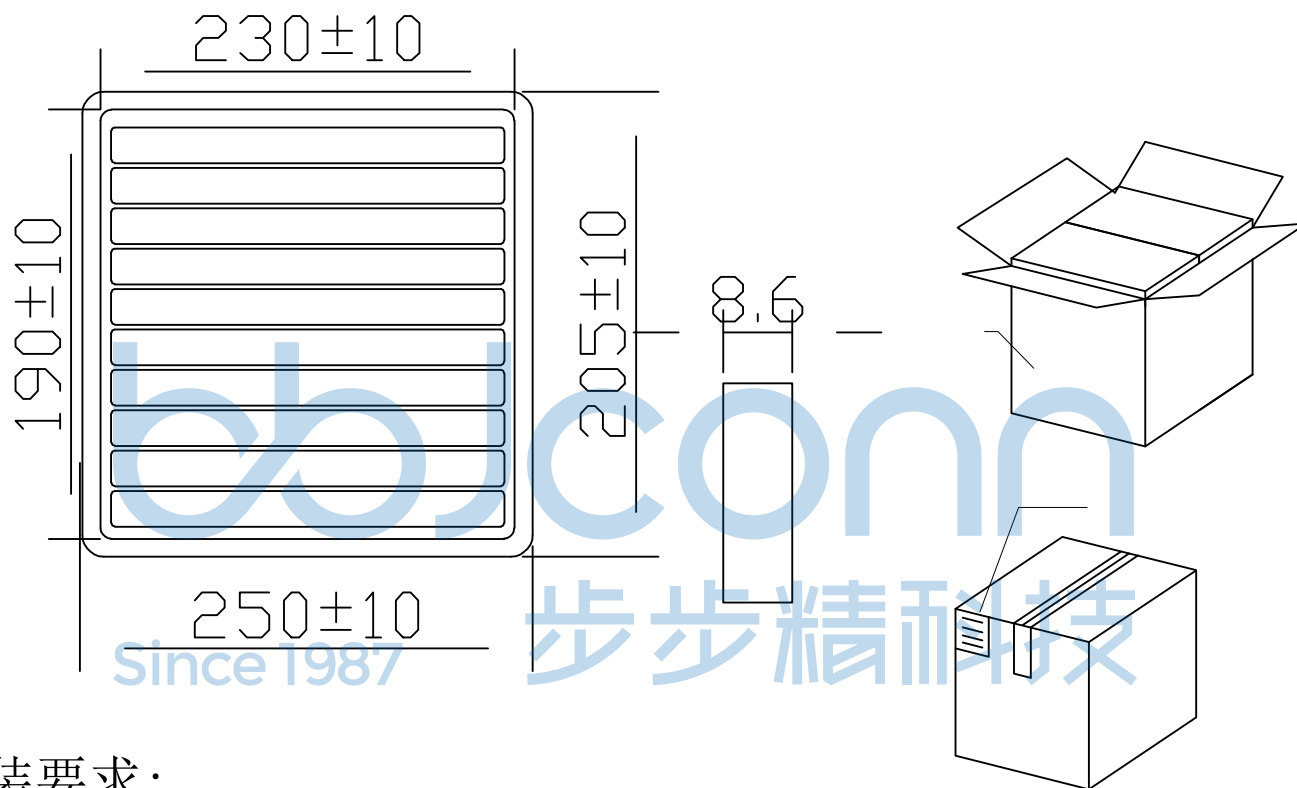

1. 包装要求:
- 1.1 每盒吸塑盒包装100pcs;
 - 1.2 每20盘放一箱, 共计2000PCS;
 - 1.3 纸箱外贴上标签。

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司		NAME:USB 2.0 AF 90度 L=13.70 后两脚插 弯脚 无后盖 端子DIP 卷边 PBT黑胶 铁壳	
.X: ±0.38 .XX: ±0.25 .XXX: ±0.13		X*: ±3* .X*: ±2* .XX*: ±1*		PJ. NO.: 127-272-040041-W7G	
APPD. JM_Zheng		CHKD. LYX		SIZE: A4 DRW NO.:	
PDWG.NO: 0383-1		DR. TSP		FINISH: SEE NOTES MAT'L.: SEE NOTES	
				SCALE: N/A REV.: A0 UNIT: mm PAGE: 2/2	