
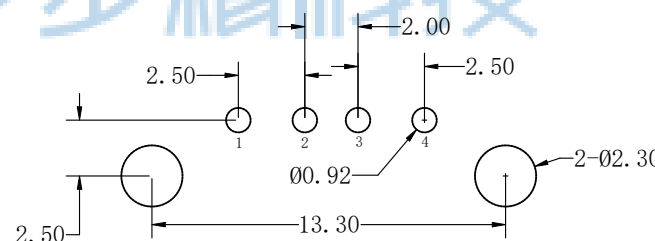
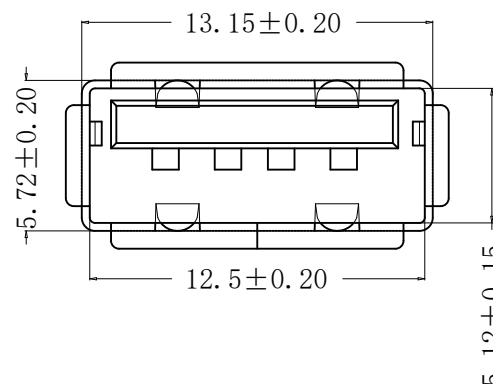





REV.	ECN NO	CONTENT	DATE	ENGINEER
A0				

备注:

1. 材质:
1-1 塑胶: pbt
1-2 端子: 黄铜C2680
1-3 外壳: SPCC/2680
2. 电镀:
端子接触区域: 镀金G/F
端子锡脚: 镀锡80u"min.
端子整个表面: 镀镍30u"min.
外壳: 镀镍80u"min
3. 电气性能:
3-1 耐电压: 500V 交流电
3-2 接触电阻: 50 毫欧 最大
3-3 绝缘阻抗: 500 兆欧最小
4. 机械性能
4-1 插入力: 3.5kgf MAX
4-2 拨出力: 1.02kgf MIN
5. 环境
温度范围: -55° C TO +85° C

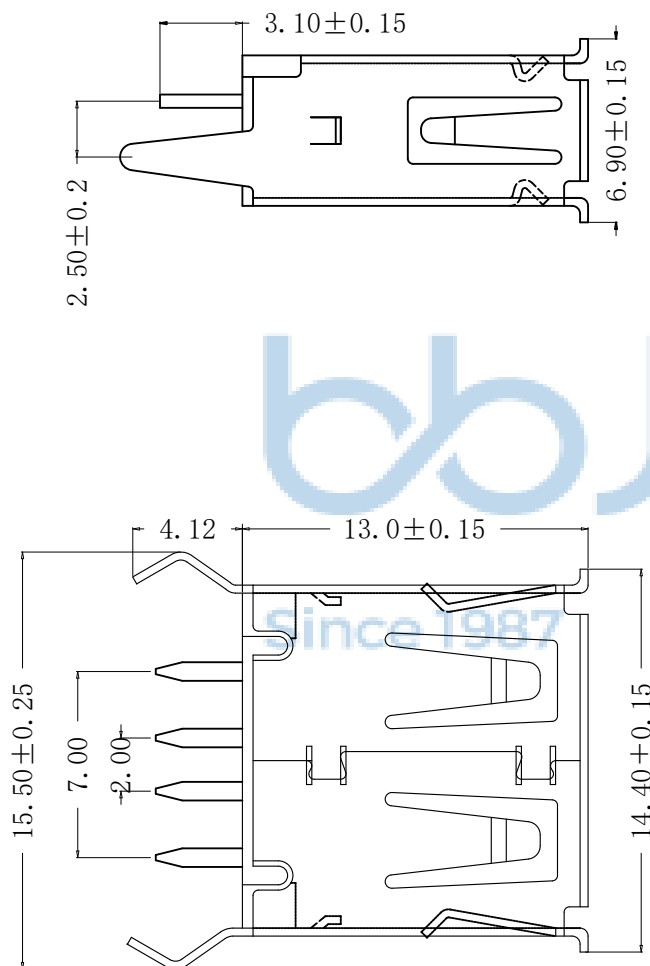

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司	
.X: ±0.38 .XX: ±0.25 .XXX: ±0.13	X*: ±3" .X*: ±2" .XX*: ±1"	NAME: USB 2.0 AF 180度 两脚插 弯脚 H=13.0 端子DIP 卷边 PBT白胶 铜壳	
APPD.	JM_Zheng	PJ. NO.: 127-275-040012-W7G	
CHKD.	LYX	SIZE: A4 DRW NO.:	
PDWG.NO: 0383-1	DR.	LHC	FINISH: SEE NOTES SCALE: N/A REV.: A0 UNIT: mm PAGE: 1/2

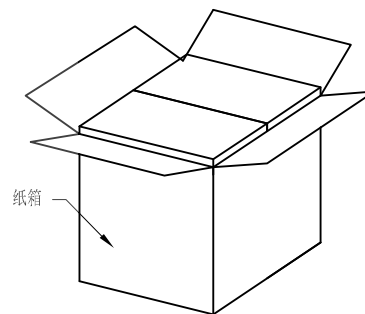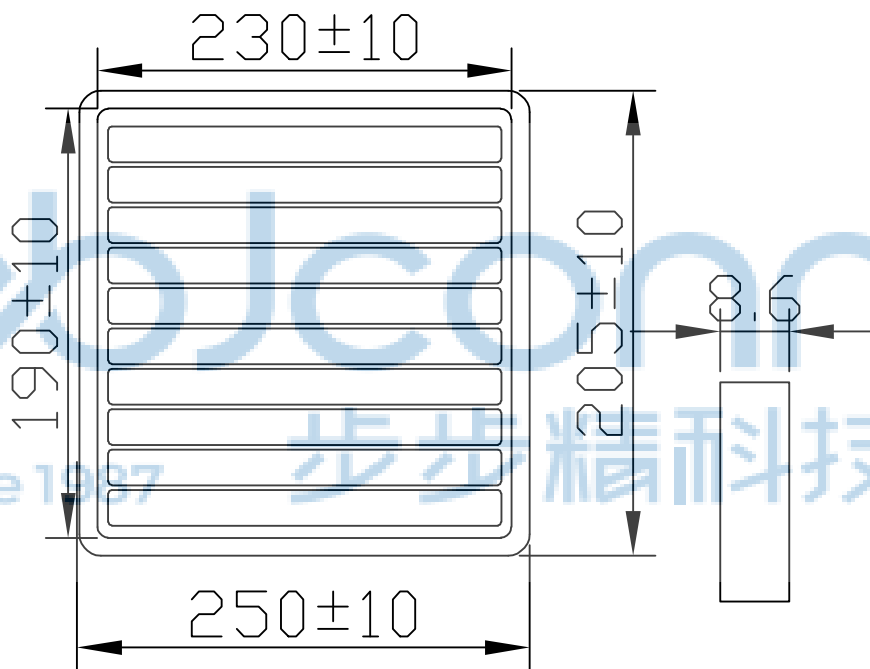

纸箱规格: 350*210*290



1. 包装要求:

- 1.1 每盒吸塑盒包装100 pcs;
- 1.2 每 20 盘放一箱, 共计 2000 PCS;
- 1.3 纸箱外贴上标签



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION. PDWG.NO: 0383-1		深圳市步步精科技有限公司		NAME: USB 2.0 AF 180度 两脚插 弯脚 H=13.0 端子DIP 卷边 PBT白胶 铜壳	
.X: ±0.38 .XX: ±0.25 .XXX: ±0.13		X*: ±3* .X*: ±2* .XX*: ±1*		PJ. NO.: 127-275-040012-W7G	
APPD. JM_Zheng		CHKD. LYX		DR. LHC	
FINISH: SEE NOTES		SCALE: N/A		REV.: A0	
MAT'L.: SEE NOTES		UNIT: mm		PAGE: 2/2	