
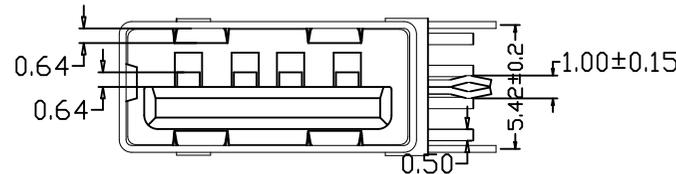


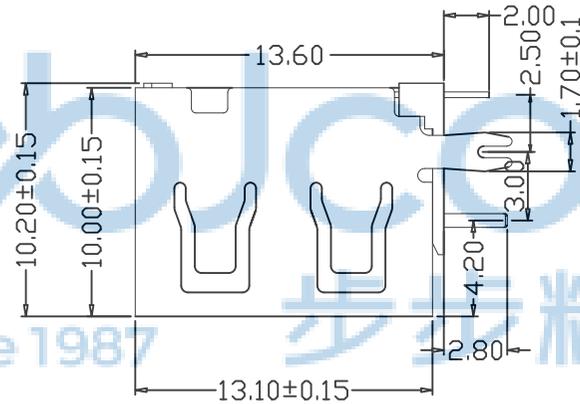
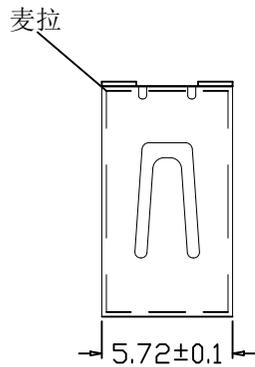
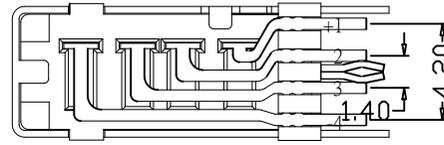


REV.	ECN NO.	CONTENT	DATE	ENGINEER
A0		Initial release	/	LQ

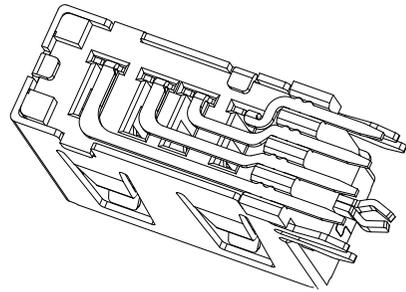

规格说明: Specifications:

电气特性: Electrical:

1. 额定电流: Current Rating
1.5A/contact terminal
2. 额定电压: Voltage Rating
30V DC
3. 接触阻抗: Contact Resistance
30 milliohms MAX
4. 耐电压: Dielectric Withstanding Voltage:
500 V AC AT Sea Level
5. 绝缘阻抗: Insulation Resistance:
1000MEGA ohms MIN

物理性能: Mechanical:

1. 插拔力: Connector Mate and Unmate Force
Mate force: 3.57kgf(MAX)
Unmate force: 1.02kgf(MIN)
2. 端子保持力: Terminal Retention
1.02kgf(MIN)

原材料: Material:

1. 塑胶: Housing: lcp
Hing Temperature Thernmaplastics,
2. 端子: Contact: Copper Alloy C2680
3. 外壳: Shell: Copper Alloy SPCC






电镀: Finish:

1. 端子: Contact: 端子镀: 半金锡G/F
2. 外壳: Shell: 盐雾24H 外壳四周镀80U”(MIN)镍

Nickel Plating



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co., Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司	
PDWG.No: 0383-1		.X: ±0.38 .XX: ±0.25 .XXX: ±0.13	X*: ±3" .X*: ±2" .XX*: ±1"
APPD.	JM_Zheng	NAME: USB 2.0 AF 90度 侧插 短体 三脚插 L=10.0 端子DIP 平口 LCP黑胶 铜壳 贴麦拉 编带	
CHKD.	LYX	PJ. NO.: 127-278-040001-W7G	
DR.	LQ	SIZE: A4 DRW NO.:	
		FINISH: SEE NOTES MAT'L.: SEE NOTES	
		SCALE: N/A	REV.: A0 UNIT: mm PAGE: 1/2

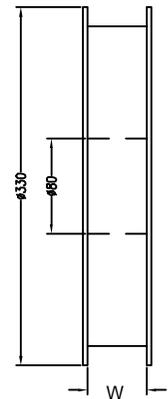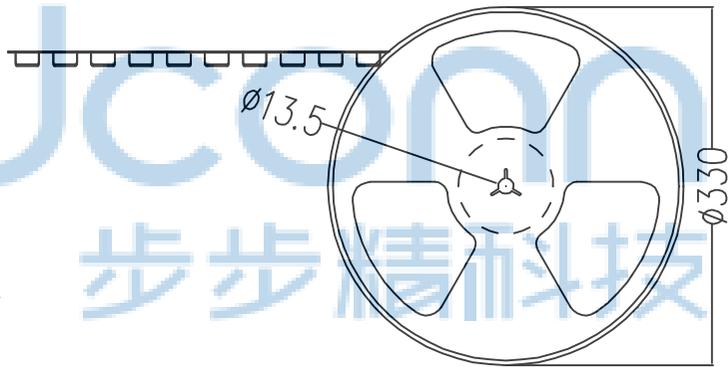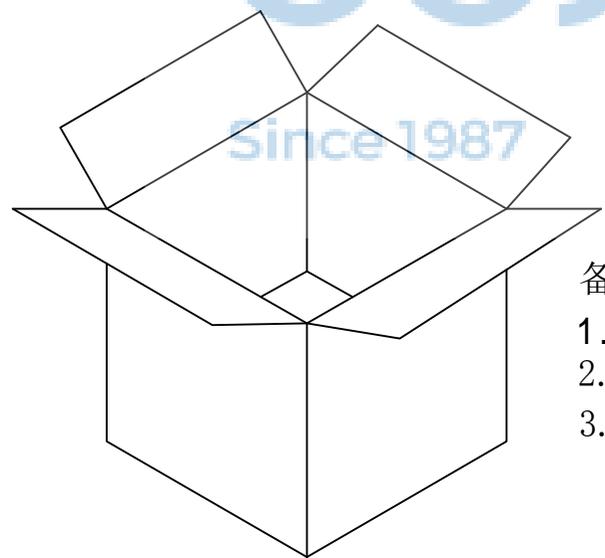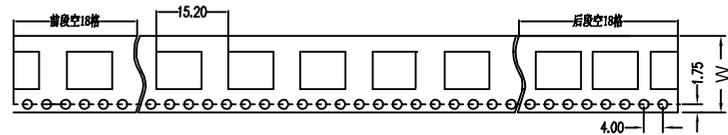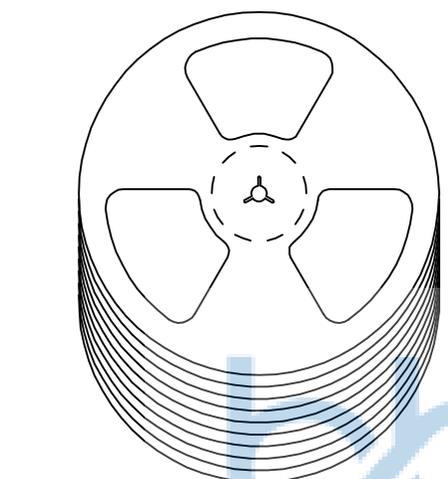

备注:

1. 包装数量：300/PCS/卷，10卷/箱。
2. 包装袋长度：每卷前后各空10-20个空格，中间包装。
3. 材质：
 载体：聚丙烯（PS），阻抗 $10^{6-9} \Omega$
 上带：聚乙烯（PET），阻抗 $10^{6-11} \Omega$
 卷盘：聚苯乙烯。

纸箱规格：345*345*230MM
 纸箱规格：345*345*350MM

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司	
.X: ±0.38 .XX: ±0.25 .XXX: ±0.13		X': ±3" X'': ±2" XX': ±1"	
APPD.	JM_Zheng	NAME: USB 2.0 AF 90度 侧插 短体 三脚插 L=10.0 端子DIP 平口 LCP黑胶 铜壳 贴麦拉 编带	
CHKD.	LYX	PJ. NO.: 127-278-040001-W7G	
DR.	GZY	SIZE: A4 DRW NO.:	
PDWG.NO: 0383-1		FINISH: SEE NOTES MAT'L.: SEE NOTES	
		SCALE: N/A REV.: A0 UNIT: mm PAGE: 2/2	